
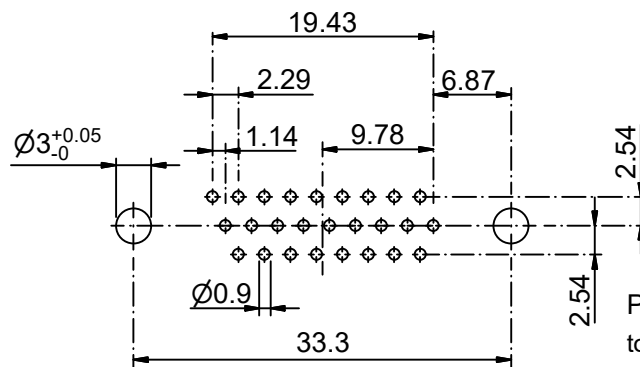
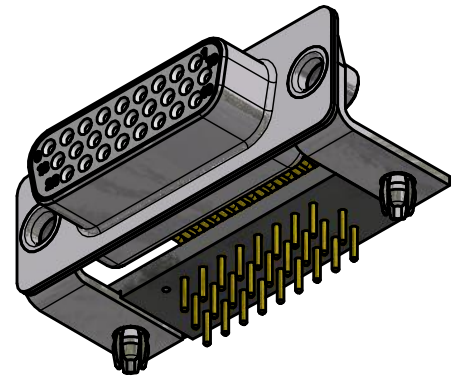
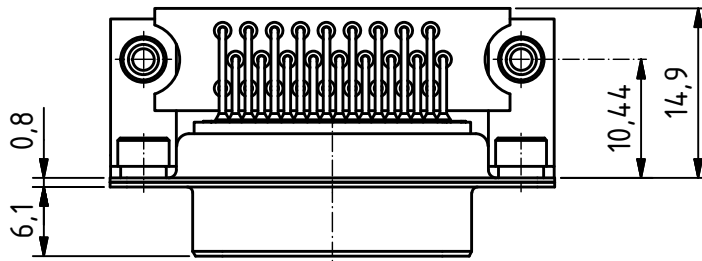
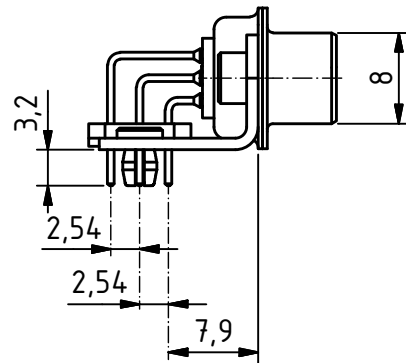


RoHS compliant

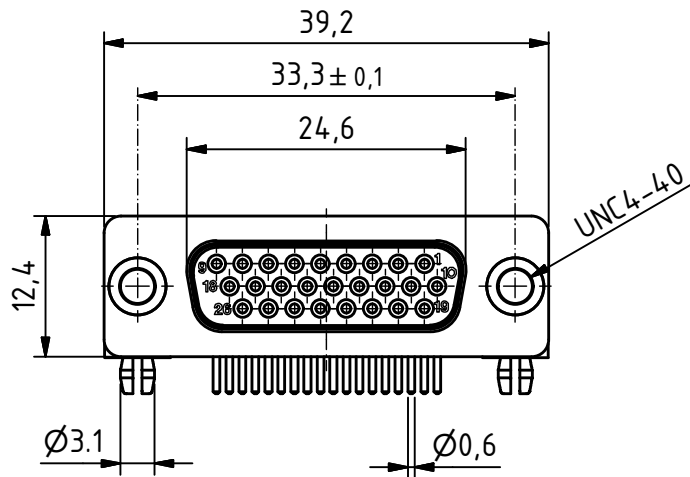

PCB Layout
tolerances +/-0.1

MATERIALS


- Insulator: Thermoplastic UL 94-V-0 white
- Contact: Machined / Copper alloy
- Contact finish: Quality class 2
- Shell: steel tin plated

CHARAKTERISTICS

- Working voltage: 60V
- Current rating: 5A
- Contact resistance: max. 10mΩ - DIN41652
- Insulation resistance: >5GΩ
- Temperature range: -55° to +125°C

Product is
suitable for
Wave Solder
Process

General tolerances (Deltron standard)				
size in mm				
> 0.5	> 3	> 6	> 30	
up to 3	up to 6	up to 30	up to 120	
tolerances				
±0.1	±0.2	±0.2	±0.3	

	All dimensions in mm	Rev.	Rev.	Rev.	DE009856 part no.		
		Rev.	Rev.	Rev.			
HD-D26SYC/2M47HUN				1.5:1 scale	drawn	25.06.2013	mw
					checked		
					approved		
				K061431 drawing no.			
Industrie NeuhoF 8c CH-3422 Kirchberg www.d-sub.swiss							