


This drawing must not without our, permission be copied, im-
parted to a third party or otherwise used without authorisa-
tion. Contravention will be prosecuted.

Denna ritning är vår egendom och skyddas enligt gällande lag
samt får ej utan vårt medgivande kopieras, delgivas annan eller
obehörigen användas.

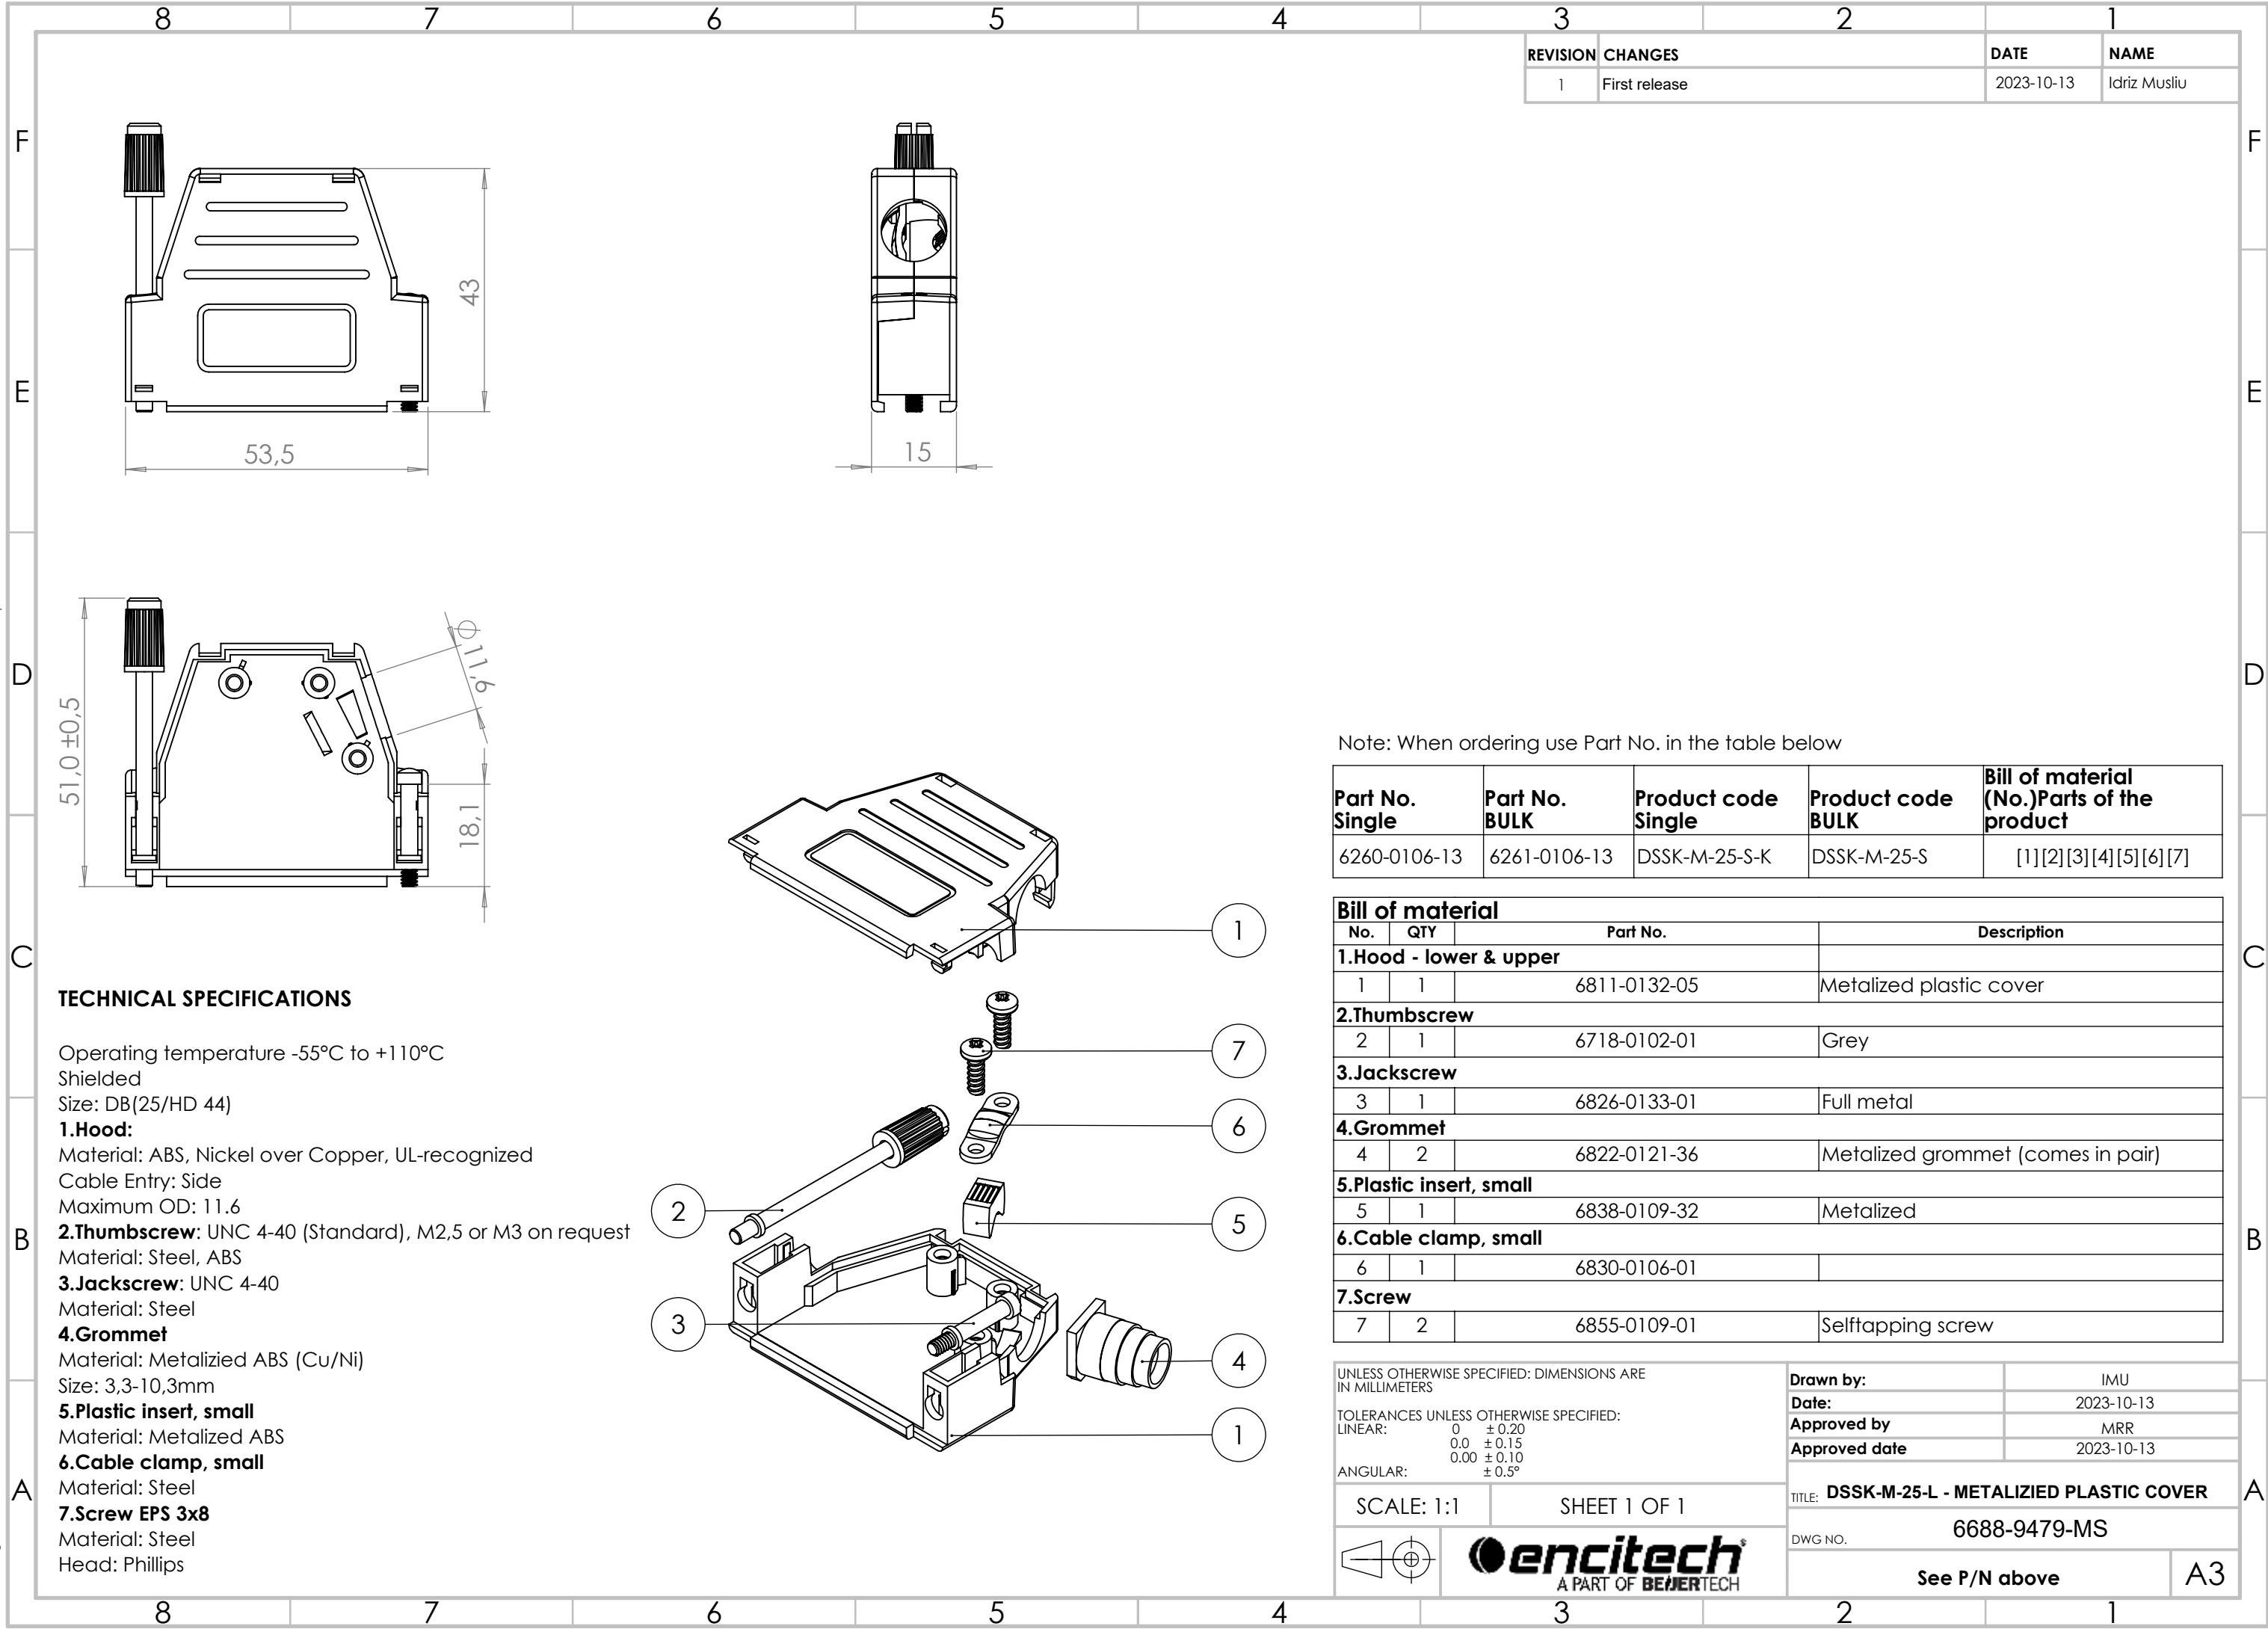


TECHNICAL SPECIFICATIONS

Operating temperature -55°C to +110°C
Shielded
Size: DB(25/HD 44)
1.Hood:
Material: ABS, Nickel over Copper, UL-recognized
Cable Entry: Side
Maximum OD: 11.6
2.Thumbscrew: UNC 4-40 (Standard), M2,5 or M3 on request
Material: Steel, ABS
3.Jackscrew: UNC 4-40
Material: Steel
4.Grommet
Material: Metalized ABS (Cu/Ni)
Size: 3,3-10,3mm
5.Plastic insert, small
Material: Metalized ABS
6.Cable clamp, small
Material: Steel
7.Screw EPS 3x8
Material: Steel
Head: Phillips

Note: When ordering use Part No. in the table below

Part No. Single	Part No. BULK	Product code Single	Product code BULK	Bill of material (No.)Parts of the product
6260-0106-13	6261-0106-13	DSSK-M-25-S-K	DSSK-M-25-S	[1][2][3][4][5][6][7]

Bill of material			
No.	QTY	Part No.	Description
1.Hood - lower & upper			
1	1	6811-0132-05	Metalized plastic cover
2.Thumbscrew			
2	1	6718-0102-01	Grey
3.Jackscrew			
3	1	6826-0133-01	Full metal
4.Grommet			
4	2	6822-0121-36	Metalized grommet (comes in pair)
5.Plastic insert, small			
5	1	6838-0109-32	Metalized
6.Cable clamp, small			
6	1	6830-0106-01	
7.Screw			
7	2	6855-0109-01	Selftapping screw

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS		Drawn by:	IMU
TOLERANCES UNLESS OTHERWISE SPECIFIED:		Date:	2023-10-13
LINEAR:		Approved by	MRR
0 ± 0.20		Approved date	2023-10-13
0.0 ± 0.15		TITLE: DSSK-M-25-L - METALIZED PLASTIC COVER	
0.00 ± 0.10		6688-9479-MS	
ANGULAR:		DWG NO.	
± 0.5°		See P/N above	
SCALE: 1:1		SHEET 1 OF 1	
		A3	
A PART OF BEIJERTECH			