


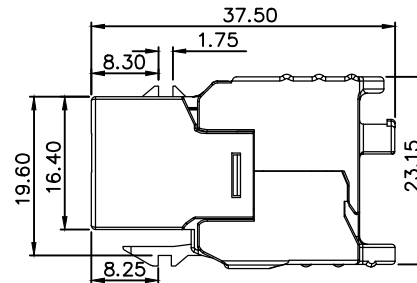





RoHS

THIS IS A RoHS
COMPLIANT
COMPONENT/
PRODUCT.

Suggested Frame Dimension



NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS.
2. CURRENT RATING: 1.5 AMP.
3. CONTACT RESISTANCE: 100 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH: 750 VAC RMS 60Hz,1MIN.
6. C6A CONNECTING HARDWARE:
CONFORM TO ANSI/TIA/EIA-568.2-D

ENVIRONMENTAL:

1. STORAGE: -40°C TO +85°C.
2. OPERATION: -40°C TO +85°C.

CONFORM TO TIA/EIA 568B

MATES WITH MODULAR PLUG CONFORMING TO
TIA-1096-A.

MECHANICAL:

1. HOUSING MATERIAL: ZINC ALLOY-3, WITH NICKEL PLATING
2. INSERT & COVER MATERIAL: PC UL94V-0
3. PCB MATERIAL: FR-4
4. CONTACT MATERIAL: PHOSPHOR BRONZE
5. IDC CONTACT MATERIAL: PHOSPHOR BRONZE
WITH SILVER OR NICKEL PLATING
6. WIRE : AWG 23~26

$\triangle X0$	0000000	NEW DESIGN		HENRY	122719'
MARK	ECN-NO.	REVISION RECORD		DRAWN	DATE
		UNLESS OTHERWISE SPECIFIED TOLERANCE		SCALE	CHECKED
		Dimension Range	Tolerance	1:1	APPROVED
		X.X	±0.20	UNIT	
		X.XX	±0.15	mm	
		X.XXX	±0.10	SIZE	
Material/Plated/Notes		ANGLE	±5°	A3	SHEET 1/1
SEE NOTE		CAT.6A TOP ENTRY SLIM TYPE KEYSTONE JACK FTP			
Tooling No.		PART NO.	326I-0006-05		REV.
		DOC. NO.			0

Design drawing