


This drawing must not without our, permission be copied, im-
parted to a third party or otherwise used without authorisa-
tion. Contravention will be prosecuted.

Denna ritning är vår egendom och skyddas enligt gällande lag
samt får ej utan vårt medgivande kopieras, delgivas annan eller
obehörigen användas.

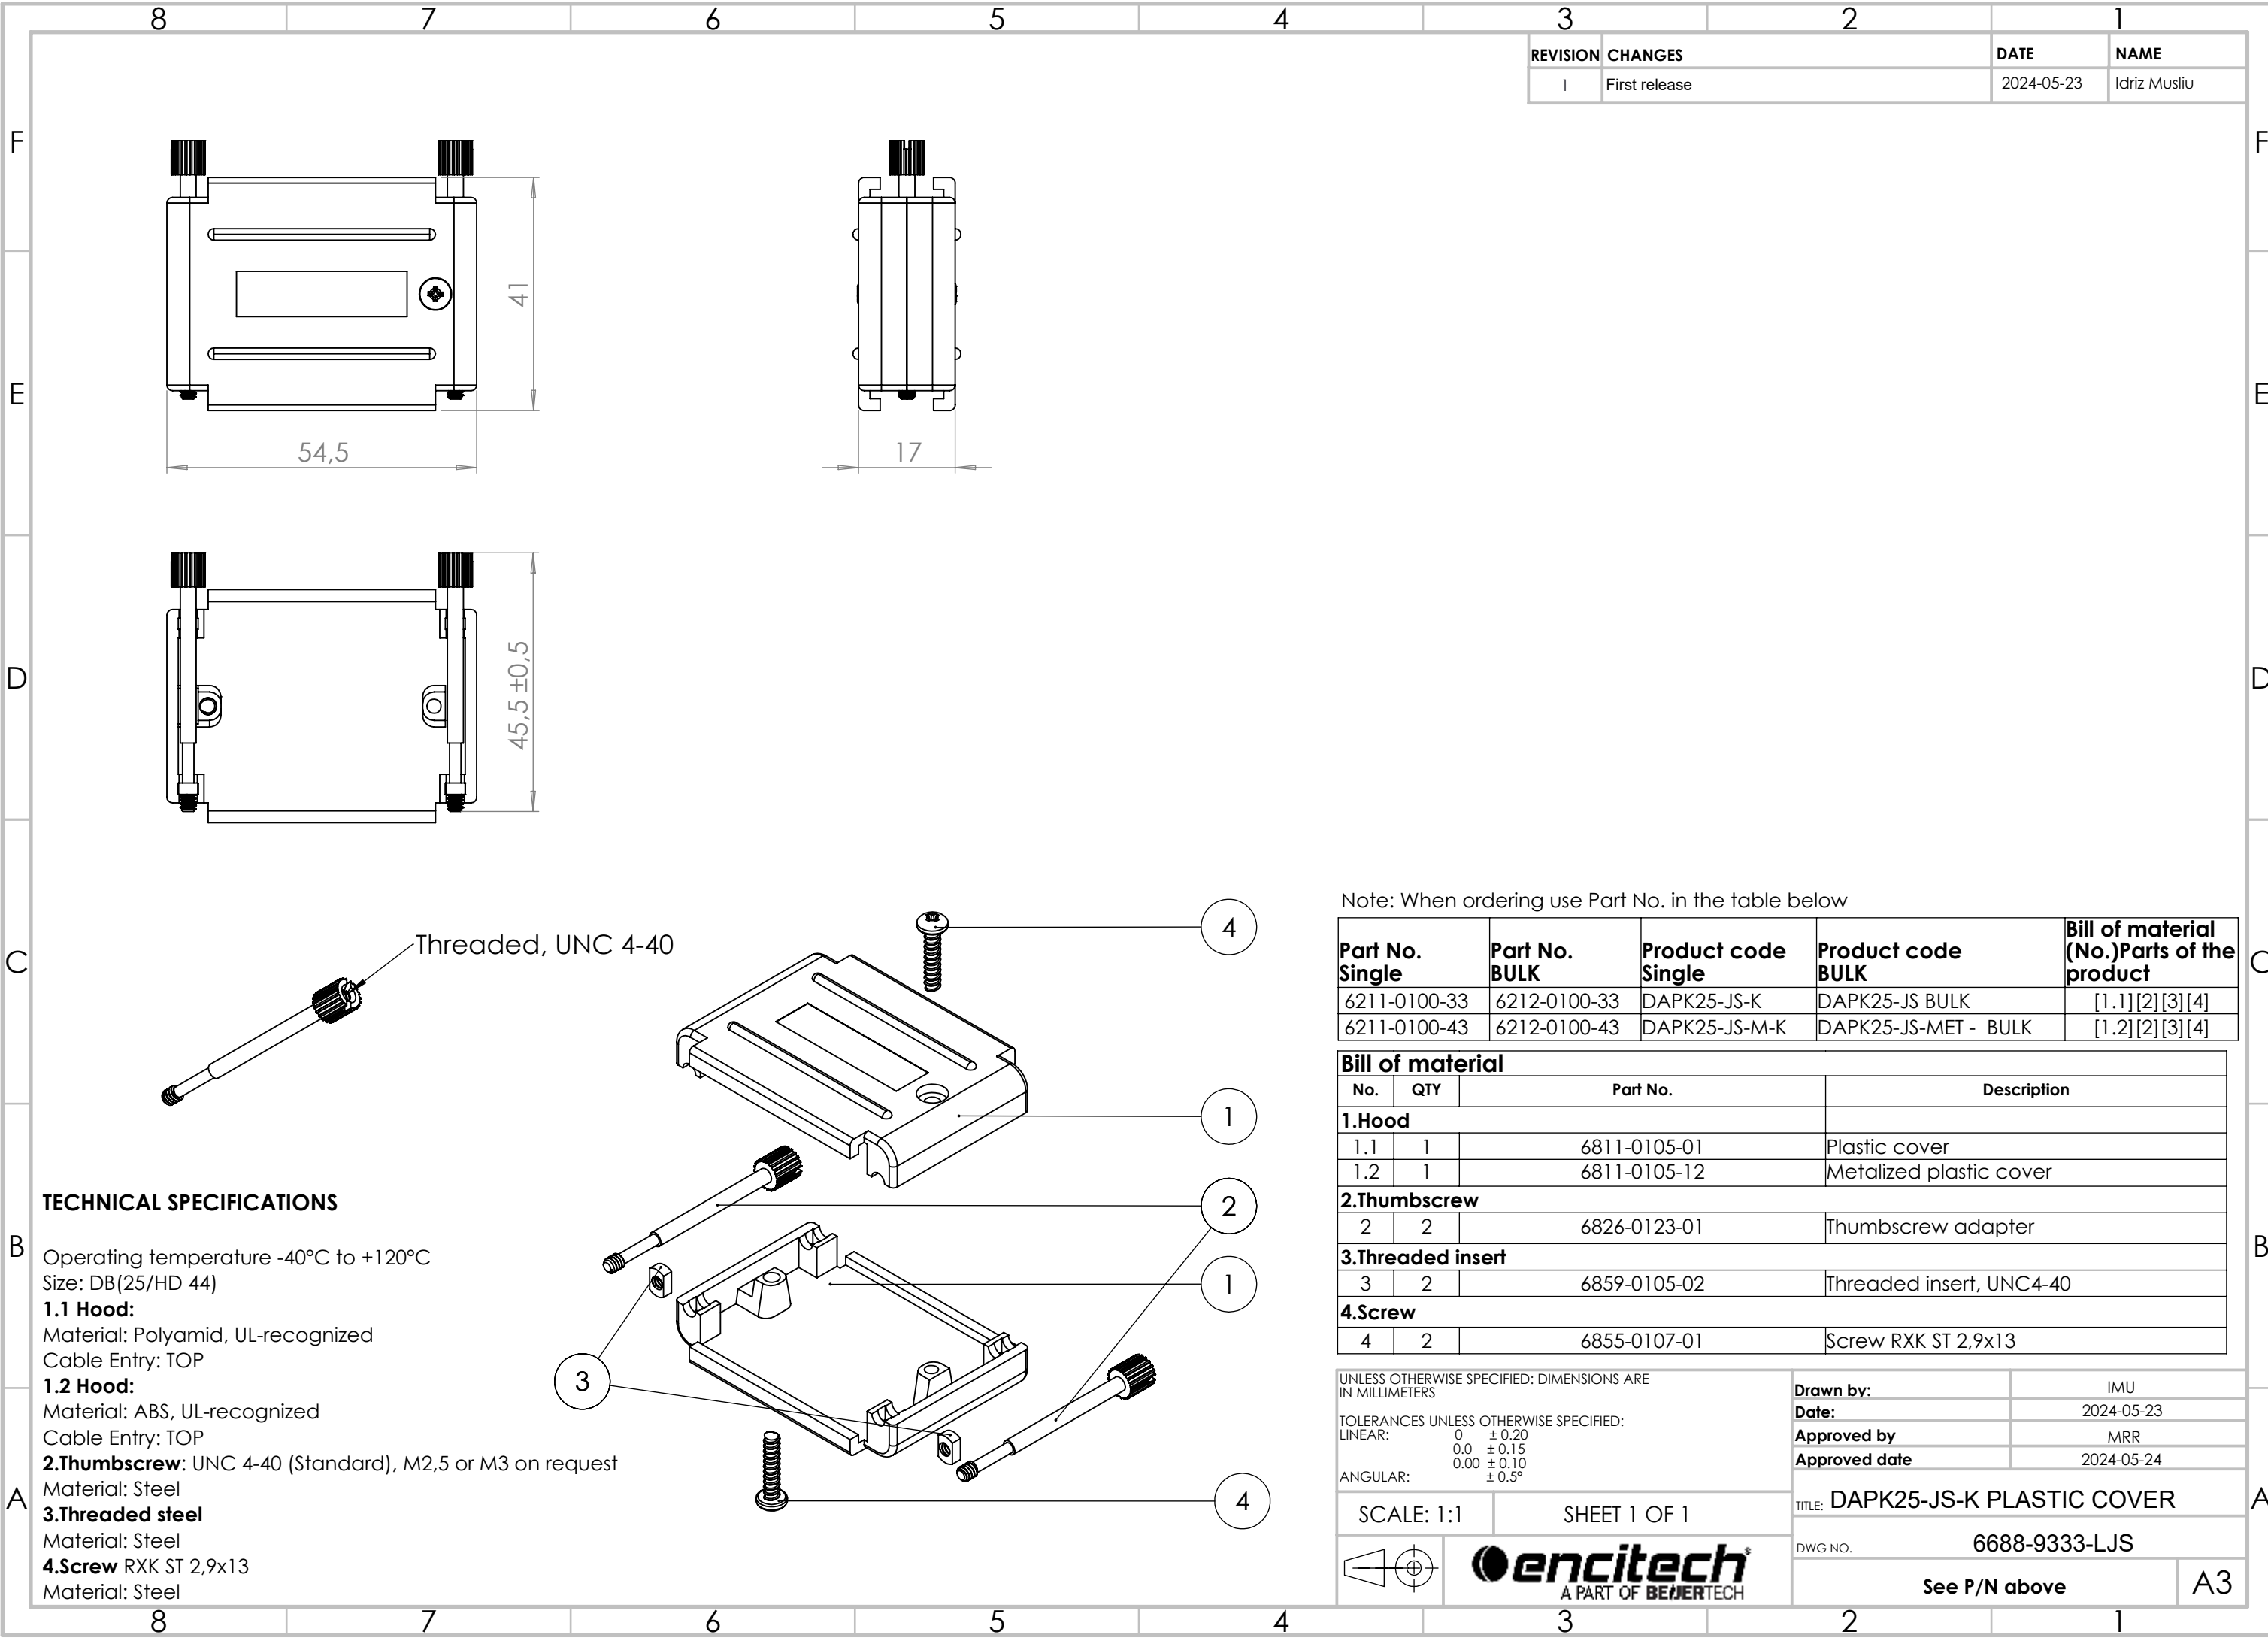

TECHNICAL SPECIFICATIONS

- Operating temperature -40°C to +120°C
Size: DB(25/HD 44)
1.1 Hood:
Material: Polyamid, UL-recognized
Cable Entry: TOP
1.2 Hood:
Material: ABS, UL-recognized
Cable Entry: TOP
2.Thumbscrew: UNC 4-40 (Standard), M2,5 or M3 on request
Material: Steel
3.Threaded steel
Material: Steel
4.Screw RXK ST 2,9x13
Material: Steel

Note: When ordering use Part No. in the table below

Part No. Single	Part No. BULK	Product code Single	Product code BULK	Bill of material (No.)Parts of the product
6211-0100-33	6212-0100-33	DAPK25-JS-K	DAPK25-JS BULK	[1.1][2][3][4]
6211-0100-43	6212-0100-43	DAPK25-JS-M-K	DAPK25-JS-MET - BULK	[1.2][2][3][4]

Bill of material				
No.	QTY	Part No.		Description
1.Hood				
1.1	1	6811-0105-01		Plastic cover
1.2	1	6811-0105-12		Metalized plastic cover
2.Thumbscrew				
2	2	6826-0123-01		Thumbscrew adapter
3.Threaded insert				
3	2	6859-0105-02		Threaded insert, UNC4-40
4.Screw				
4	2	6855-0107-01		Screw RXK ST 2,9x13

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS TOLERANCES UNLESS OTHERWISE SPECIFIED: LINEAR: 0 ± 0.20 0.0 ± 0.15 0.00 ± 0.10 ± 0.5° ANGULAR:		Drawn by:	IMU
		Date:	2024-05-23
		Approved by	MRR
		Approved date	2024-05-24
SCALE: 1:1		SHEET 1 OF 1	
DWG NO.		6688-9333-LJS	
		See P/N above	
		A3	

