


This drawing must not without our, permission be copied, im-
parted to a third party or otherwise used without authorisa-
tion. Contravention will be prosecuted.

Denna ritning är vår egendom och skyddas enligt gällande lag
samt får ej utan vårt medgivande kopieras, delgivas annan eller
obehörigen användas.

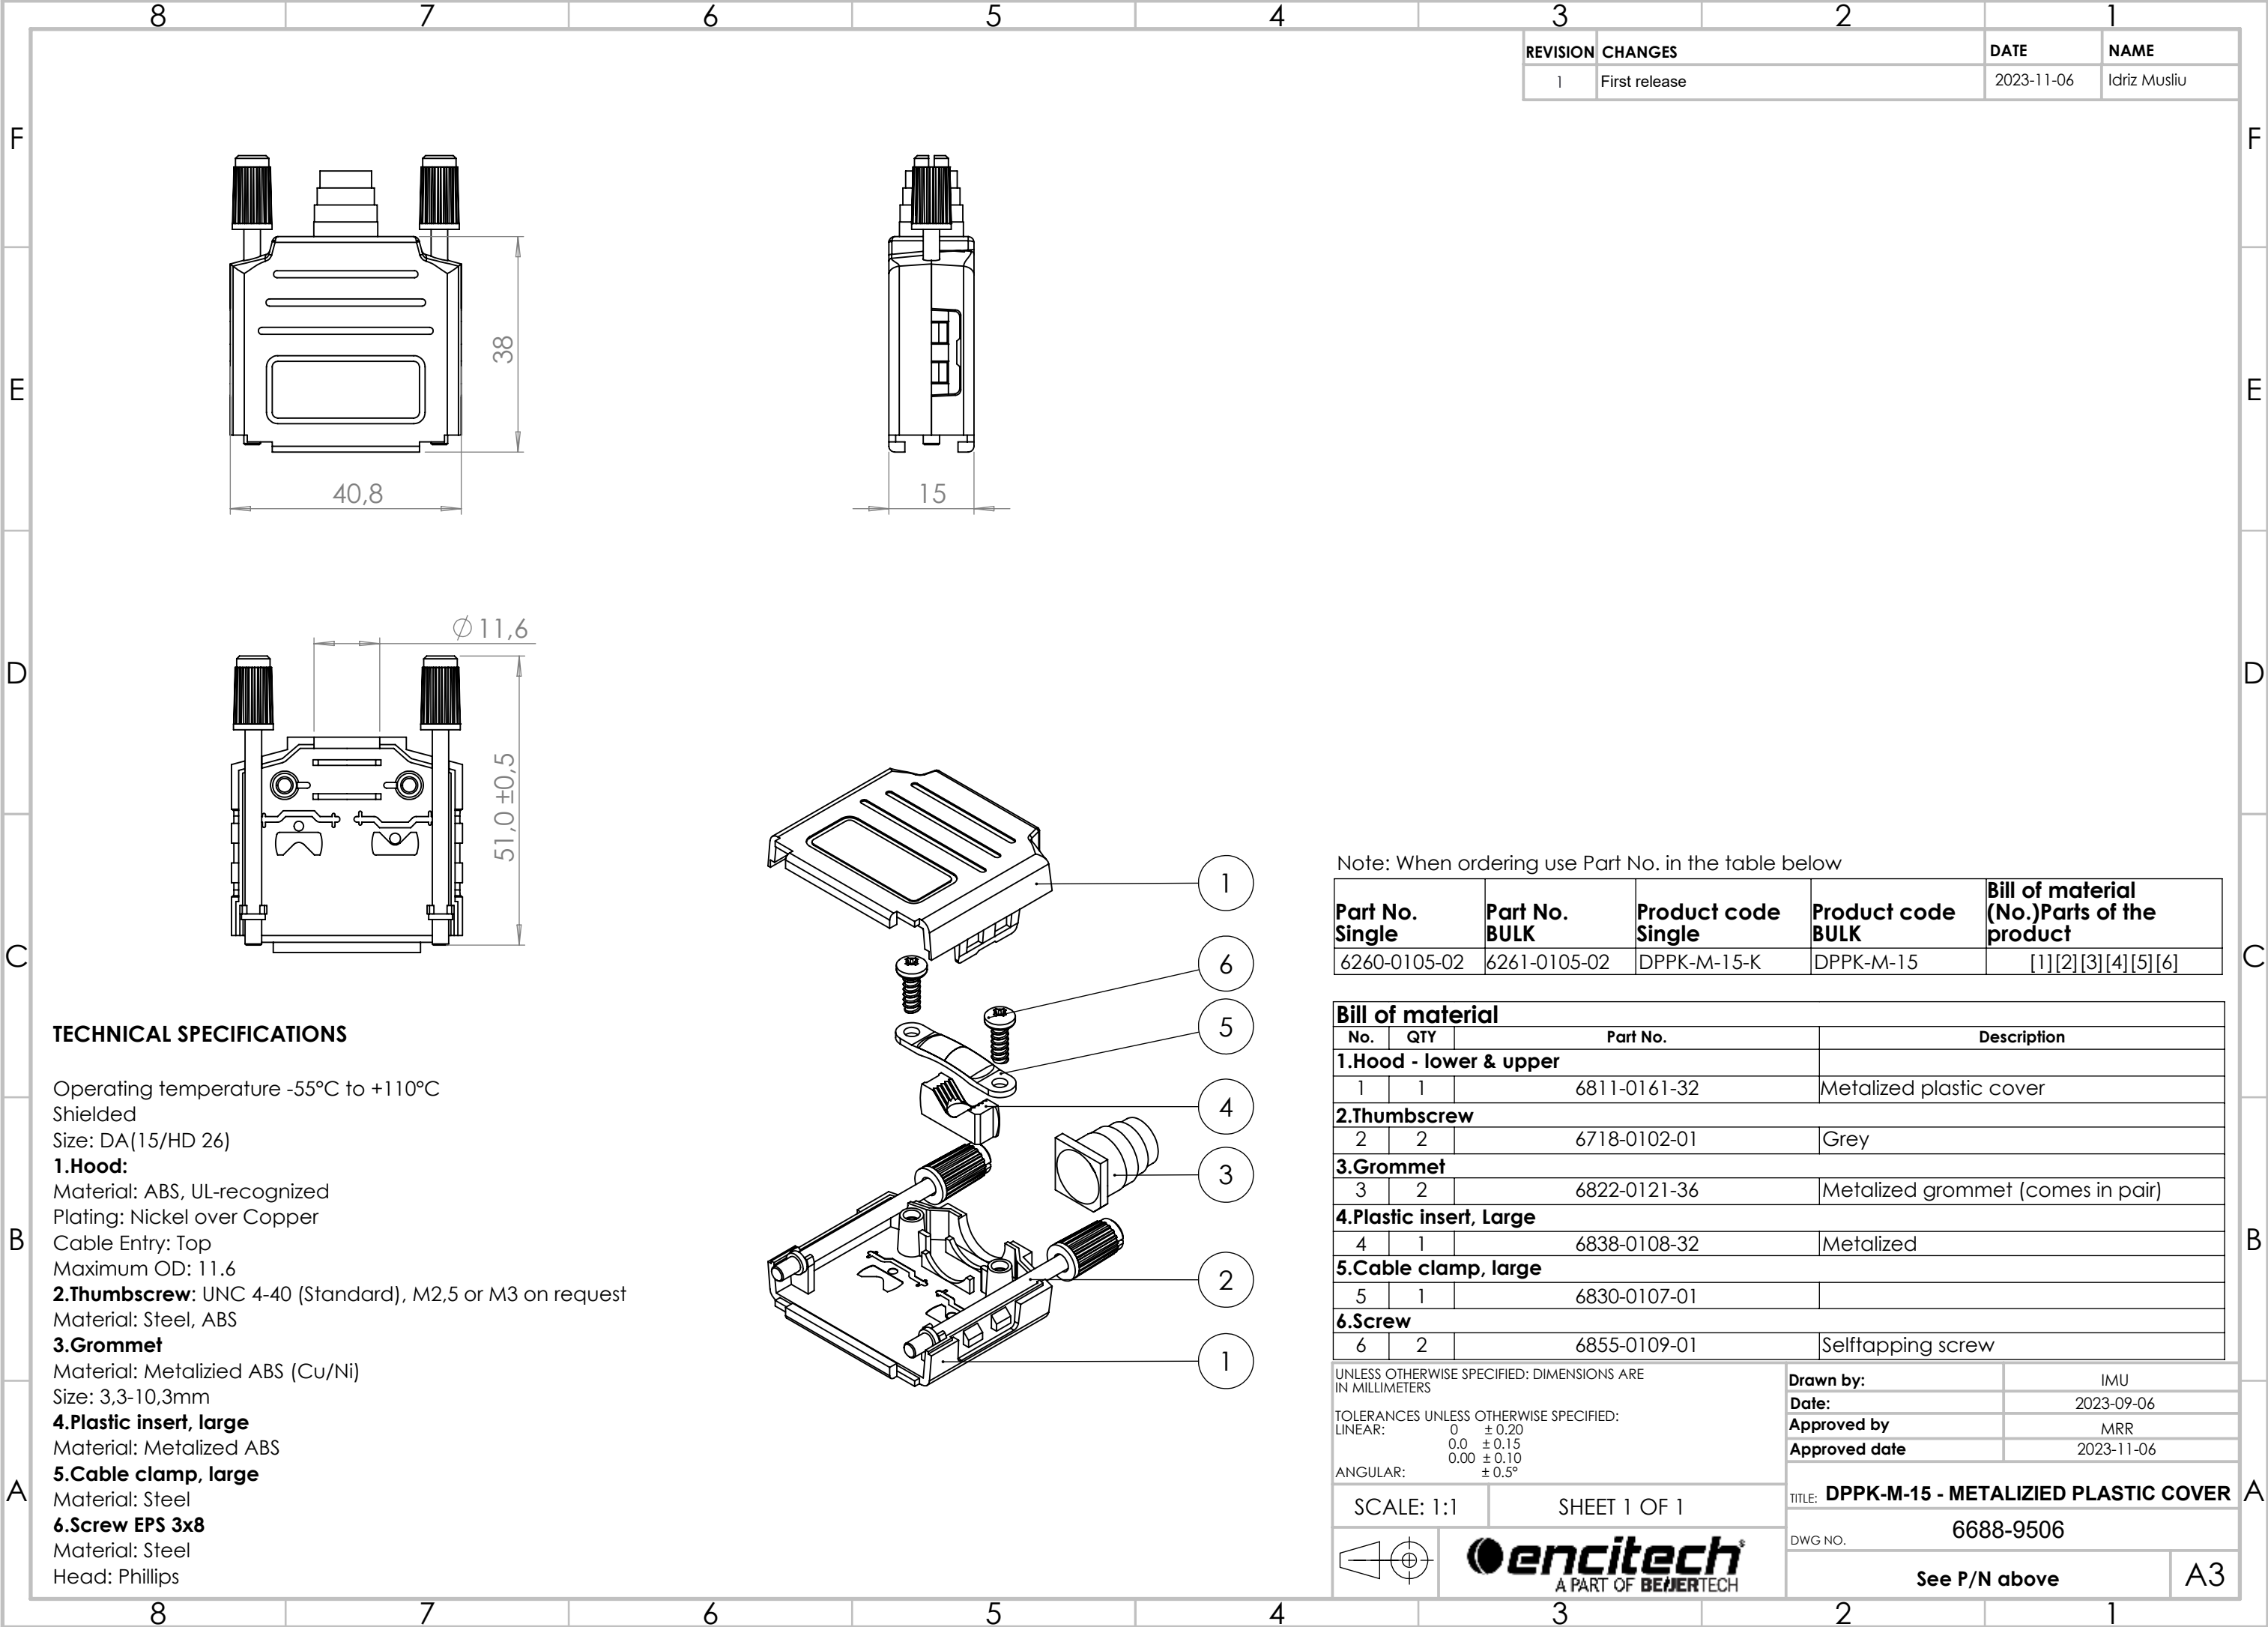

TECHNICAL SPECIFICATIONS

Operating temperature -55°C to +110°C
Shielded
Size: DA(15/HD 26)
1.Hood:
Material: ABS, UL-recognized
Plating: Nickel over Copper
Cable Entry: Top
Maximum OD: 11.6
2.Thumbscrew: UNC 4-40 (Standard), M2,5 or M3 on request
Material: Steel, ABS
3.Grommet
Material: Metalized ABS (Cu/Ni)
Size: 3,3-10,3mm
4.Plastic insert, large
Material: Metalized ABS
5.Cable clamp, large
Material: Steel
6.Screw EPS 3x8
Material: Steel
Head: Phillips

Note: When ordering use Part No. in the table below


Part No. Single	Part No. BULK	Product code Single	Product code BULK	Bill of material (No.)Parts of the product
6260-0105-02	6261-0105-02	DPPK-M-15-K	DPPK-M-15	[1][2][3][4][5][6]

Bill of material			
No.	QTY	Part No.	Description
1.Hood - lower & upper			
1	1	6811-0161-32	Metalized plastic cover
2.Thumbscrew			
2	2	6718-0102-01	Grey
3.Grommet			
3	2	6822-0121-36	Metalized grommet (comes in pair)
4.Plastic insert, Large			
4	1	6838-0108-32	Metalized
5.Cable clamp, large			
5	1	6830-0107-01	
6.Screw			
6	2	6855-0109-01	Selftapping screw

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE
IN MILLIMETERS

TOLERANCES UNLESS OTHERWISE SPECIFIED:
LINEAR: 0 ± 0.20
0.0 ± 0.15
0.00 ± 0.10
ANGULAR: ± 0.5°

SCALE: 1:1 SHEET 1 OF 1



encitech
A PART OF BEIJERTECH

Drawn by:	IMU
Date:	2023-09-06
Approved by	MRR
Approved date	2023-11-06
TITLE: DPPK-M-15 - METALIZED PLASTIC COVER	
DWG NO. 6688-9506	
See P/N above	
A3	