


This drawing must not without our, permission be copied, im-
parted to a third party or otherwise used without authorisa-
tion. Contravention will be prosecuted.

Denna ritning är vår egendom och skyddas enligt gällande lag
samt får ej utan vårt medgivande kopieras, delgivas annan eller
obehörigen användas.

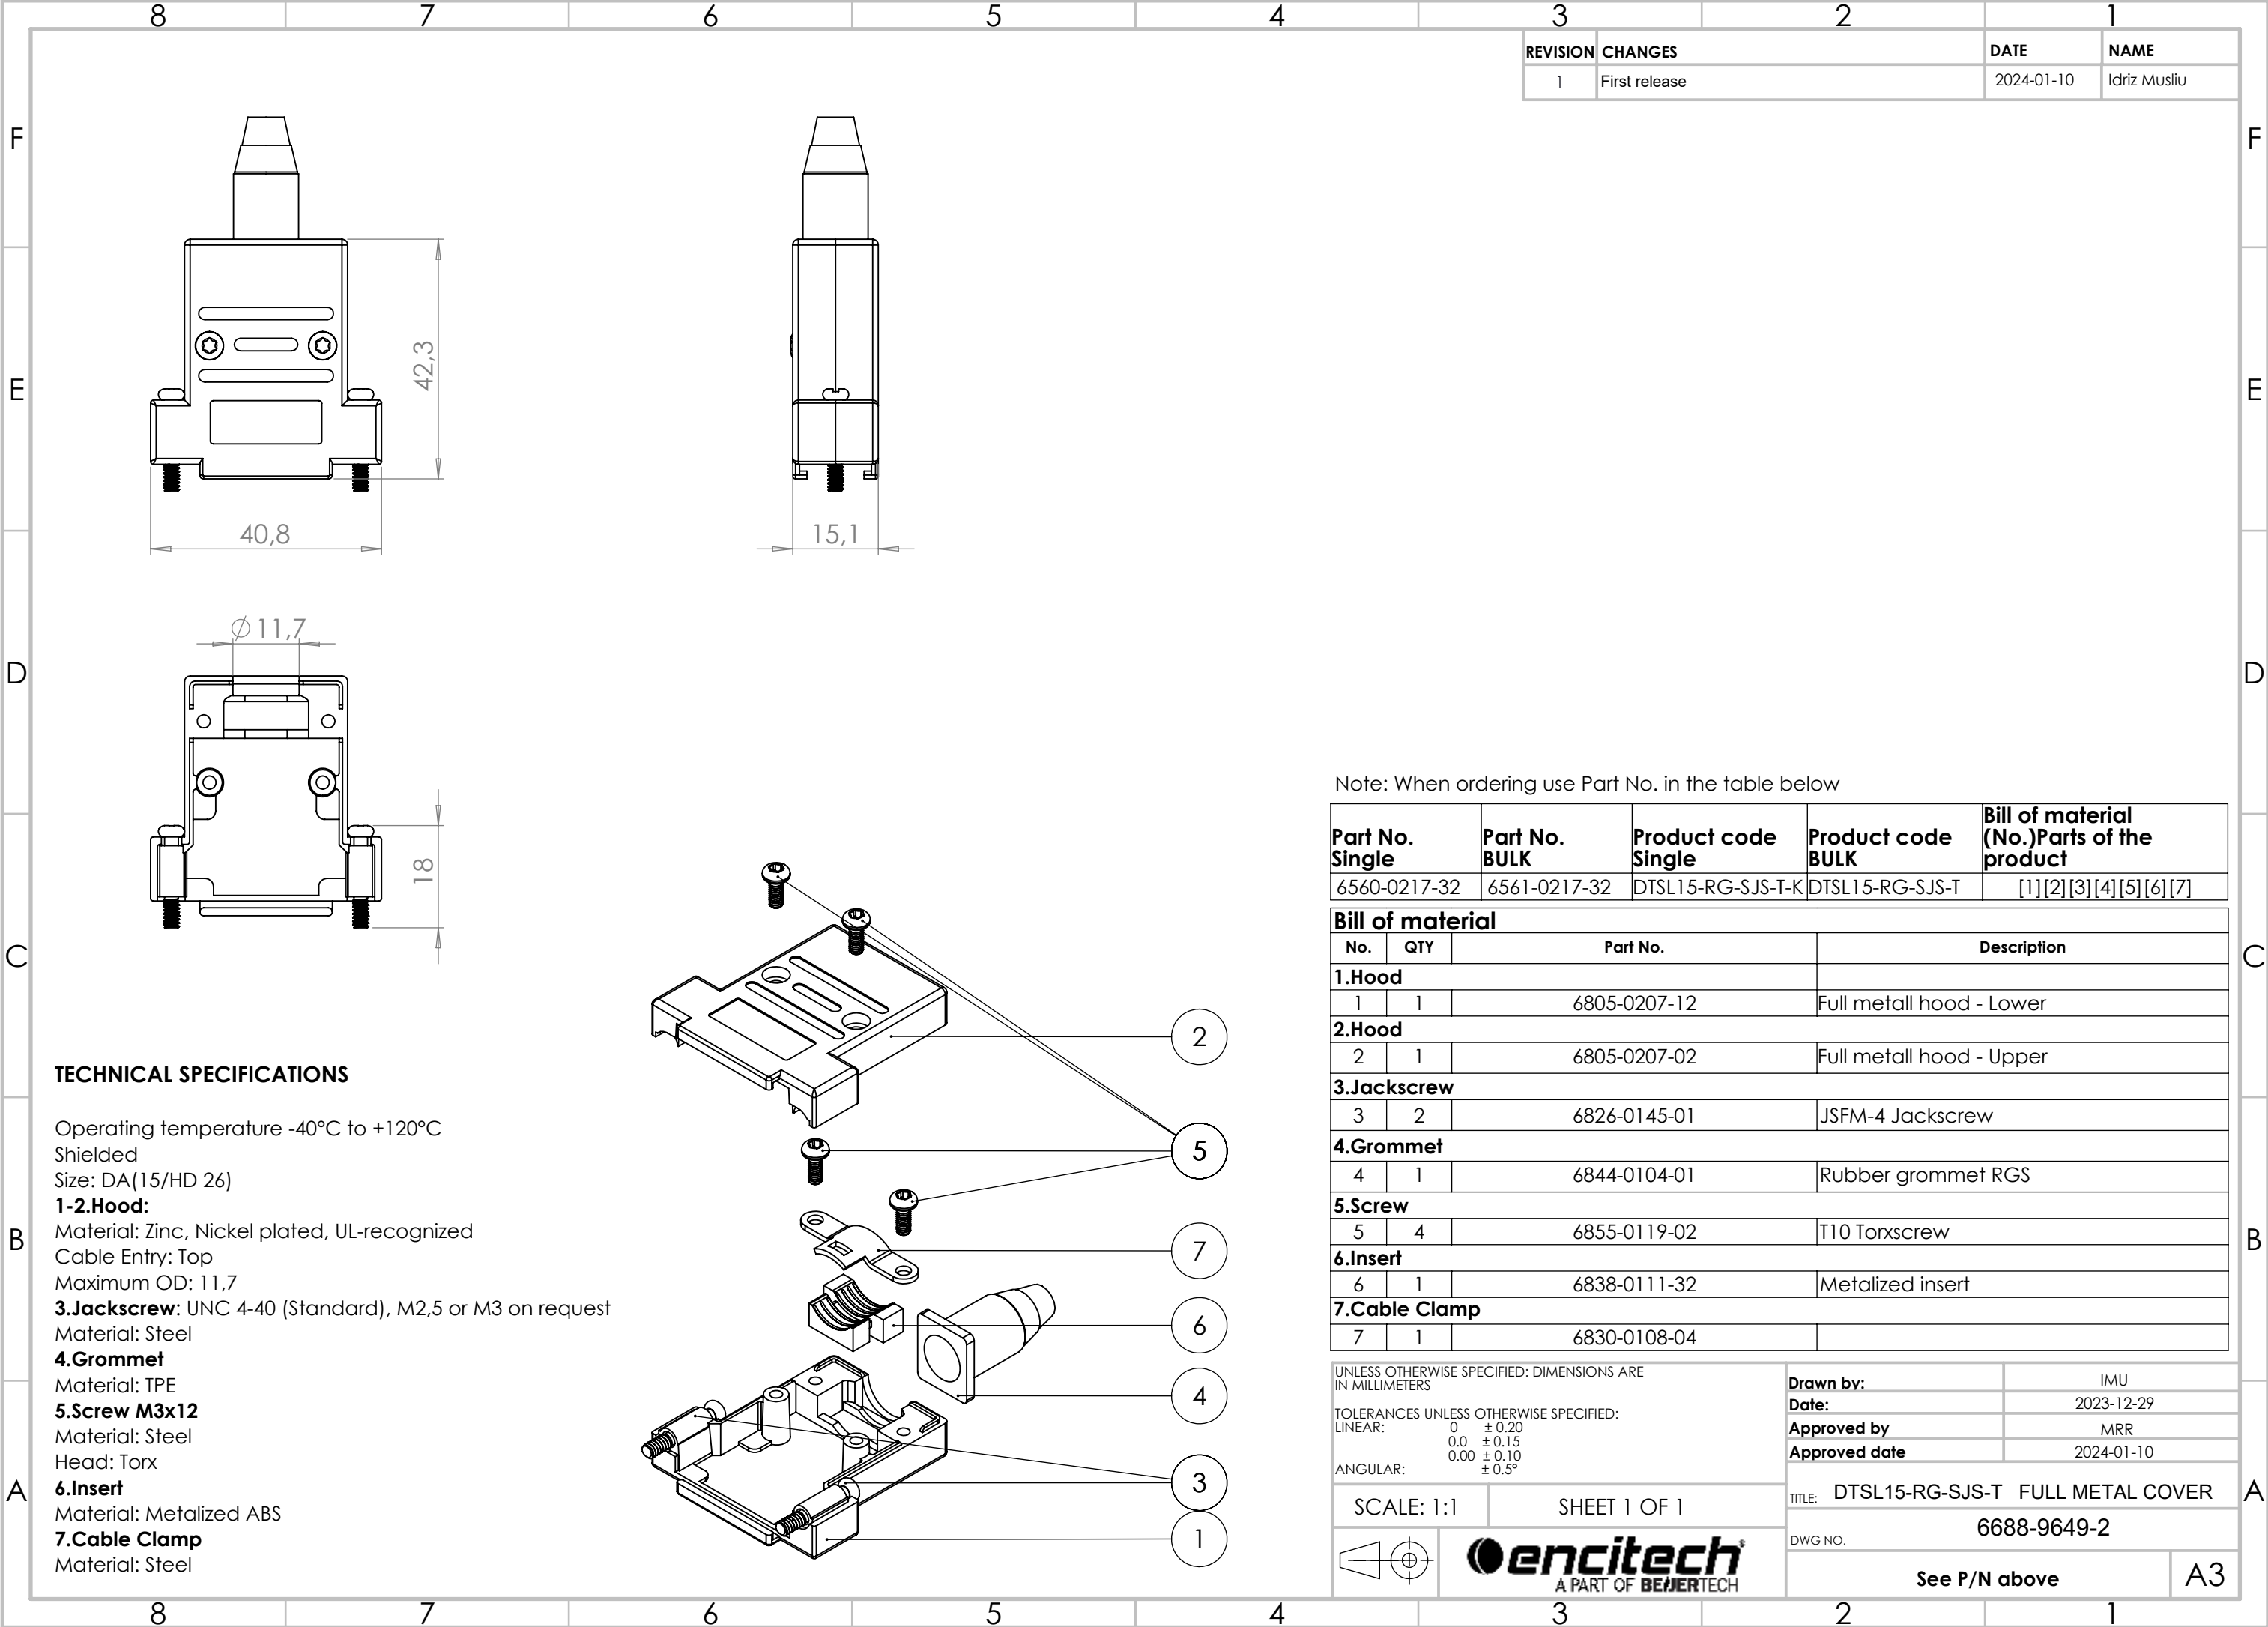

TECHNICAL SPECIFICATIONS

Operating temperature -40°C to +120°C
Shielded
Size: DA(15/HD 26)
1-2.Hood:
Material: Zinc, Nickel plated, UL-recognized
Cable Entry: Top
Maximum OD: 11,7
3.Jackscrew: UNC 4-40 (Standard), M2,5 or M3 on request
Material: Steel
4.Grommet
Material: TPE
5.Screw M3x12
Material: Steel
Head: Torx
6.Insert
Material: Metalized ABS
7.Cable Clamp
Material: Steel

Note: When ordering use Part No. in the table below


Part No. Single	Part No. BULK	Product code Single	Product code BULK	Bill of material (No.)Parts of the product
6560-0217-32	6561-0217-32	DTSL15-RG-SJS-T-K	DTSL15-RG-SJS-T	[1][2][3][4][5][6][7]

Bill of material				
No.	QTY	Part No.	Description	
1.Hood				
1	1	6805-0207-12	Full metall hood - Lower	
2.Hood				
2	1	6805-0207-02	Full metall hood - Upper	
3.Jackscrew				
3	2	6826-0145-01	JSFM-4 Jackscrew	
4.Grommet				
4	1	6844-0104-01	Rubber grommet RGS	
5.Screw				
5	4	6855-0119-02	T10 Torxscrew	
6.Insert				
6	1	6838-0111-32	Metalized insert	
7.Cable Clamp				
7	1	6830-0108-04		

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE
IN MILLIMETERS

TOLERANCES UNLESS OTHERWISE SPECIFIED:
LINEAR: 0 ±0.20
0.0 ±0.15
0.00 ±0.10
ANGULAR: ±0.5°

SCALE: 1:1 SHEET 1 OF 1



encitech
A PART OF BEIJERTECH

Drawn by:	IMU
Date:	2023-12-29
Approved by	MRR
Approved date	2024-01-10
TITLE: DTSL15-RG-SJS-T FULL METAL COVER	
6688-9649-2	
DWG NO.	
See P/N above	A3