


No.	Changes and/or Note No.	Date	Sign	No.	Changes and/or Note No.	Date	Sign


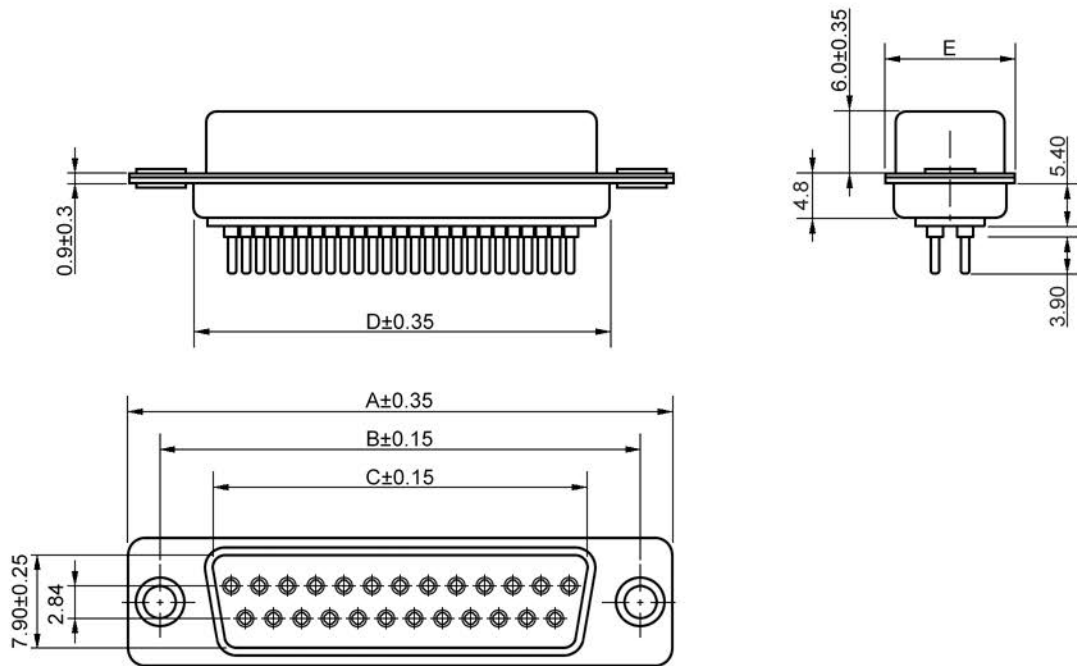


UNIT: (mm)

DIMENSIONS

Size:	A	B	C	D	E	Part No:
09P	30.80	24.99	16.30	19.20	12.60	2103-0100-11
15P	39.15	33.32	24.65	27.70	12.60	2103-0100-12
25P	53.00	47.04	38.40	41.10	12.60	2103-0100-13
37P	69.30	63.50	54.80	57.30	12.60	2103-0100-14
50P	67.00	61.00	52.20	-	15.30	2103-0100-15

PCB BOARD LAYOUT

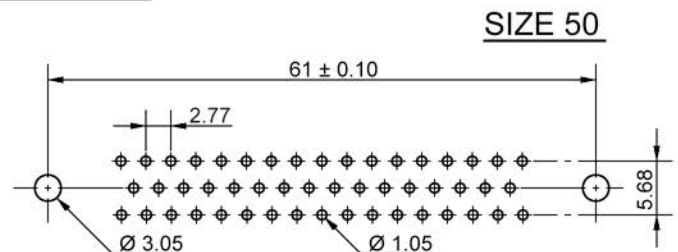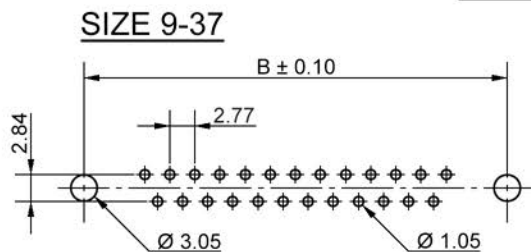

MATERIAL SPECIFICATIONS:

Shell: Steel, Tin Plated (Standard)
Zinc Plate on request
Insulator: Glass Filled PBT, UL 94 V-0
Contacts: Brass, Stamped Pins
Gold over Nickel

TECHNICAL SPECIFICATIONS:

Current Rating: 5 Amp
Contact Resistance: 15 mΩ Max.
Insulator Resistance: 1000 MΩ Min.
Test Voltage: 500V AC for 1 Minute
Operating Temperature: -55°C to +105°C

DATE 2011-06-15	DRAWN MRR	SCALE	MATERIAL TYPE	
	APPROVED		REPLACES	
			DDxx-FTBS Sub-D Female Dip Solder Connector	
			DRAWING No.	2103-0100-1x