





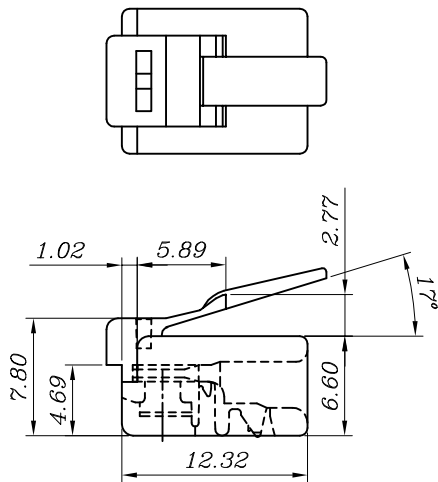

THIS IS A RoHS
COMPLIANT
COMPONENT/
PRODUCT.

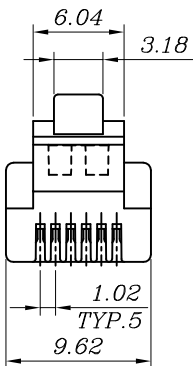

SPECIFICATIONS

1. ELECTRICAL:

UL APPLICATIONS: 250VAC MAX. AT 2 AMPS
DIELECTRIC WITHSTANDING VOLTAGE: 1000VAC. 60 SEC.
INSULATION RESISTANCE: 500 MEGA OHM
CONTACT RESISTANCE: 20 MILLI OHM

2. MECHANICAL:

STRAIN RELIEF: 20 POUND MIN.
DURABILITY: 1200 MATING CYCLES

3. MATERIAL:

HOUSING: POLYCARBONATE UL94 V-0
COLOR: TRANSPARENT
CONTACT BLADE: COPPER ALLOY
GOLD PLATING: 50U"

4. USAGE

SUITABLE FOR STRANDED OR SOLID WIRES AWG23-26
(WIRE OD 0.96 - 1.02 MM)

 X0	0000000	NEW DESIGN		LINGER	071307	
MARK	ECN-NO.	REVISION RECORD		DRAWN		DATE
		UNLESS OTHERWISE SPECIFIED TOLERANCE		SCALE		CHECKED
		Dimension Range Tolerance		UNIT		APPROVED
		X.X	±0.20	mm		 SHEET 1/1
		X.XX	±0.15	SIZE		
		X.XXX	±0.10	A3		
		ANGLE	±5°			
Material/Plated/Notes		NAME				
SEE NOTE		RJ12-6P6C-R 6P6C MODULAR PLUG				
Tooling No.		Part No 6510-0104-04				Rev.
		DOC. NO.				

Design drawing