


No.	Changes and/or Note No.	Date	Intr.	No.	Changes and/or Note No.	Date	Intr.

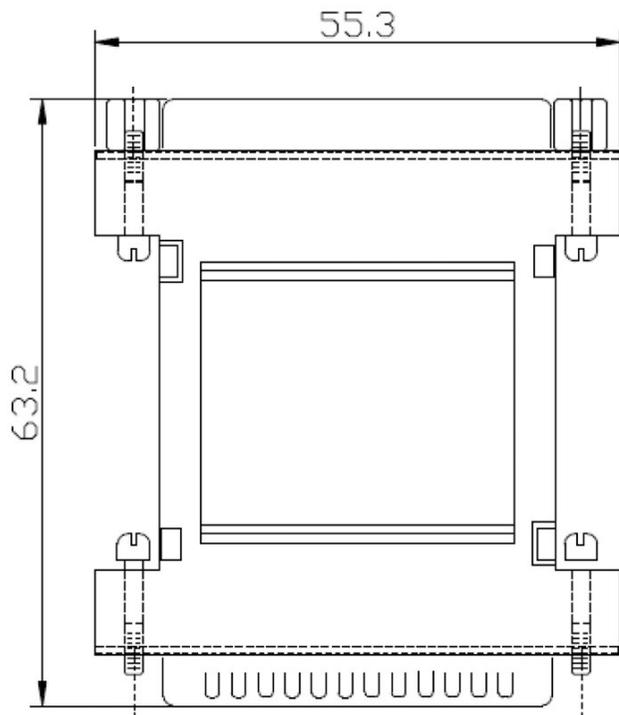


SPECIFICATION

MATERIAL
 WIRE :PVC WIRE COMPOUND UL1007
 Insulator: P.B.T & Glass fill reinforced UL94V-0
 Contacts: Brass(standard);Phosphor Bronze(choose)
 Shell: **ABS UL94HB**
 Rivet,Boardlock: Brass
CONTACT PLATING
 Underplate: 50m" Nickel
 Contact area: 1m" Selective Gold
ELECTRICAL CHARACTERISTICS
 Operation voltage: 250 VAC max.
 Current rating: 3 Amps max.
 Contact resistance: 15 mohms max.
 Insulation resistance: 3000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC / minute
 Operating temperature: -55°C TO +105°C

WIRE SPECIFICATION COUNT		
BLACK	M-F	3
BROWN	M-F	3
RED	M-F	3
ORANGE	M-F	3
YELLOW	M-F	3
GREEN	M-F	2
BLUE	M-F	2
VIOLET	M-F	2
GRAY	M-F	2
WHITE	M-F	2

PARTS OPTION

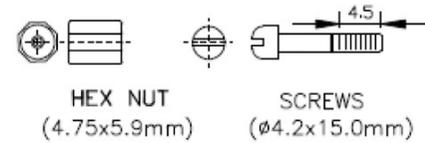

DATE	DRAWN	SCALE	MATERIAL TYPE	
	APPROVED		REPLACES	
			25-way Male to 25-way Female GA-2525-MF-LG-K	

