


This drawing must not without our, permission be copied, im-
parted to a third party or otherwise used without authorisa-
tion. Contravention will be prosecuted.

Denna ritning är vår egendom och skyddas enligt gällande lag
samt får ej utan vårt medgivande kopieras, delgivas annan eller
obehörigen användas.

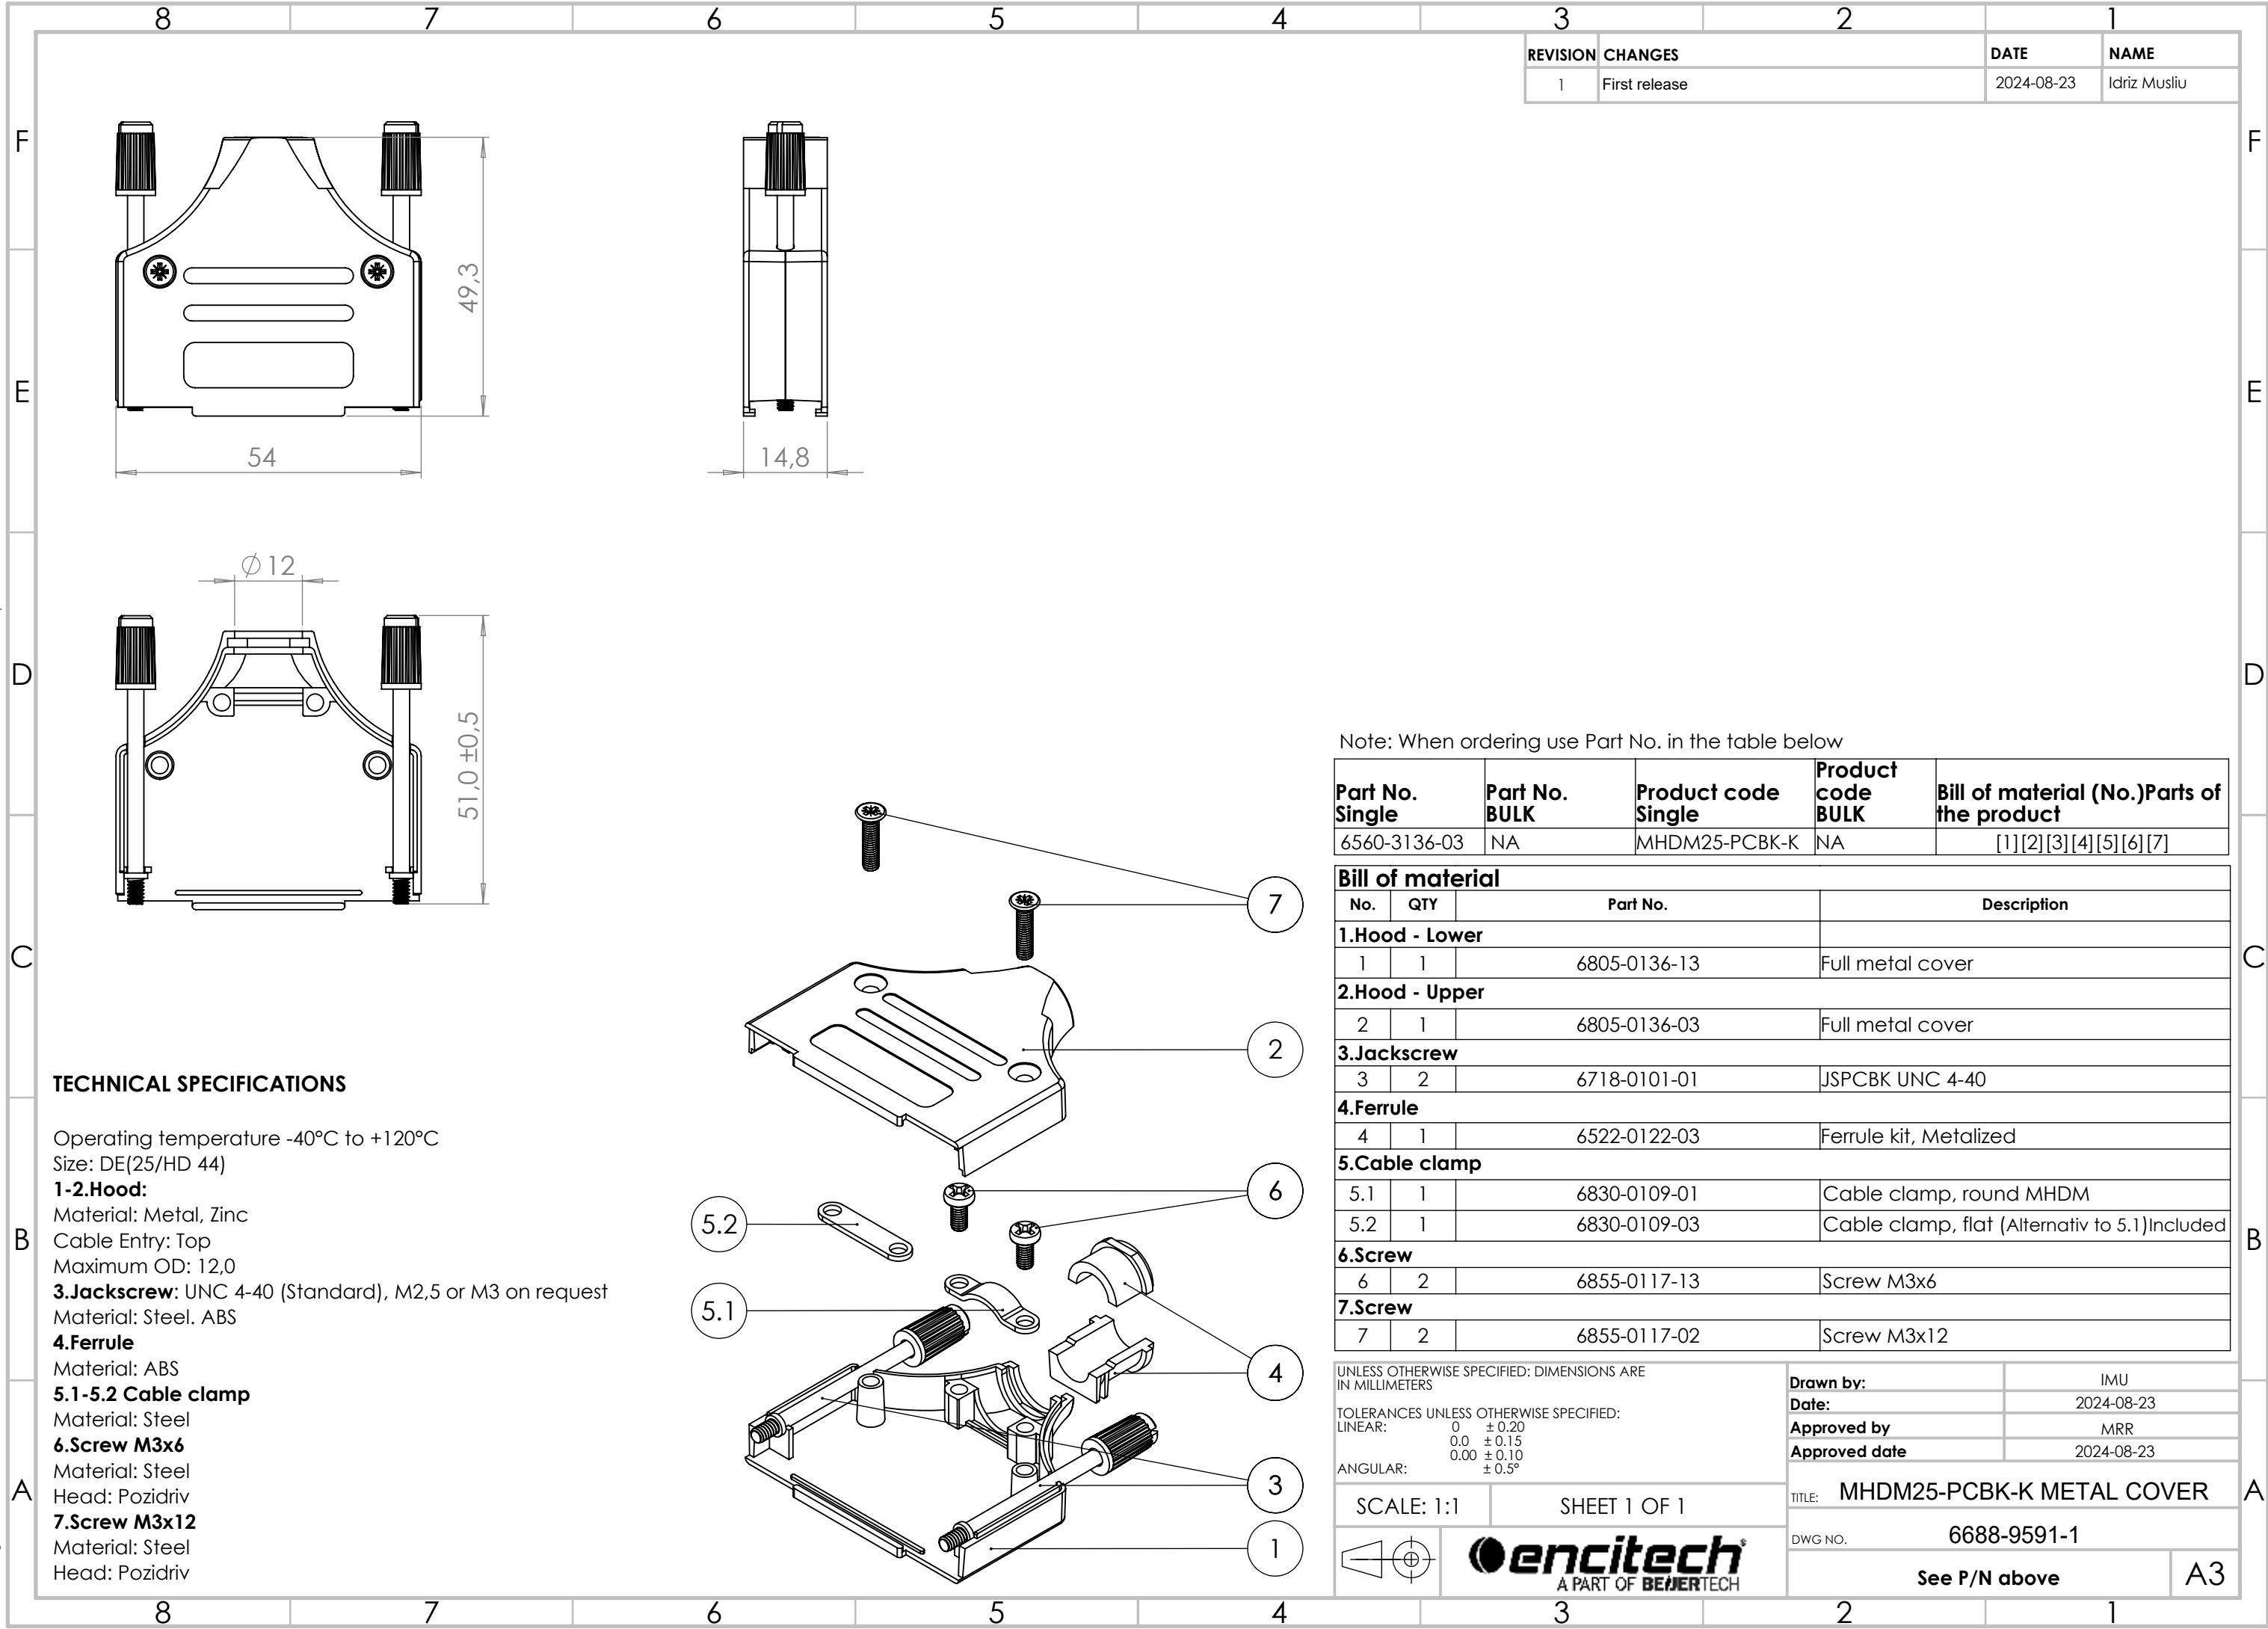

TECHNICAL SPECIFICATIONS

Operating temperature -40°C to +120°C
Size: DE(25/HD 44)

1-2.Hood:

Material: Metal, Zinc
Cable Entry: Top
Maximum OD: 12,0

3.Jackscrew: UNC 4-40 (Standard), M2,5 or M3 on request
Material: Steel. ABS

4.Ferrule

Material: ABS

5.1-5.2 Cable clamp

Material: Steel

6.Screw M3x6

Material: Steel

Head: Pozidriv

7.Screw M3x12

Material: Steel

Head: Pozidriv

Note: When ordering use Part No. in the table below

Part No. Single	Part No. BULK	Product code Single	Product code BULK	Bill of material (No.)Parts of the product
6560-3136-03	NA	MHDM25-PCBK-K	NA	[1][2][3][4][5][6][7]

Bill of material			
No.	QTY	Part No.	Description
1.Hood - Lower			
1	1	6805-0136-13	Full metal cover
2.Hood - Upper			
2	1	6805-0136-03	Full metal cover
3.Jackscrew			
3	2	6718-0101-01	JSPCBK UNC 4-40
4.Ferrule			
4	1	6522-0122-03	Ferrule kit, Metalized
5.Cable clamp			
5.1	1	6830-0109-01	Cable clamp, round MHDM
5.2	1	6830-0109-03	Cable clamp, flat (Alternativ to 5.1)Included
6.Screw			
6	2	6855-0117-13	Screw M3x6
7.Screw			
7	2	6855-0117-02	Screw M3x12


UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE
IN MILLIMETERS

TOLERANCES UNLESS OTHERWISE SPECIFIED:

LINEAR:
0 ± 0.20
0.0 ± 0.15
0.00 ± 0.10
ANGULAR:
± 0.5°

SCALE: 1:1

SHEET 1 OF 1



encitech
A PART OF BEIJERTECH

Drawn by:	IMU
Date:	2024-08-23
Approved by	MRR
Approved date	2024-08-23
TITLE: MHDM25-PCBK-K METAL COVER	
DWG NO.	6688-9591-1
See P/N above	

A3