
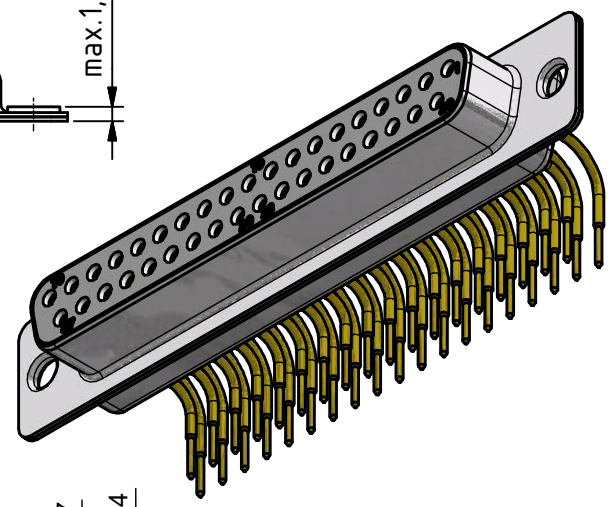
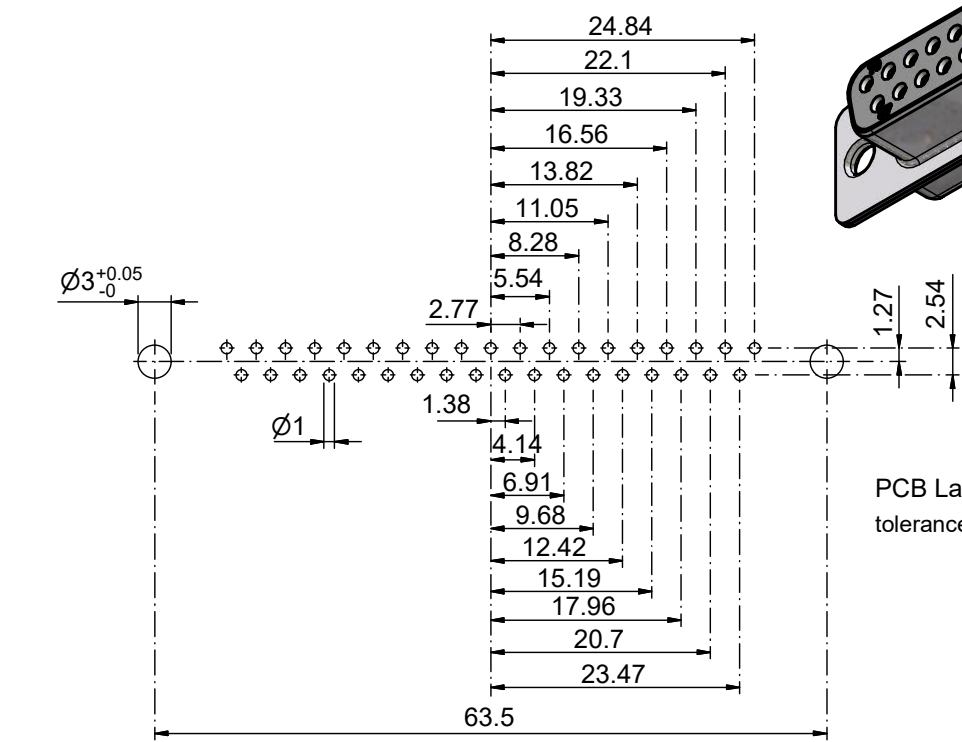
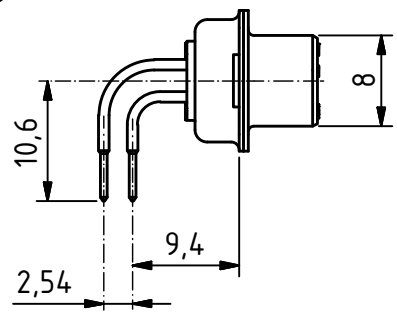


RoHS compliant

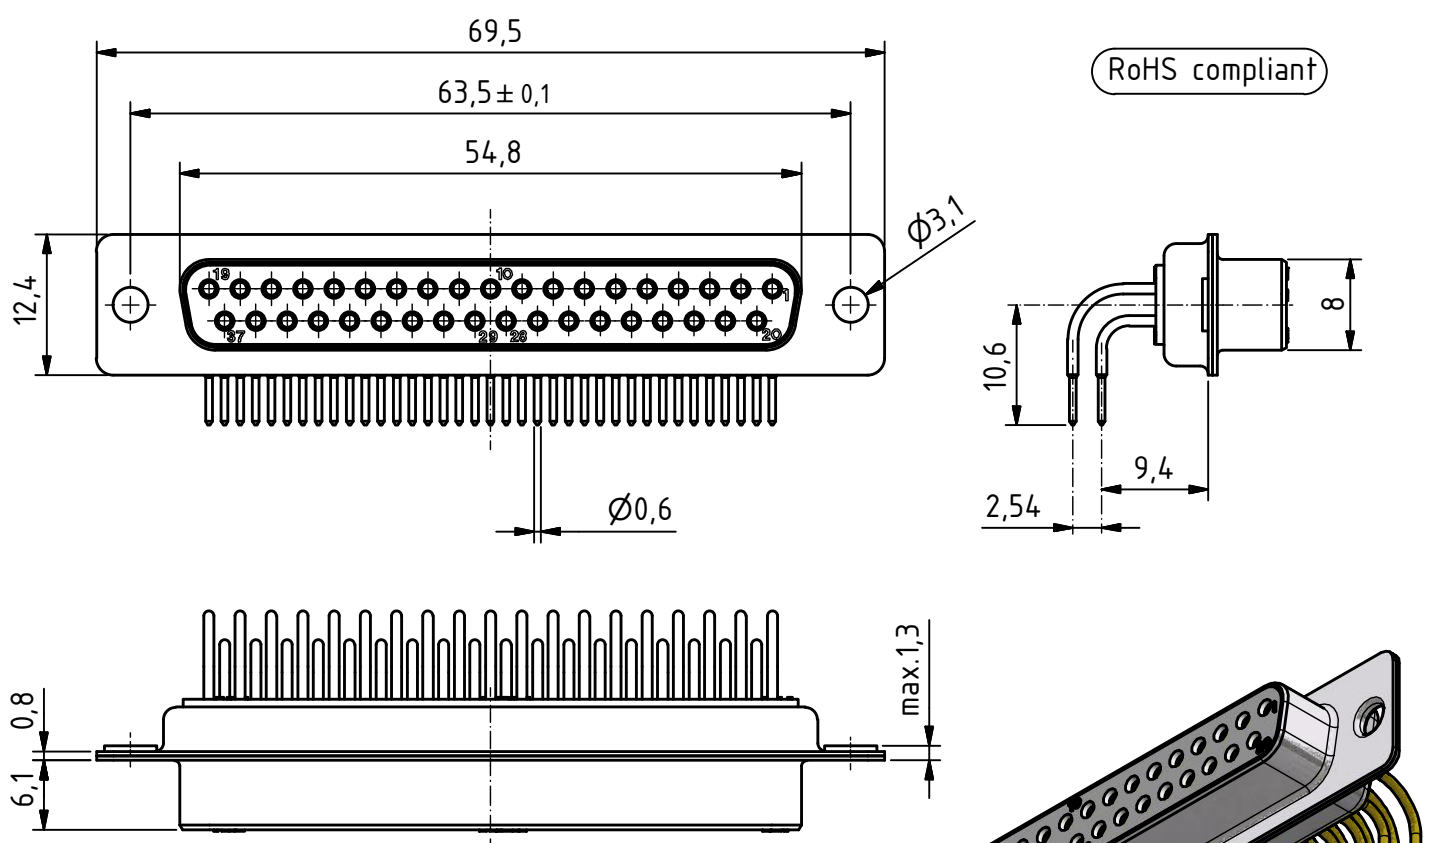

PCB Layout
tolerances +/-0.1

Product is
suitable for
Wave Solder
Process

General tolerances (Deltron standard)	size in mm			
	> 0.5	> 3	> 6	> 30
	up to 3	up to 6	up to 30	up to 120
	tolerances	±0.1	±0.2	±0.3

MATERIALS

- Insulator: Thermoplastic UL 94-V-0 white
- Contact: Machined / Copper alloy
- Contact finish: Quality class 2
- Shell: steel - zinc blue chromated

CHARAKTERISTICS

- Working voltage: 125V
- Current rating: 7.5A
- Contact resistance: max. 10mΩ - DIN41652
- Insulation resistance: >5GΩ
- Temperature range: -55° to +125°C

	All dimensions in mm	Rev.	Rev.	Rev.	DE002136		
		Rev.	Rev.	Rev.	part no.		
DT37SYC/2				1.5:1	drawn	14.01.2019	rop
				scale	checked		
					approved		
				Industrie Neuhof 8c CH-3422 Kirchberg www.d-sub.swiss		K063360 drawing no.	