


No.	Changes and/or Note No.	Date	Sign	No.	Changes and/or Note No.	Date	Sign

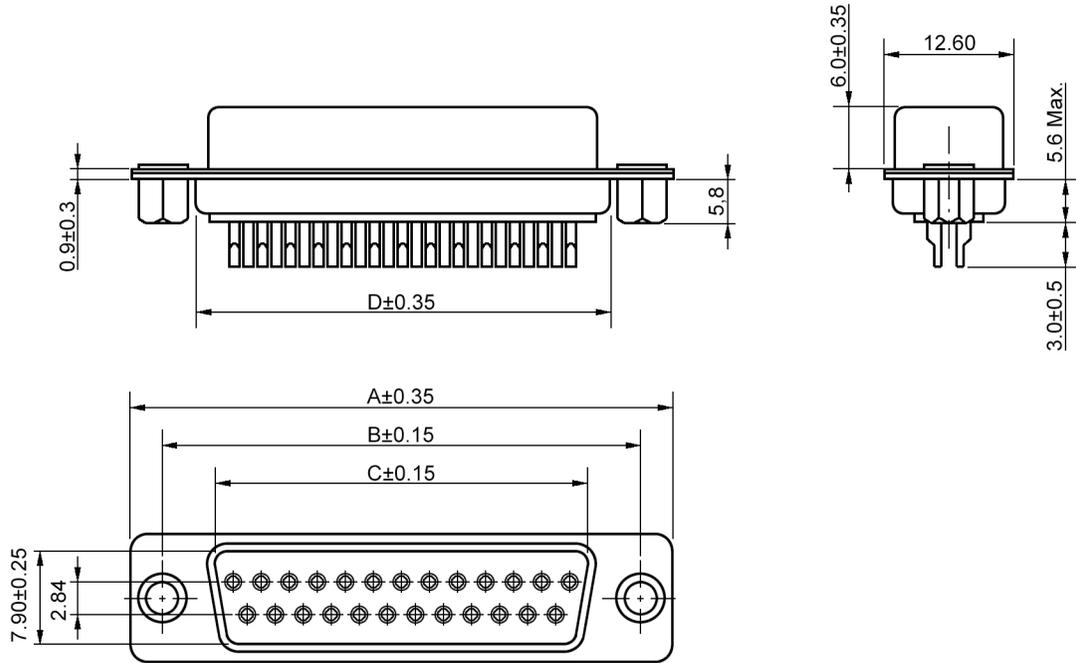

UNIT: (mm)

### DIMENSIONS

Size:	A	B	C	D	Part No:
09P	30.80	24.99	16.30	19.20	2101-0201-11
15P	39.15	33.32	24.65	27.70	2101-0201-12
25P	53.00	47.04	38.40	41.10	2101-0201-13
37P	69.30	63.50	54.80	57.30	2101-0201-14

### MATERIAL SPECIFICATIONS:

Shell: Steel, Tin or Ni Plated  
 Insulator: Glass Filled PBT, UL 94 V-0  
 Contacts: Brass, Machined Pins  
 Gold over Nickel  
 Rivet: Copper-Alloy, Ni Plated

### TECHNICAL SPECIFICATIONS:

Current Rating: 5 Amp  
 Contact Resistance: 15 mΩ Max.  
 Insulator Resistance: 1000 MΩ Min.  
 Test Voltage: 500V AC for 1 Minute  
 Operating Temperature: -55°C to +105°C  
 Recommended AWG: 24-28

DATE 2011-06-13	DRAWN MRR	SCALE	MATERIAL TYPE
	APPROVED		REPLACES
<b>DMxxS - K</b> Sub-D Female with Back-Nut "Option K"			DRAWING No. <b>2101-0201-1X</b>