




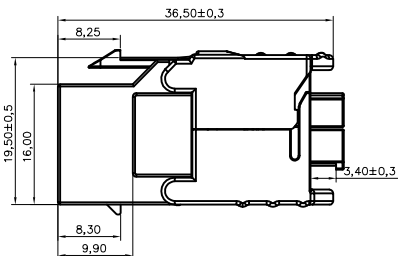


RoHS

THIS IS A RoHS
COMPLIANT
COMPONENT/
PRODUCT.

NOTES:

ELECTRICAL:

1. VOLTAGE RATING 125 VAC RMS.
2. CURRENT RATING: 1.5 AMP.
3. CONTACT RESISTANCE 100 MILLIOHMS MAX.
4. INSULATION RESISTANCE 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH: 750 VAC RMS 60Hz,1MIN.
6. PERFORMANCE: CONFORM TO ANSI/TIA-568.2-D

ENVIRONMENTAL:

1. STORAGE: -40°C TO +85°C.
2. OPERATION: -40°C TO +85°C.

MECHANICAL:

1. HOUSING MATERIAL: UL94V-0
2. INSERT MATERIAL: UL94V-0
3. PCB MATERIAL: FR-4
4. CONTACT MATERIAL: PHOSPHOR BRONZE
5. IDC CONTACT MATERIAL: PHOSPHOR BRONZE
6. WIRE: #22~24AWG

X1		CHANGE LOGO	LONNY	022323'
X2		ADD P/N	LONNY	021523'
X1		ADD P/N	LONNY	091821'
X1		ADD P/N	LONNY	121620'
X0	00099000	NEW DESIGN	Patrick	113020'

MARK	ECN-NO.	REVISION RECORD		DRAWN	DATE
		UNLESS OTHERWISE SPECIFIED TOLERANCE		SCALE	CHECKED
		Dimension Range	Tolerance	2/1	
		X.X	±0.20	UNIT	APPROVED
		X.XX	±0.15	mm	
		X.XXX	±0.10	SIZE	
		ANGLE	±5°	A3	
Material/Plated/Notes		NAME			
SEE NOTE		C8 Slim Type Keystone Jack			
Tooling No.		PART NO.		REV.	
		R.JJS-88-C8-01		E	
		DOC. NO.			

Design drawing