


No.	Changes and/or Note No.	Date	Sign	No.	Changes and/or Note No.	Date	Sign
1	Pin type and Electrical values	161129	MRR				

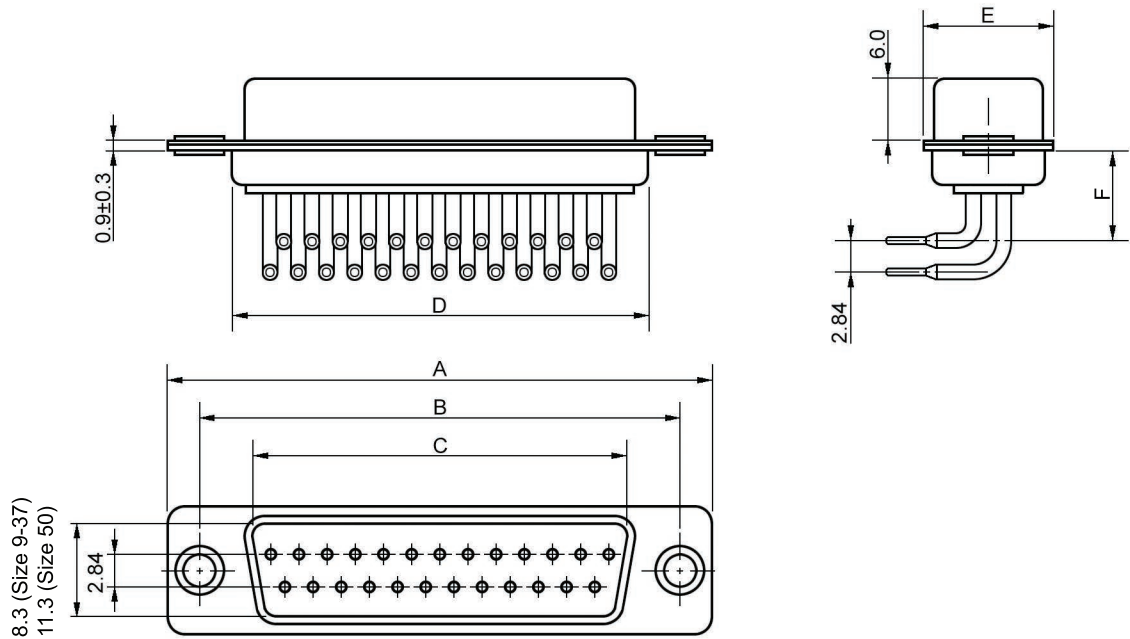


UNIT: (mm)

DIMENSIONS

Size:	A	B	C	D	E	F	Part No:
09P	30.81	24.99	16.92	19.23	12.50	9.4	2103-2200-01
15P	39.14	33.32	25.25	27.56	12.50	9.4	2103-2200-02
25P	53.04	47.04	38.96	41.30	12.50	9.4	2103-2200-03
37P	69.32	63.50	55.42	57.30	12.50	9.4	2103-2200-04
50P	66.92	61.11	52.86	55.30	15.30	9.4	2103-2200-05

PCB BOARD LAYOUT

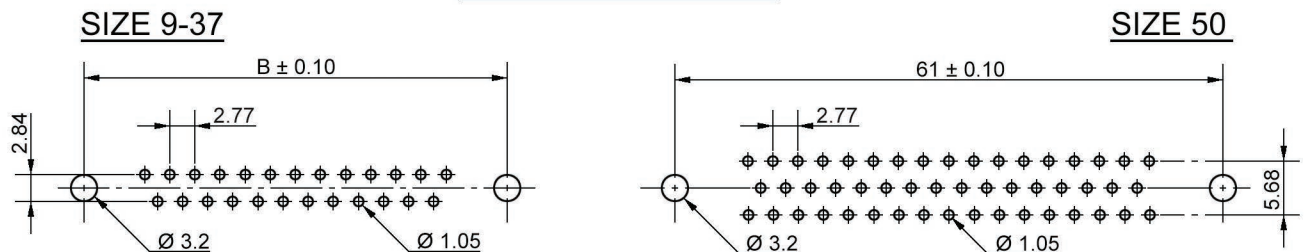

MATERIAL SPECIFICATIONS:

Shell: Steel, Tin Plated (Standard)
Nickel Plate on request
Insulator: Glass Filled PBT, UL 94 V-0
Contacts: Brass, Machined Pins
Gold over Nickel

TECHNICAL SPECIFICATIONS:

Current Rating: 3 Amp
Contact Resistance: 10 mΩ Max.
Insulator Resistance: 1000 MΩ Min.
Test Voltage: 1000V AC for 1 Minute
Operating Temperature: -55°C to +105°C

DATE 2012-05-03	DRAWN MRR	SCALE	MATERIAL TYPE	
	APPROVED		REPLACES	
			DDxx-MTBG-RBM Sub-D Male Dip Solder Connector Angled, 9.4mm footprint	
			DRAWING No.	2103-2200-0x