


This drawing must not without our, permission be copied, im-
parted to a third party or otherwise used without authorisa-
tion. Contravention will be prosecuted.

Denna ritning är vår egendom och skyddas enligt gällande lag
samt får ej utan vårt medgivande kopieras, delgivas annan eller
obehörigen användas.

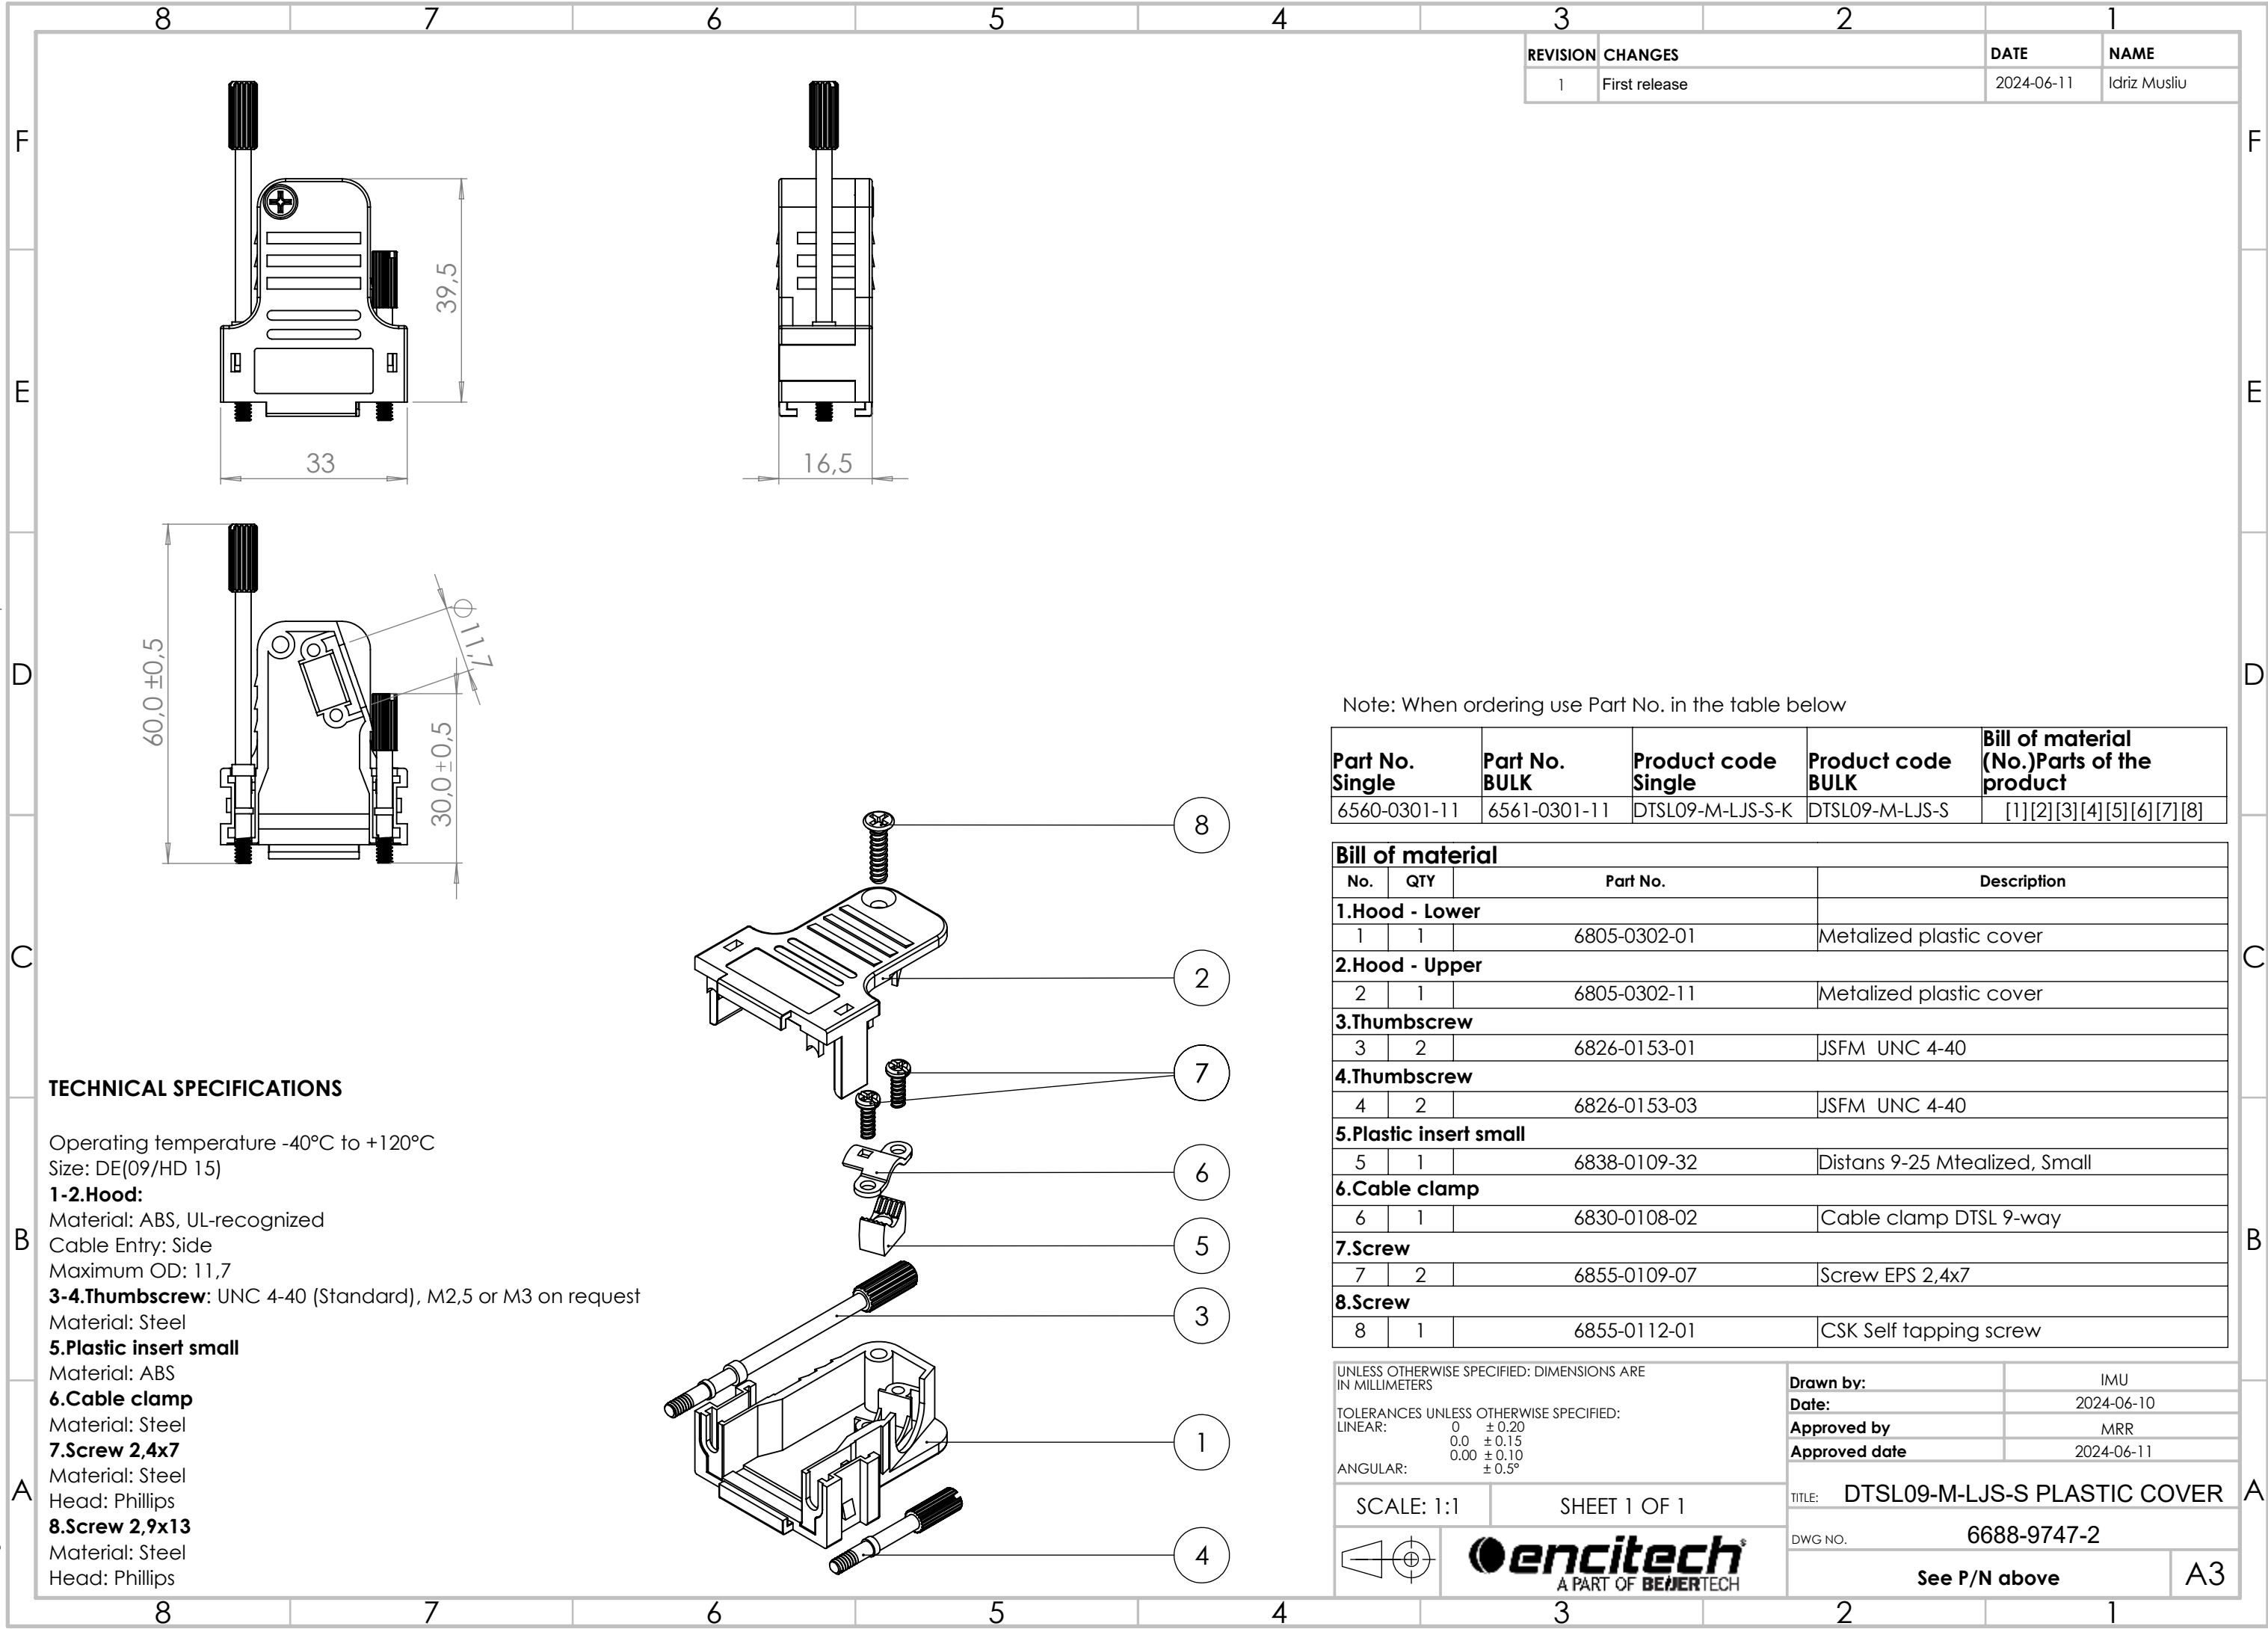

TECHNICAL SPECIFICATIONS

Operating temperature -40°C to +120°C
Size: DE(09/HD 15)
1-2.Hood:
Material: ABS, UL-recognized
Cable Entry: Side
Maximum OD: 11,7
3-4.Thumbscrew: UNC 4-40 (Standard), M2,5 or M3 on request
Material: Steel
5.Plastic insert small
Material: ABS
6.Cable clamp
Material: Steel
7.Screw 2,4x7
Material: Steel
Head: Phillips
8.Screw 2,9x13
Material: Steel
Head: Phillips

REVISION	CHANGES	DATE	NAME
1	First release	2024-06-11	Idriz Musliu

Note: When ordering use Part No. in the table below

Part No. Single	Part No. BULK	Product code Single	Product code BULK	Bill of material (No.)Parts of the product
6560-0301-11	6561-0301-11	DTSL09-M-LJS-S-K	DTSL09-M-LJS-S	[1][2][3][4][5][6][7][8]

Bill of material				
No.	QTY	Part No.	Description	
1.Hood - Lower				
1	1	6805-0302-01	Metalized plastic cover	
2.Hood - Upper				
2	1	6805-0302-11	Metalized plastic cover	
3.Thumbscrew				
3	2	6826-0153-01	JSFM UNC 4-40	
4.Thumbscrew				
4	2	6826-0153-03	JSFM UNC 4-40	
5.Plastic insert small				
5	1	6838-0109-32	Distans 9-25 Mtealized, Small	
6.Cable clamp				
6	1	6830-0108-02	Cable clamp DTSL 9-way	
7.Screw				
7	2	6855-0109-07	Screw EPS 2,4x7	
8.Screw				
8	1	6855-0112-01	CSK Self tapping screw	

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS		Drawn by:	IMU
TOLERANCES UNLESS OTHERWISE SPECIFIED: LINEAR: 0 ± 0.20 0.0 ± 0.15 0.00 ± 0.10 ANGULAR: ± 0.5°		Date:	2024-06-10
SCALE: 1:1		Approved by	MRR
SHEET 1 OF 1		Approved date	2024-06-11
TITLE: DTSL09-M-LJS-S PLASTIC COVER		DWG NO. 6688-9747-2	
A PART OF BEIJERTECH		See P/N above	
A3		A3	