
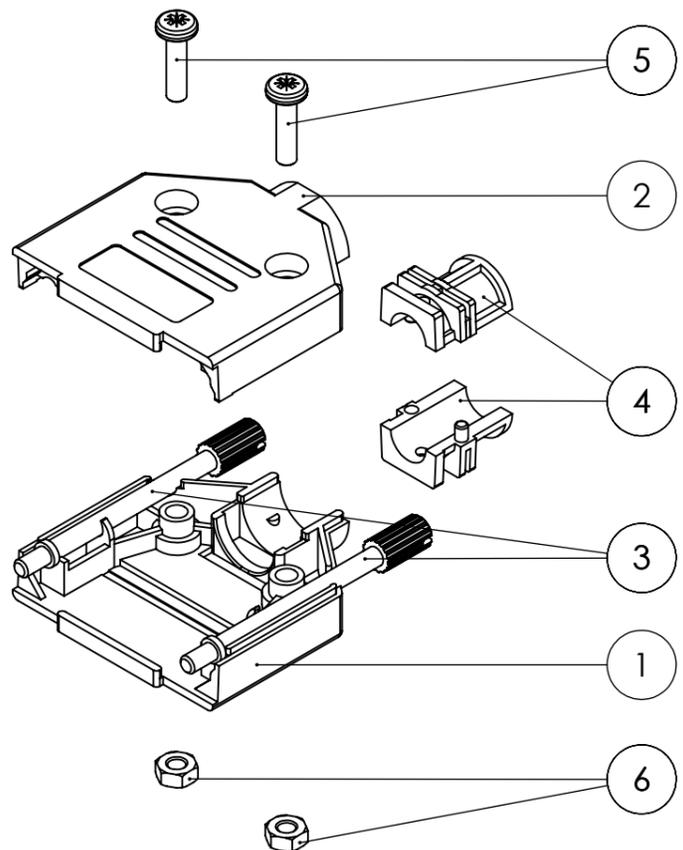
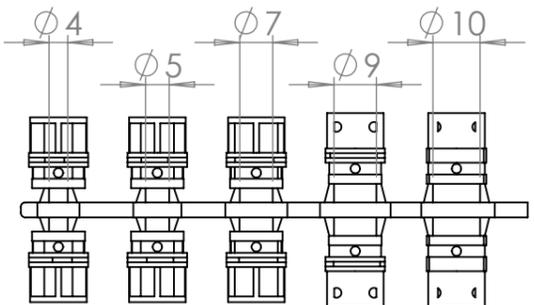
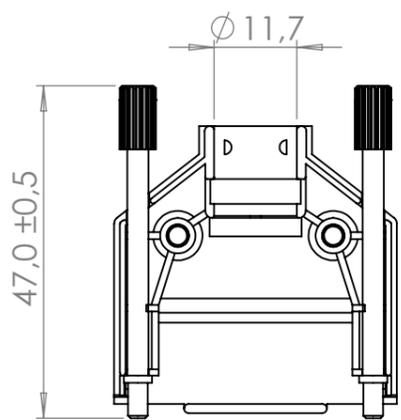
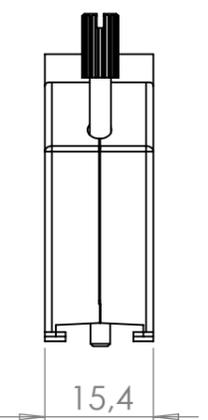


REVISION	CHANGES	DATE	NAME
1	First release	2024-10-04	Idriz Musliu

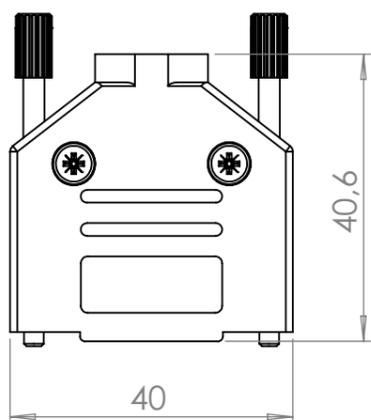

**TECHNICAL SPECIFICATIONS**

Operating temperature -40°C to +120°C  
 Size: DA(15/HD 26)

**1-2.Hood:**

Material: ABS  
 Cable Entry: Top  
 Maximum OD: 11,7

**3.Thumbscrew:** UNC 4-40 (Standard), M2,5 or M3 on request

Material: Steel

**4.Grommet kit, 5 set**

Material: ABS

**5.Screw M3x12**

Material: Steel  
 Head: Pozidriv

**6.Nut M3**

Material: Steel

Note: When ordering use Part No. in the table below

Part No. Single	Part No. BULK	Product code Single	Product code BULK	Bill of material (No.)Parts of the product
6560-0108-02	6561-0108-02	DTPK-P-15-BK-K	DTPK-P-15-BK	[1][2][3][4][5][6]


Bill of material			
No.	QTY	Part No.	Description
<b>1.Hood - Lower</b>			
1	1	6805-0101-12	Plastic cover
<b>2.Hood - Upper</b>			
2	1	6805-0101-02	Plastic cover
<b>3.Thumbscrew</b>			
3	2	6826-0142-02	JSFM UNC 4-40 (Black)
<b>4.Grommet</b>			
4	5	6522-0121-05	Black, 5 set
<b>5.Screw</b>			
5	2	6855-0303-11	Screw M3x11.5 Pozidriv
<b>6.Nut</b>			
6	2	6855-0304-11	Nut M3 (Black)

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS

TOLERANCES UNLESS OTHERWISE SPECIFIED:

LINEAR: 0 ± 0.20  
 0.0 ± 0.15  
 0.00 ± 0.10  
 ANGULAR: ± 0.5°

SCALE: 1:1 SHEET 1 OF 1



Drawn by:	IMU
Date:	2024-10-03
Approved by:	MRR
Approved date:	2024-10-04

TITLE:	DTPK-P PLASTIC COVER
DWG NO.:	6688-9582
	See P/N above

A3

This drawing must not without our, permission be copied, im-  
parted to a third party or otherwise used without authorisa-  
tion. Contravention will be prosecuted.

Denna ritning är vår egendom och skyddas enligt gällande lag  
samt får ej utan vårt medgivande kopieras, delgivas annan eller  
obehörigen användas.