
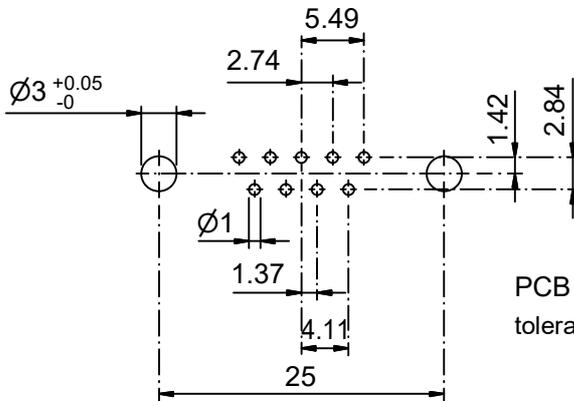

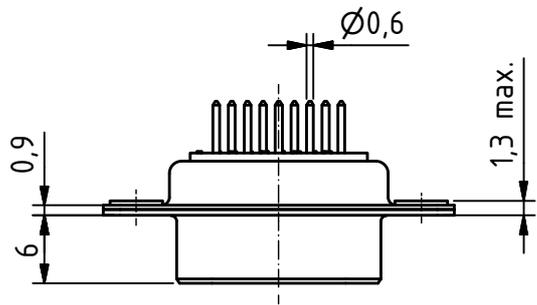



RoHS compliant

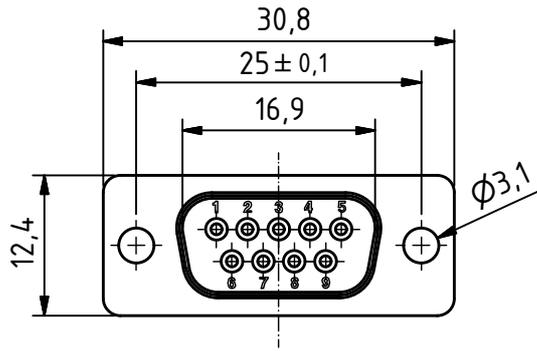

PCB Layout
tolerances +/-0.1

Product is
suitable for
Wave Solder
Process

MATERIALS

- Insulator: Thermoplastic UL 94-V-0 white
- Contact: Machined / Copper alloy
- Contact finish: Quality class 2
- Shell: steel - zinc blue chromated

CHARAKTERISTICS

- Working voltage: 125V
- Current rating: 7.5A
- Contact resistance: max. 10mΩ - DIN41652
- Insulation resistance: >5GΩ
- Temperature range: -55° to +125°C

General tolerances (Deltron standard)	size in mm		tolerances	
	> 0.5	> 3		±0.1
	up to 3	up to 6		±0.2
	up to 30	up to 120		±0.3

	All dimensions in mm	Rev.	Rev.	Rev.	DE001256 part no.		
		Rev.	Rev.	Rev.	drawn	14.01.2019	rop
DT09PY/2				1.5:1 scale	checked		
				Industrie Neuhof 8c CH-3422 Kirchberg www.d-sub.swiss	K063352 drawing no.		