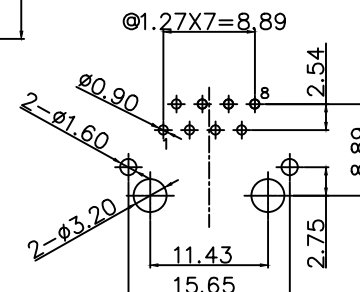
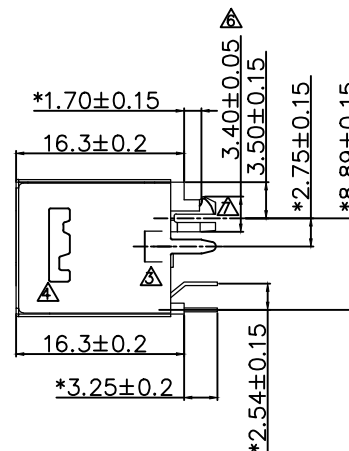







RoHS

THIS IS A RoHS
COMPLIANT
COMPONENT/
PRODUCT.**NOTES:****ELECTRICAL:**

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.
6. LED RATINGS: FORWARD VOLTAGE: 2.2 VOLTS TYPICAL.
REVERSE VOLTAGE: 5 VOLTS MAXIMUM.
7. OPERATING : 750 CYCLES MIN.

MECHANICAL:

1. HOUSING MATERIAL : POLYESTER OR HIGH TEMP.
2. INSERT MATERIAL : POLYESTER OR HIGH TEMP.
3. CONTACT MATERIAL : PHOSPHOR BRONZE 0.35 mm THICKNESS
4. SHELL : BRONZE t=0.25 mm
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
 2. OPERATION: -40°C TO +85°C.
 3. WAVE SOLDERING TEMPERATURE: 255°C~265°C (5~10 SECONDS)
- MATES WITH MODULAR PLUG CONFORMING TO TIA-1096-A.

ORDERING INFORMATION:

PART NUMBER	PRODUCT CODE	CONFIGURATION
325I-0015-01	RJJS-88-A22-EIV	WITHOUT PANEL STOP, 6U" GOLD PLATING
325I-0015-02	RJJS-88-A23-EIV-096	WITH PANEL STOP, 6U" GOLD PLATING
325I-0015-03	RJJS-88-A42-EIV-096	WITHOUT PANEL STOP, 30U" GOLD PLATING
325I-0015-04	RJJS-88-A43-EIV-096	WITH PANEL STOP, 30U" GOLD PLATING

UL
UL RECOGNIZED
FILE #E465899

**PC Board Layout
Component Side Shown**

△ X 6		MODIFY DRAWING	Andy	101923'
△ X 1		MODIFY DRAWING	Andy	090823'
△ X 1		MODIFY DRAWING	Andy	080420'
△ X 2		修改圖面以實物一致	JOY	022119'
△ X 2		MODIFY DRAWING	DORIS	021317'
△ X 2		ADD LOGO "ENCITECH"	DORIS	120816'
△ X 2		ADD NEW P/N.	DORIS	020416'
△ X 0	0069000	NEW DESIGN	DORIS	122115'
MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE

encitech		UNLESS OTHERWISE SPECIFIED TOLERANCE	SCALE	CHECKED	
		Dimension Range Tolerance	2.5/1	APPROVED	
Material/Plated/Notes		X.X ±0.20 UNIT	mm	SHEET 1/1	
SEE NOTE		X.XX ±0.15	mm	REV. 7	
NAME		X.XXX ±0.10	mm	DOC. NO.	
ANGLED		±5°	A3	PART NO.	
Tooling No.		REV.		7	

Design drawing