

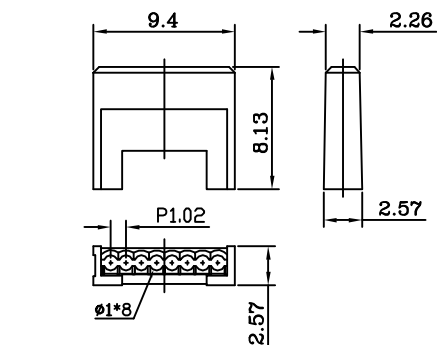
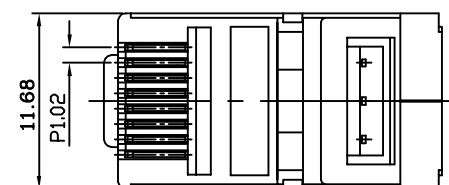
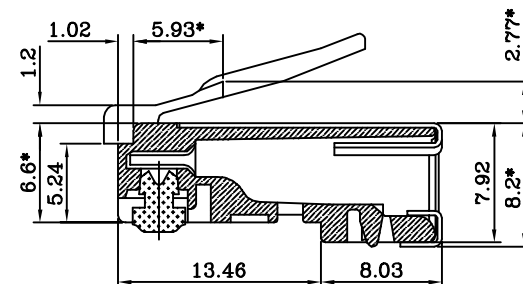
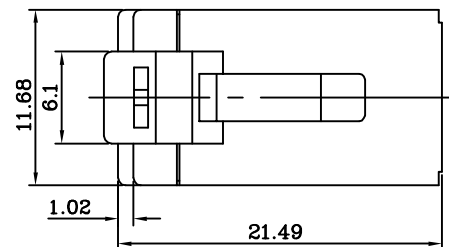


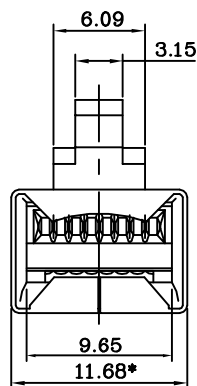

PLUG 8P8C
Insert

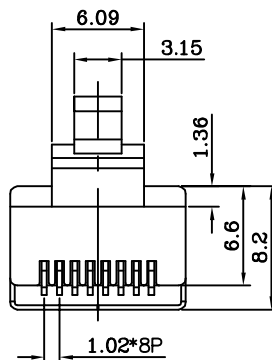

SPECIFICATIONS

I. ELECTRICAL

UL APPLICATIONS 250 VOLTS AC MAX. AT 2 AMPS
DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC
INSULATION RESISTANCE: 100 MEG OHMS MIN.
CONTACT RESISTANCE: 20 MILLIOHMS MAX

2. MECHANICAL

CABLE-TO-PLUG TENSILE STRENGTH: 19.6N PER PCS MIN.
DURABILITY: 200 MATING CYCLES

3. MATERIAL AND FINISH

HOUSING: POLYCARBONATE UL94V-2
COLOR: TRANSPARENT
CONTACT BLADE: PHOSPHOR BRONZE
CONDUCTOR: STRANDED AND SOLID WIRES AWG24, AWG26
GOLD PLATING: 50U"