
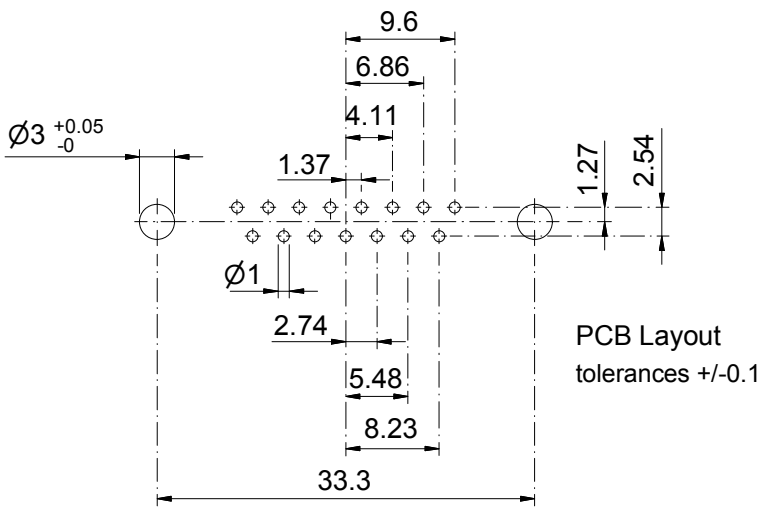
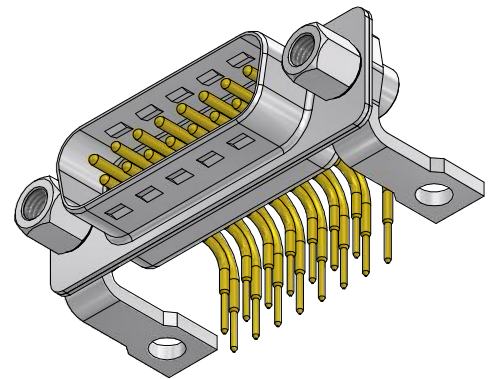
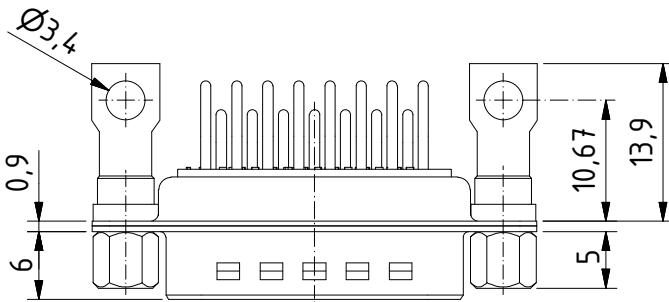
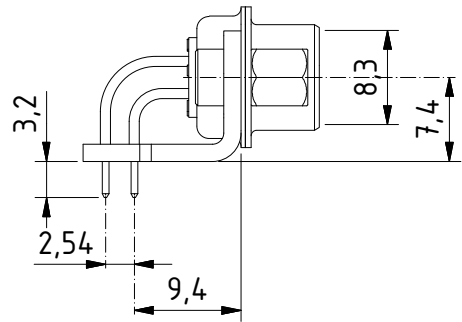


RoHS compliant

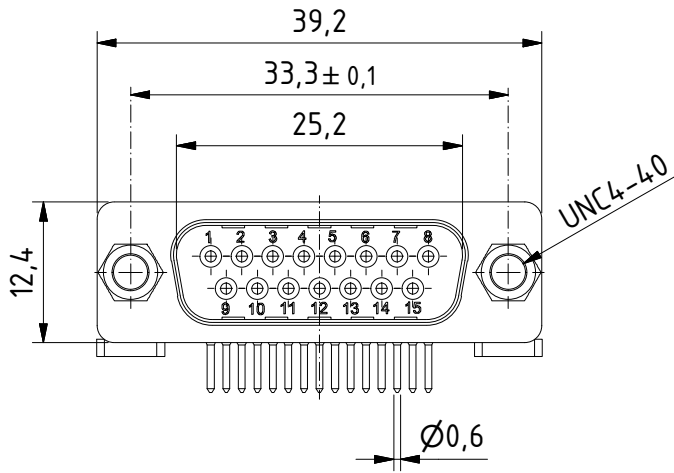

MATERIALS

- Insulator: Thermoplastic UL 94-V-0 white
- Contact: Copper alloy
- Contact finish: Quality class 2
- Shell: steel tin plated

CHARAKTERISTICS

- Working voltage: 125V
- Current rating: 5A
- Contact resistance: max. 10mΩ - DIN41652
- Insulation resistance: >5GΩ
- Temperature range: -55° - 125°C

General tolerances (Deltron standard)	
size in mm	tolerances
> 0,5	±0,1
up to 3	±0,2
> 3	±0,2
up to 6	±0,2
> 6	±0,2
up to 30	±0,2
> 30	±0,3
up to 120	±0,3

modification	Rev.	Rev.	Rev.	DE015353 part no.
	Rev.	Rev.	Rev.	
DTS15PYC/2M46UNB5	1.5:1 scale	drawn	17.06.2013	mr
		checked		
		approved		
 Industrie Neuhof 8c CH-3422 Kirchberg		K060761 drawing no.		