
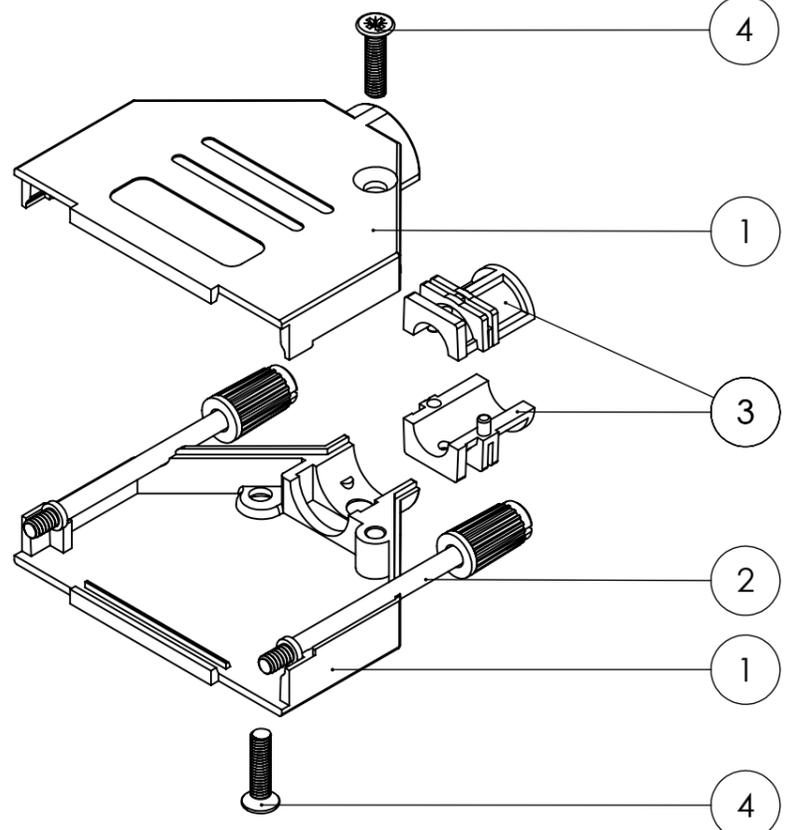
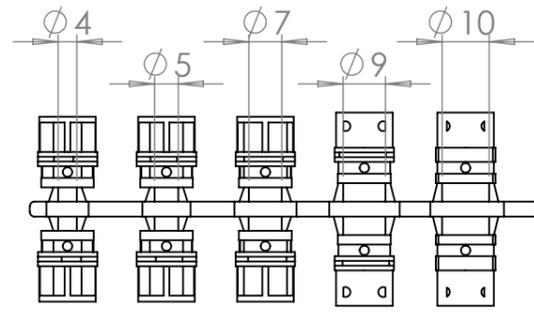
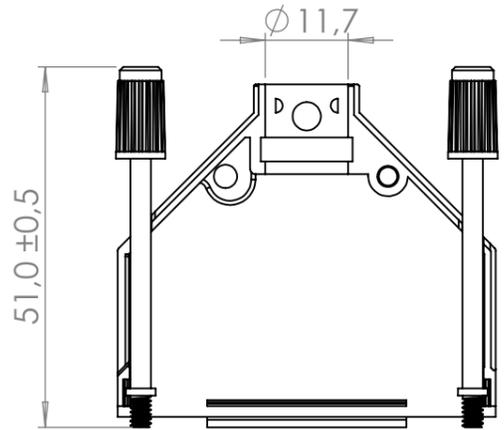
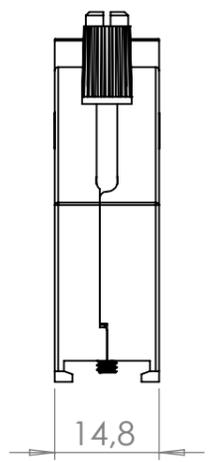


REVISION	CHANGES	DATE	NAME
1	First release	2023-11-22	Idriz Musliu

8 7 6 5 4 3 2 1

F
E
D
C
B
A

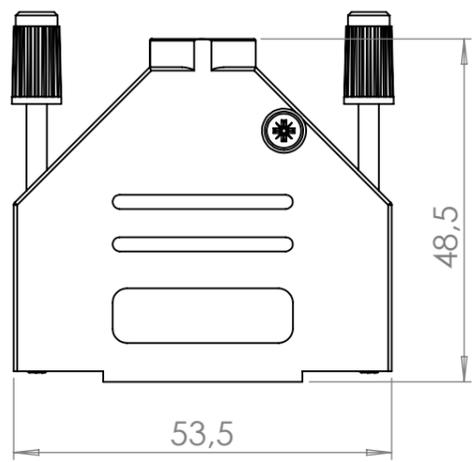

TECHNICAL SPECIFICATIONS

Operating temperature -40°C to +120°C
 Shielded
 Size: DB(25/HD 44)
1.Hood:
 Material: Zinc, Nickel plated, UL-recognized
 Cable Entry: Top
 Maximum OD: 11,7
2.Thumbscrew: UNC 4-40 (Standard), M2,5 or M3 on request
 Material: Steel, ABS
3.Grommet kit, 5 set
 Material: ABS
4.Screw M3x12
 Material: Steel
 Head: Pozidriv

Note: When ordering use Part No. in the table below

Part No. Single	Part No. BULK	Product code Single	Product code BULK	Bill of material (No.)Parts of the product
6560-3105-03	6561-3105-03	DTZK25-PCBK-K	DTZK25-PCBK	[1][2][3][4]

Bill of material			
No.	QTY	Part No.	Description
1.Hood			
1	1	6805-0105-03	Full metall hood
2.Thumbscrew			
2	2	6718-0101-01	JSFM-4 Thumbscrew
3.Grommet			
3	5	6522-0121-05	Black, 5 set
4.Screw			
4	2	6855-0117-02	M3x12 POZI DRV

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS
 TOLERANCES UNLESS OTHERWISE SPECIFIED:
 LINEAR: 0 ± 0.20
 0.0 ± 0.15
 0.00 ± 0.10
 ANGULAR: ± 0.5°

Drawn by:	IMU
Date:	2023-11-22
Approved by:	MRR
Approved date:	2023-11-22

SCALE: 1:1 SHEET 1 OF 1



TITLE:	DTZK25-PCBK FULL METAL COVER
DWG NO.	6688-9562-1
	See P/N above

F
E
D
C
B
A

8 7 6 5 4 3 2 1

This drawing must not without our, permission be copied, im-
parted to a third party or otherwise used without authorisa-
tion. Contravention will be prosecuted.

Denna ritning är vår egendom och skyddas enligt gällande lag
samt får ej utan vårt medgivande kopieras, delgivas annan eller
obehörigen användas.

A3