


No.	Changes and/or Note No.	Date	Sign	No.	Changes and/or Note No.	Date	Sign
1	Pin type and Electrical values	161129	MRR				

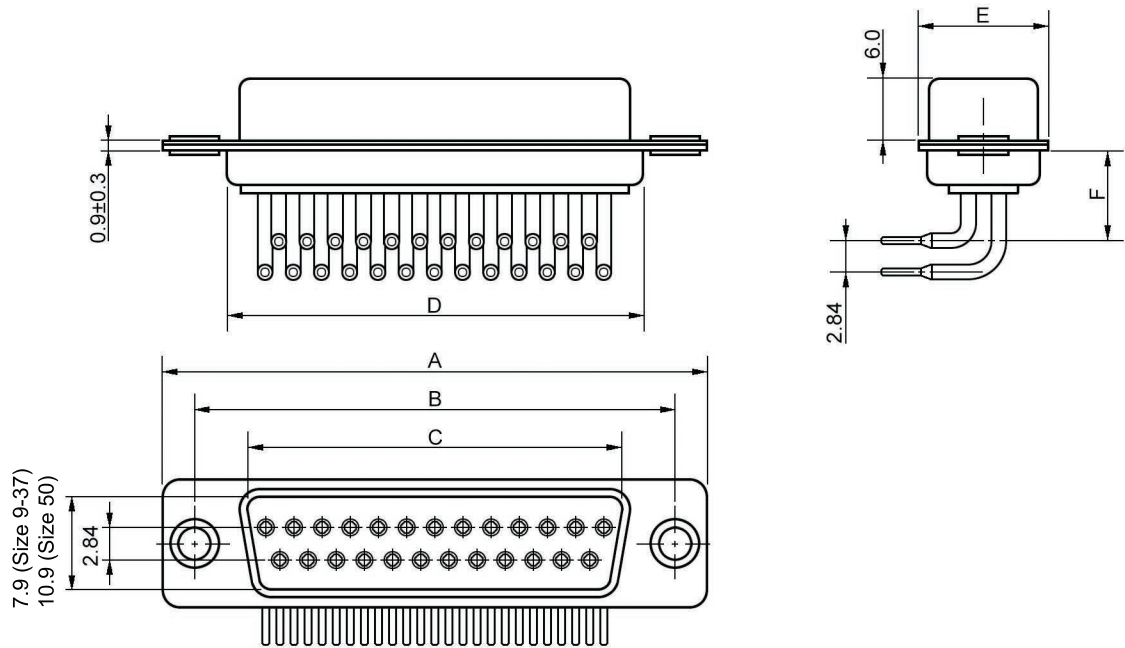


UNIT: (mm)

DIMENSIONS

Size:	A	B	C	D	E	F	Part No:
09P	30.81	24.99	16.33	19.28	12.60	9.4	2103-2200-11
15P	39.14	33.32	24.66	27.51	12.60	9.4	2103-2200-12
25P	53.04	47.04	38.38	41.30	12.60	9.4	2103-2200-13
37P	69.32	63.50	54.84	57.71	12.60	9.4	2103-2200-14
50P	66.92	61.11	52.34	55.10	15.30	9.4	2103-2200-15

PCB BOARD LAYOUT

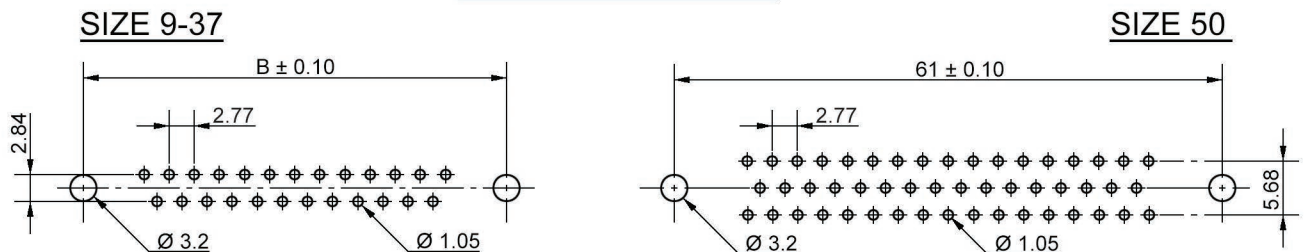

MATERIAL SPECIFICATIONS:

Shell: Steel, Tin Plated (Standard)
Nickel Plate on request
Insulator: Glass Filled PBT, UL 94 V-0
Contacts: Brass, Machined Pins
Gold over Nickel

TECHNICAL SPECIFICATIONS:

Current Rating: 3 Amp
Contact Resistance: 10 mΩ Max.
Insulator Resistance: 1000 MΩ Min.
Test Voltage: 1000V AC for 1 Minute
Operating Temperature: -55°C to +105°C

DATE 2012-05-03	DRAWN MRR	SCALE	MATERIAL TYPE	
	APPROVED		REPLACES	
			DDxx-FTBG-RBM Sub-D Female Dip Solder Connector Angled. 9.4mm footprint	
			DRAWING No.	 2103-2200-1x