
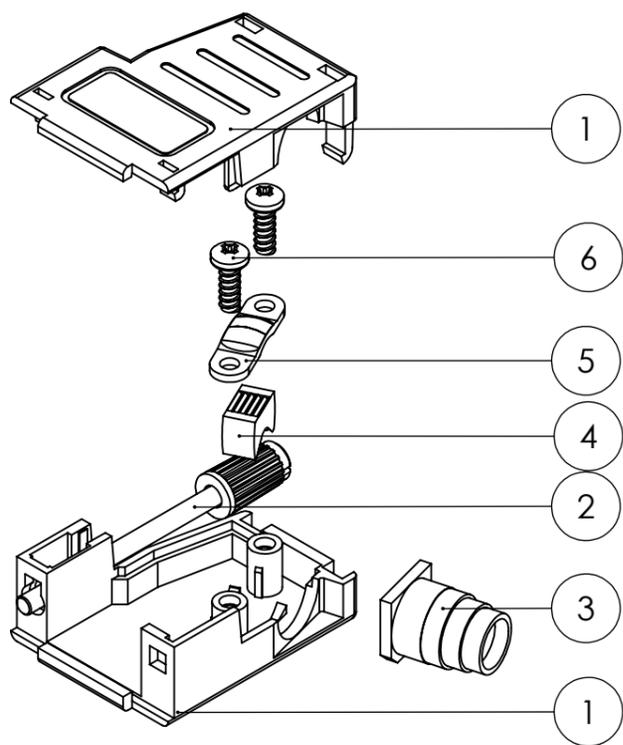
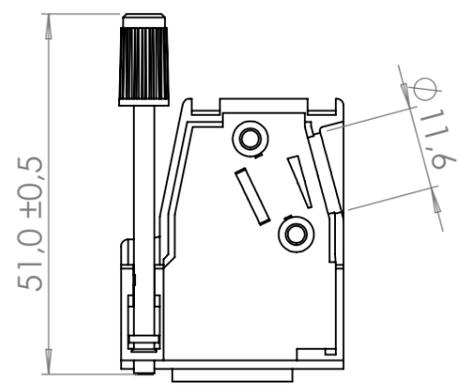
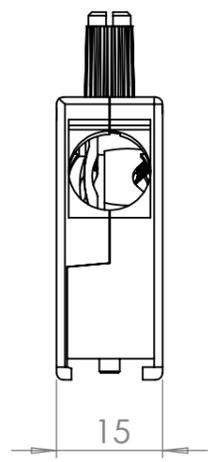


REVISION	CHANGES	DATE	NAME
1	First release	2023-10-13	Idriz Musliu

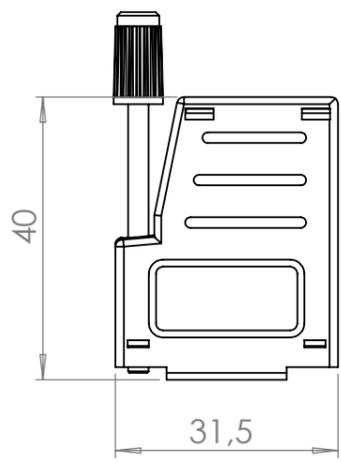

TECHNICAL SPECIFICATIONS

Operating temperature -55°C to +110°C
 Shielded
 Size: DE(9/HD 15)

- 1.Hood:**
Material: ABS, Nickel over Copper, UL-recognized
Cable Entry: Side
Maximum OD: 11.6
- 2.Thumbscrew:** UNC 4-40 (Standard), M2,5 or M3 on request
Material: Steel, ABS
- 3.Grommet**
Material: Metalized ABS (Cu/Ni)
Size: 3,3-10,3mm
- 4.Plastic insert, small**
Material: Metalized ABS
- 5.Cable clamp, small**
Material: Steel
- 6.Screw EPS 3x8**
Material: Steel
Head: Phillips

Note: When ordering use Part No. in the table below

Part No. Single	Part No. BULK	Product code Single	Product code BULK	Bill of material (No.)Parts of the product
6260-0106-11	6261-0106-11	DSSK-M-09-S-K	DSSK-M-09-S	[1][2][3][4][5][6]

Bill of material			
No.	QTY	Part No.	Description
1.Hood - lower & upper			
1	1	6811-0141-04	Metalized plastic cover
2.Thumbscrew			
2	1	6718-0102-01	Grey
3.Grommet			
3	2	6822-0121-36	Metalized grommet (comes in pair)
4.Plastic insert, small			
4	1	6838-0109-32	Metalized
5.Cable clamp, small			
5	1	6830-0106-01	
6.Screw			
6	2	6855-0109-01	Selftapping screw

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS

TOLERANCES UNLESS OTHERWISE SPECIFIED:
 LINEAR: 0 ± 0.20
 0.0 ± 0.15
 0.00 ± 0.10
 ANGULAR: ± 0.5°

SCALE: 1:1 SHEET 1 OF 1

A PART OF BEJERTECH

Drawn by:	IMU
Date:	2023-10-13
Approved by:	MRR
Approved date:	2023-10-13
TITLE:	DSSK-MS-09 - METALIZED PLASTIC COVER
DWG NO.	6688-9480-MS
	See P/N above

This drawing must not without our, permission be copied, im-
parted to a third party or otherwise used without authorisa-
tion. Contravention will be prosecuted.

Denna ritning är vår egendom och skyddas enligt gällande lag
samt får ej utan vårt medgivande kopieras, delgivas annan eller
obehörigen användas.

8 7 6 5 4 3 2 1

F
E
D
C
B
A

F
E
D
C
B
A

8 7 6 5 4 3 2 1