



No.	Changes and/or Note No.	Date	Intr.	No.	Changes and/or Note No.	Date	Intr.

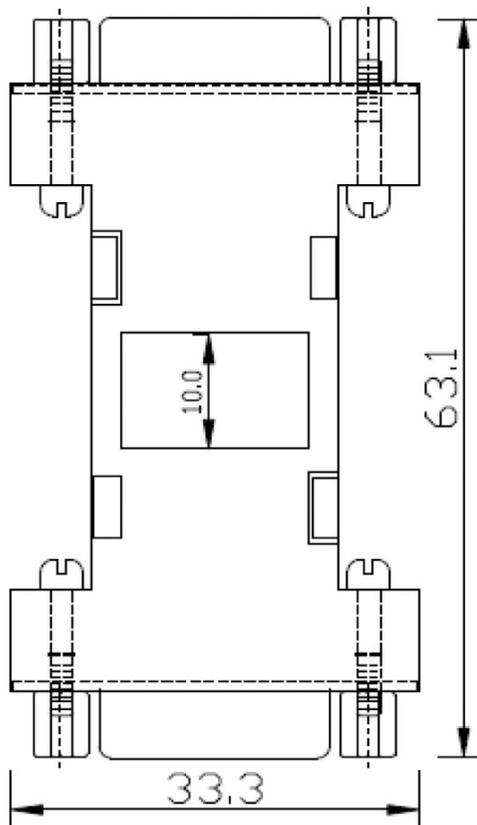

**PARTS OPTION**

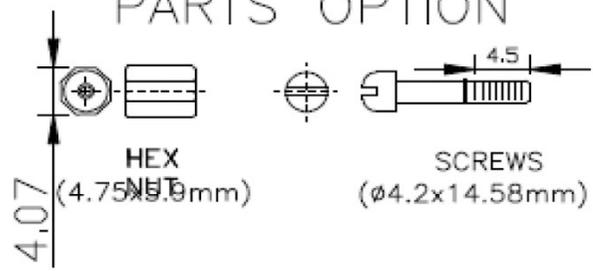

**SPECIFICATION**

**MATERIAL**

WIRE :PVC WIRE COMPOUND UL1007

Insulator: P.B.T & Glass fill reinforced UL94V-0

Contacts: Brass(standard);Phosphor Bronze(choose)

Shell: ABS UL94HB Finished Metalized

Rivet,Boardlock: Brass

**CONTACT PLATING**

Underplate: 50m" Nickel

Contact area: 1m" Selective Gold

**ELECTRICAL CHARACTERISTICS**

Operation voltage: 250 VAC max.

Current rating: 3 Amps max.

Contact resistance: 15 mohms max.

Insulation resistance: 3000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1000 VAC / minute

Operating temperature: -55°C TO +105°C

WIRE SPECIFICATION COUNT		
BLACK	F-F	1
BROWN	F-F	1
RED	F-F	1
ORANGE	F-F	1
YELLOW	F-F	1
GREEN	F-F	1
BLUE	F-F	1
VIOLET	F-F	1
GRAY	F-F	1

DATE	05/11/2012	DRAWN	SCALE	MATERIAL TYPE	
		APPROVED		REPLACES	
		9-way female to 9-way female-Met			
				DRAWING No	
				2111-0105-21	