
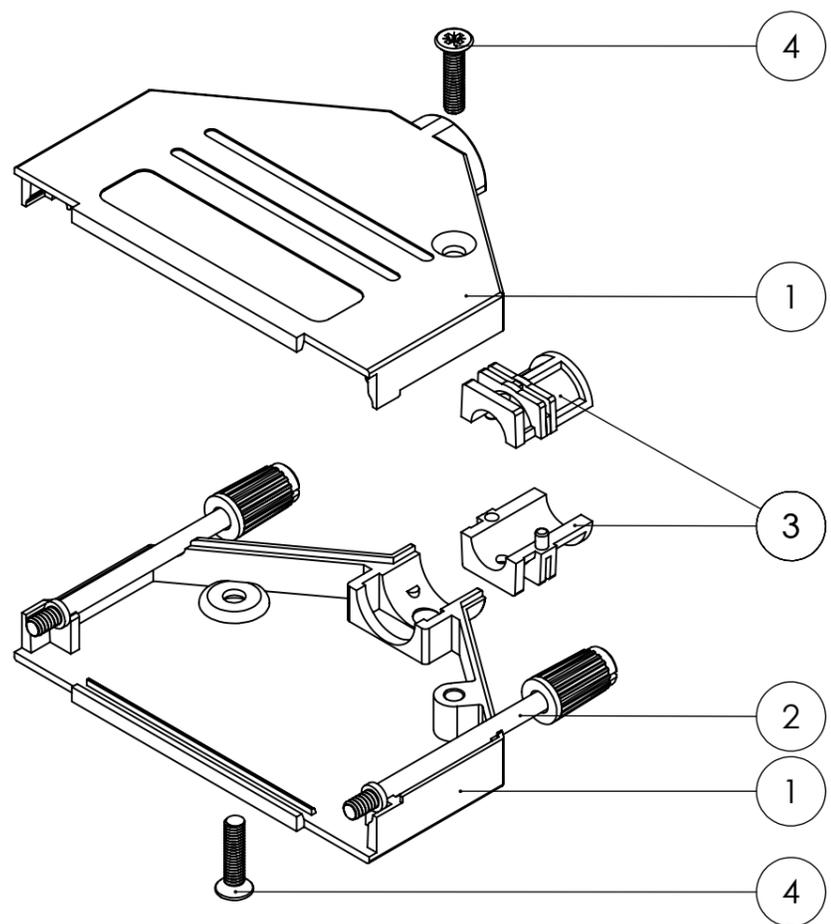
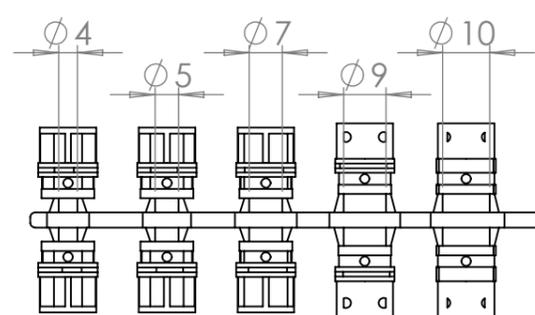
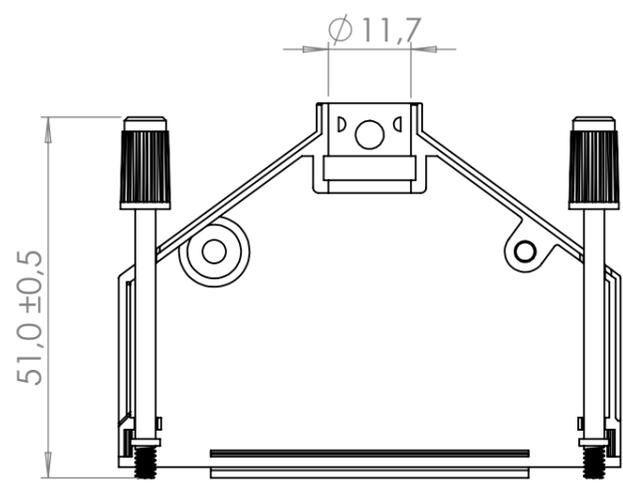
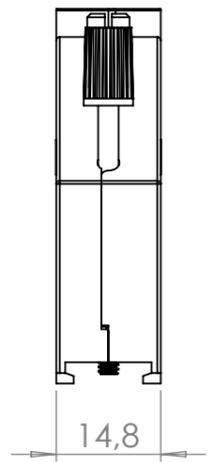


REVISION	CHANGES	DATE	NAME
1	First release	2023-11-22	Idriz Musliu

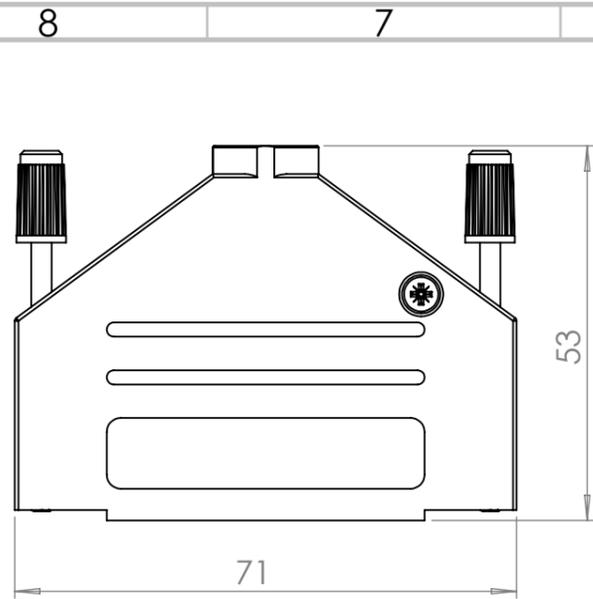

TECHNICAL SPECIFICATIONS

- Operating temperature** -40°C to +120°C
- Shielded**
- Size:** DC(37/HD 62)
- 1.Hood:**
Material: Zinc, Nickel plated, UL-recognized
Cable Entry: Top
Maximum OD: 11,7
- 2.Thumbscrew:** UNC 4-40 (Standard), M2,5 or M3 on request
Material: Steel, ABS
- 3.Grommet kit, 5 set**
Material: ABS
- 4.Screw M3x12**
Material: Steel
Head: Pozidriv

Note: When ordering use Part No. in the table below

Part No. Single	Part No. BULK	Product code Single	Product code BULK	Bill of material (No.)Parts of the product
6560-3105-04	6561-3105-04	DTZK37-PCBK-K	DTZK37-PCBK	[1][2][3][4]

Bill of material			
No.	QTY	Part No.	Description
1.Hood			
1	1	6805-0105-04	Full metall hood
2.Thumbscrew			
2	2	6718-0101-01	JSFM-4 Thumbscrew
3.Grommet			
3	5	6522-0121-05	Black, 5 set
4.Screw			
4	2	6855-0117-02	M3x12 POZI DRV

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS

TOLERANCES UNLESS OTHERWISE SPECIFIED:
 LINEAR: 0 ± 0.20
 0.0 ± 0.15
 0.00 ± 0.10
 ANGULAR: ± 0.5°

SCALE: 1:1 SHEET 1 OF 1

A PART OF BEJERTECH

Drawn by:	IMU
Date:	2023-11-22
Approved by	MRR
Approved date	2023-11-22
TITLE:	DTZK37-PCBK FULL METAL COVER
DWG NO.	6688-9563-1
See P/N above	
A3	

This drawing must not without our, permission be copied, im-
parted to a third party or otherwise used without authorisa-
tion. Contravention will be prosecuted.

Denna ritning är vår egendom och skyddas enligt gällande lag
samt får ej utan vårt medgivande kopieras, delgivas annan eller
obehörigen användas.