
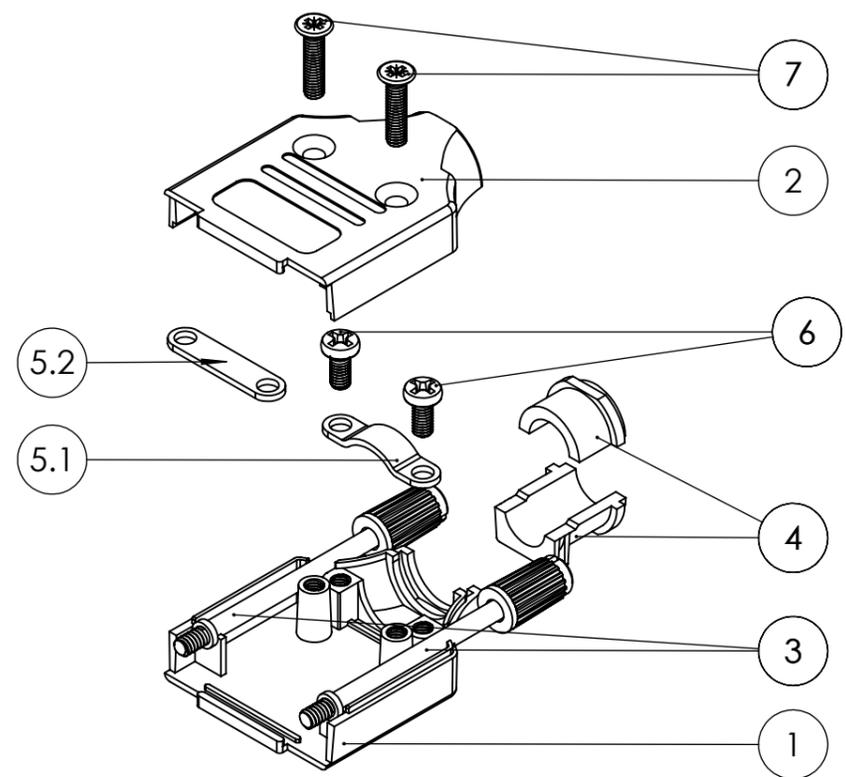
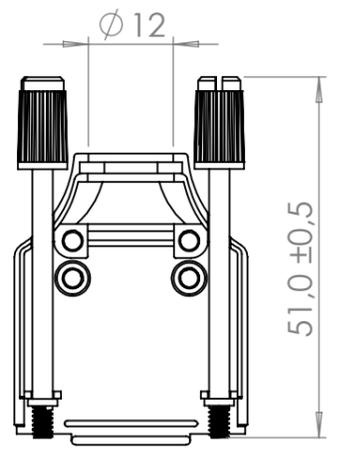
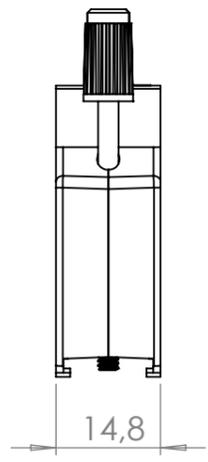


REVISION	CHANGES	DATE	NAME
1	First release	2024-08-23	Idriz Musliu

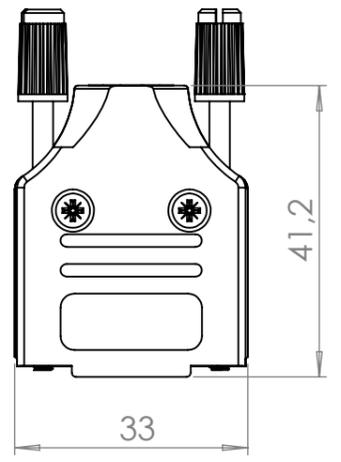

TECHNICAL SPECIFICATIONS

Operating temperature -40°C to +120°C
 Size: DE(09/HD 15)

1-2.Hood:

Material: Metal, Zinc
 Cable Entry: Top
 Maximum OD: 12,0

3.Jackscrew: UNC 4-40 (Standard), M2,5 or M3 on request
 Material: Steel. ABS

4.Ferrule

Material: ABS

5.1-5.2 Cable clamp

Material: Steel

6.Screw M3x6

Material: Steel
 Head: Pozidriv

7.Screw M3x12

Material: Steel
 Head: Pozidriv

Note: When ordering use Part No. in the table below


Part No. Single	Part No. BULK	Product code Single	Product code BULK	Bill of material (No.)Parts of the product
6560-3136-01	NA	MHDM09-PCBK-K	NA	[1][2][3][4][5][6][7]

Bill of material			
No.	QTY	Part No.	Description
1.Hood - Lower			
1	1	6805-0136-11	Full metal cover
2.Hood - Upper			
2	1	6805-0136-01	Full metal cover
3.Jackscrew			
3	2	6718-0101-01	JSPCBK UNC 4-40
4.Ferrule			
4	1	6522-0122-03	Ferrule kit, Metalized
5.Cable clamp			
5.1	1	6830-0109-01	Cable clamp, round MHDM
5.2	1	6830-0109-03	Cable clamp, flat (Alternativ to 5.1)Included
6.Screw			
6	2	6855-0117-13	Screw M3x6
7.Screw			
7	2	6855-0117-02	Screw M3x12

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS

TOLERANCES UNLESS OTHERWISE SPECIFIED:
 LINEAR: 0 ± 0.20
 0.0 ± 0.15
 0.00 ± 0.10
 ANGULAR: ± 0.5°

SCALE: 1:1 SHEET 1 OF 1



Drawn by:	IMU
Date:	2024-08-22
Approved by:	MRR
Approved date:	2024-08-23

TITLE: MHDM09-PCBK-K METAL COVER

DWG NO. 6688-9589-1

See P/N above

A3

This drawing must not without our, permission be copied, im-
parted to a third party or otherwise used without authorisa-
tion. Contravention will be prosecuted.

Denna ritning är vår egendom och skyddas enligt gällande lag
samt får ej utan vårt medgivande kopieras, delgivas annan eller
obehörigen användas.