


This drawing must not without our permission be copied, im-
parted to a third party or otherwise used without authorisa-
tion. Contravention will be prosecuted.

Denna ritning är vår egendom och skyddas enligt gällande lag
samt får ej utan vårt medgivande kopieras, delgivas annan eller
obehörigen användas.

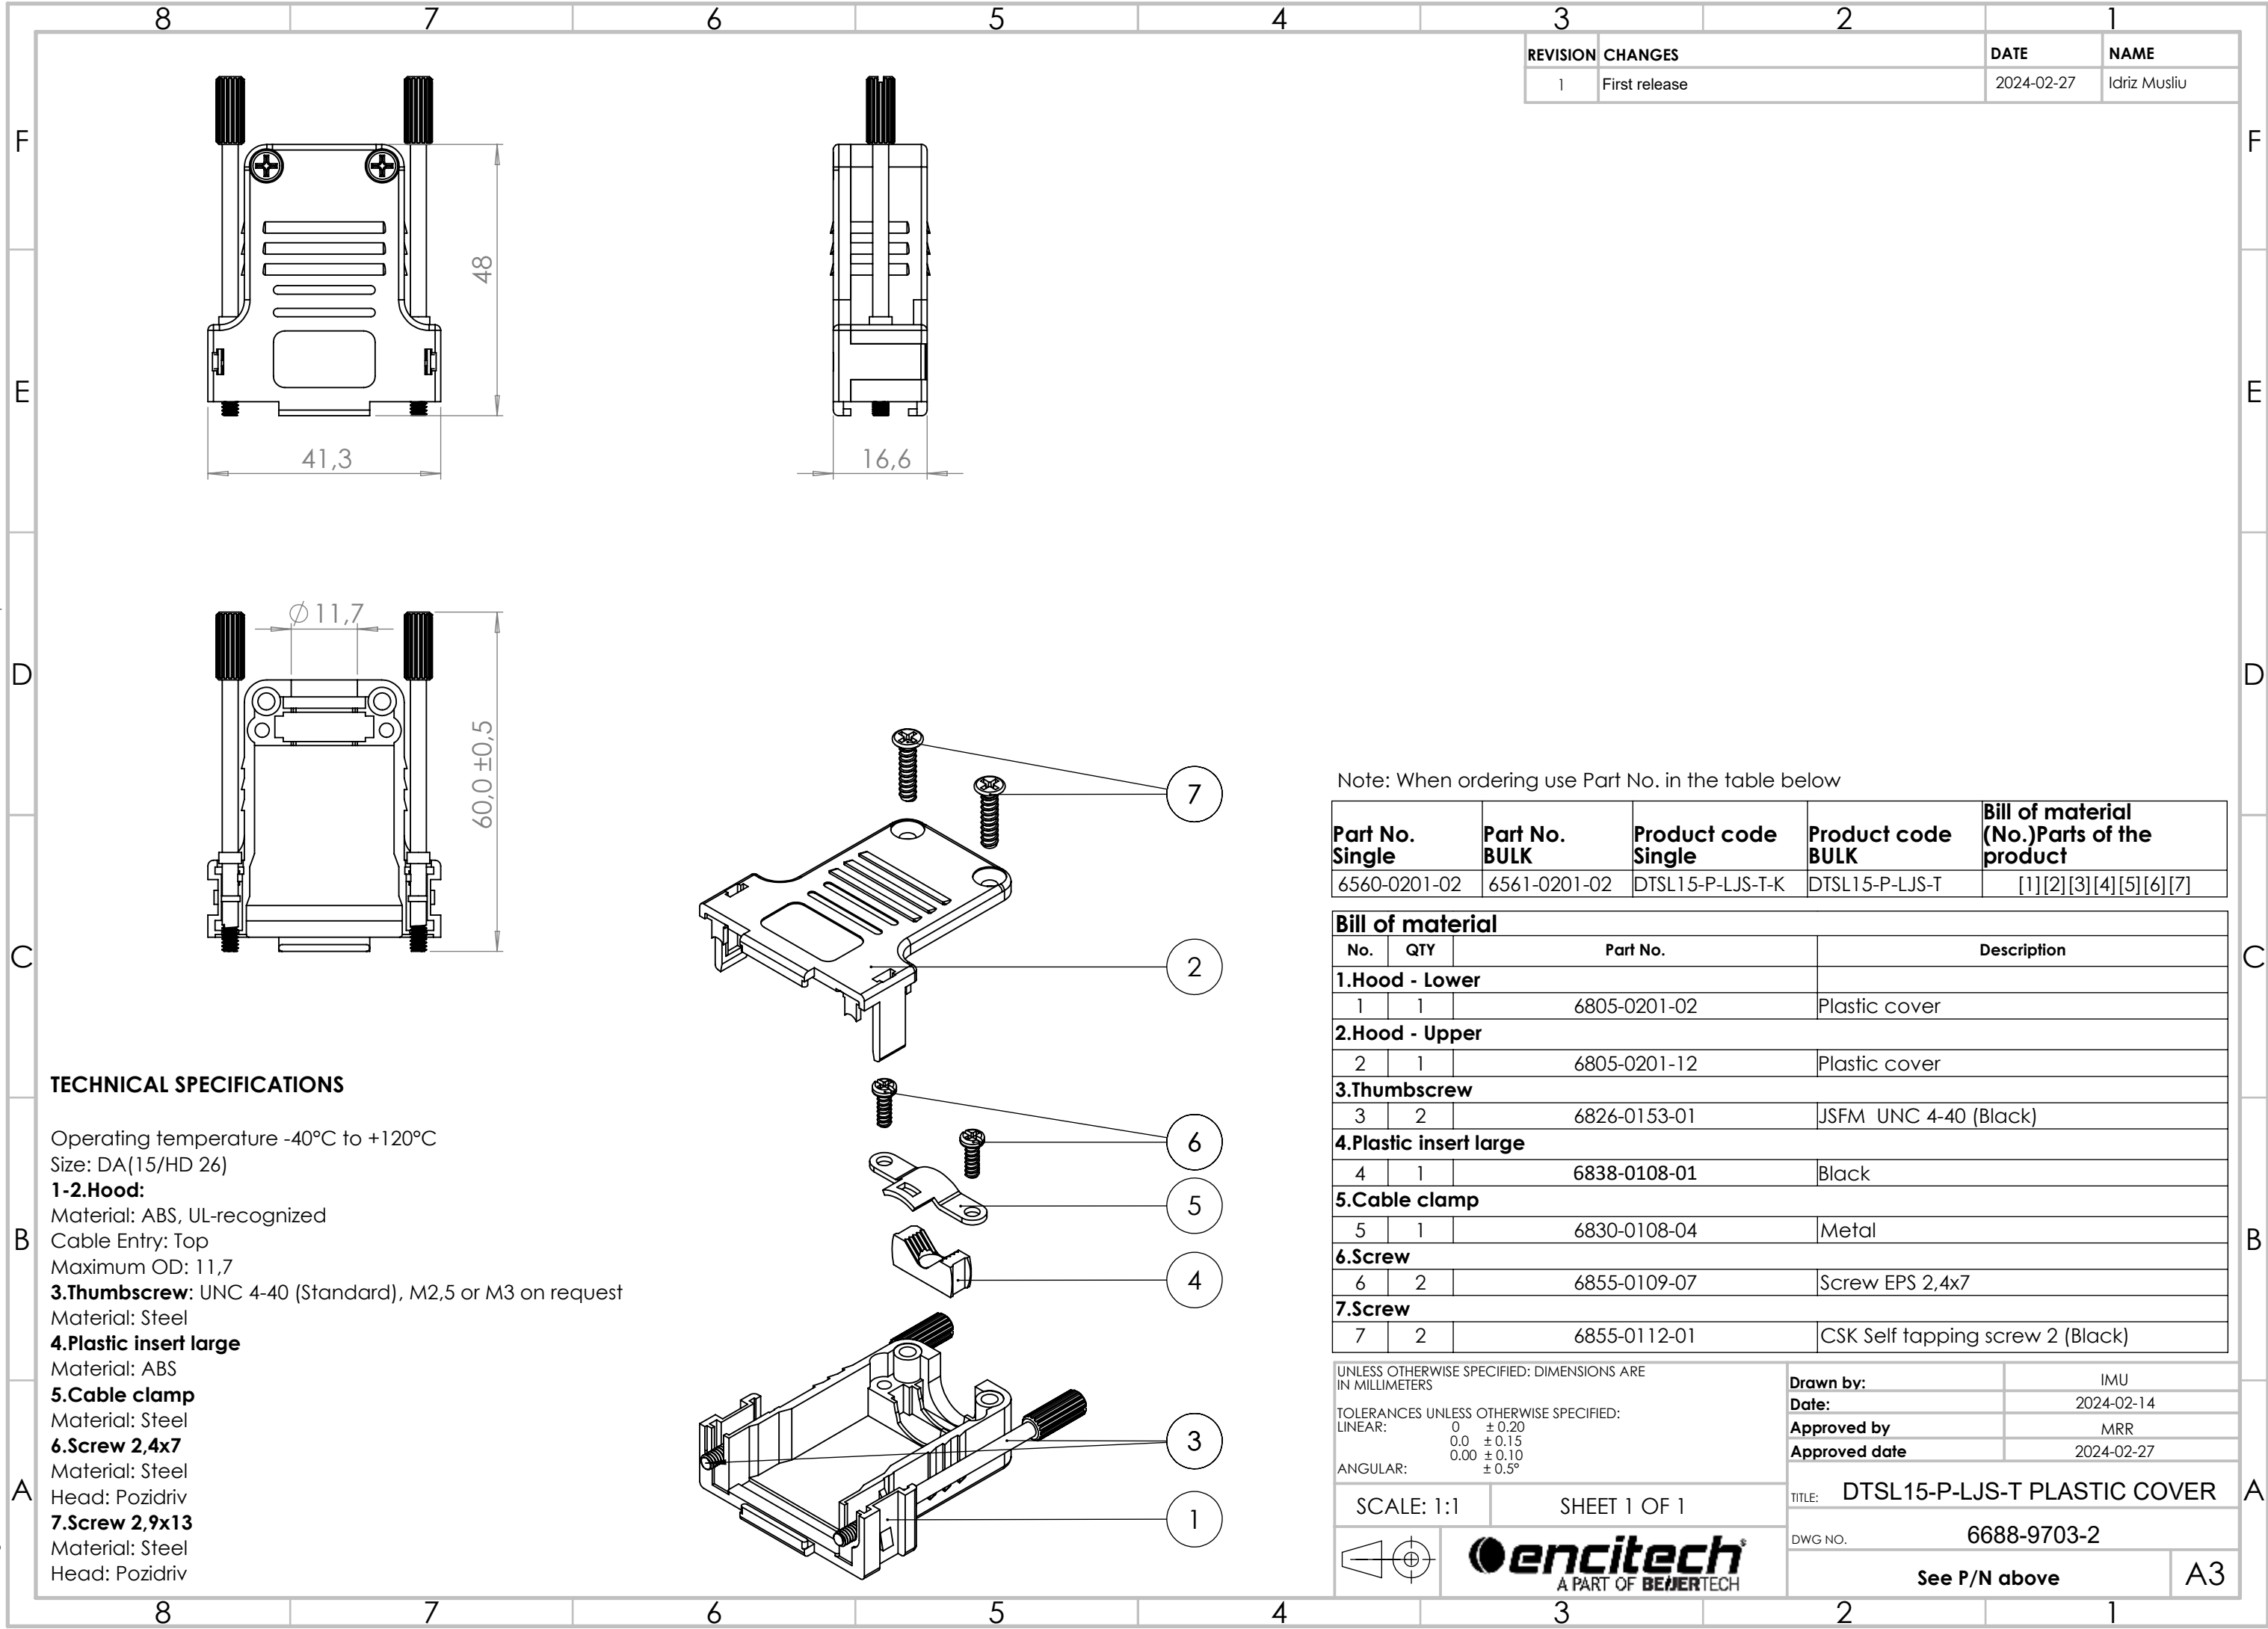

TECHNICAL SPECIFICATIONS

Operating temperature -40°C to +120°C
Size: DA(15/HD 26)
1-2.Hood:
Material: ABS, UL-recognized
Cable Entry: Top
Maximum OD: 11,7
3.Thumbscrew: UNC 4-40 (Standard), M2,5 or M3 on request
Material: Steel
4.Plastic insert large
Material: ABS
5.Cable clamp
Material: Steel
6.Screw 2,4x7
Material: Steel
Head: Pozidriv
7.Screw 2,9x13
Material: Steel
Head: Pozidriv

REVISION	CHANGES	DATE	NAME
1	First release	2024-02-27	Idriz Musliu

Note: When ordering use Part No. in the table below


Part No. Single	Part No. BULK	Product code Single	Product code BULK	Bill of material (No.)Parts of the product
6560-0201-02	6561-0201-02	DTSL15-P-LJS-T-K	DTSL15-P-LJS-T	[1][2][3][4][5][6][7]

Bill of material				
No.	QTY	Part No.	Description	
1.Hood - Lower			Plastic cover	
1	1	6805-0201-02		
2.Hood - Upper			Plastic cover	
2	1	6805-0201-12		
3.Thumbscrew			JSFM UNC 4-40 (Black)	
3	2	6826-0153-01		
4.Plastic insert large			Black	
4	1	6838-0108-01		
5.Cable clamp			Metal	
5	1	6830-0108-04		
6.Screw			Screw EPS 2,4x7	
6	2	6855-0109-07		
7.Screw			CSK Self tapping screw 2 (Black)	
7	2	6855-0112-01		

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE
IN MILLIMETERS

TOLERANCES UNLESS OTHERWISE SPECIFIED:
LINEAR: 0 ±0.20
0.0 ±0.15
0.00 ±0.10
ANGULAR: ±0.5°

SCALE: 1:1 SHEET 1 OF 1



Drawn by:	IMU
Date:	2024-02-14
Approved by	MRR
Approved date	2024-02-27

TITLE:	DTSL15-P-LJS-T PLASTIC COVER
DWG NO.	6688-9703-2
See P/N above	A3