


No.	Changes and/or Note No.	Date	Sign	No.	Changes and/or Note No.	Date	Sign

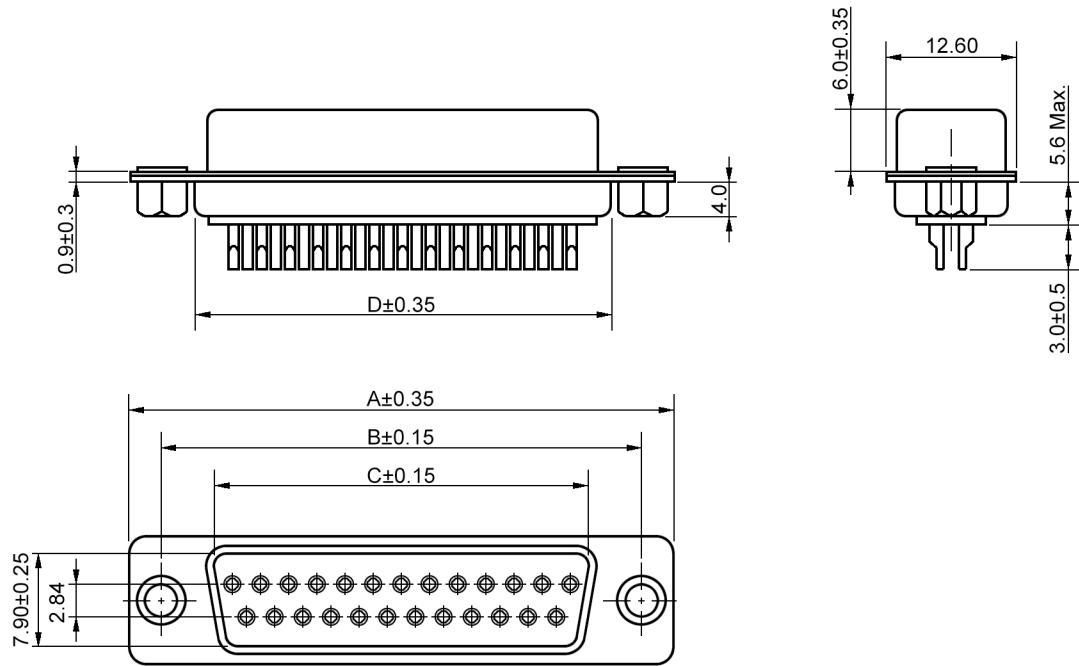

UNIT: (mm)

DIMENSIONS

Size:	A	B	C	D	Part No:
09P	30.80	24.99	16.30	19.20	2101-0181-11
15P	39.15	33.32	24.65	27.70	2101-0181-12
25P	53.00	47.04	38.40	41.10	2101-0181-13
37P	69.30	63.50	54.80	57.30	2101-0181-14

MATERIAL SPECIFICATIONS:

Shell: Steel, Tin or Ni Plated
Insulator: Glass Filled PBT, UL 94 V-0
Contacts: Brass, Stamped Pins
Gold over Nickel
Rivet: Copper-Alloy, Ni Plated

TECHNICAL SPECIFICATIONS:

Current Rating: 5 Amp Max.
Contact Resistance: 15 mΩ Max.
Insulator Resistance: 1000 MΩ Min.
Test Voltage: 500V AC for 1 Minute
Operating Temperature: -55°C to +105°C

DATE 2011-06-10	DRAWN MRR	SCALE	MATERIAL TYPE	
	APPROVED		REPLACES	
			DBxx-SS - K Sub-D Female with Back-Nut "Option K"	
			DRAWING No.	2101-0181-1x