



RoHS compliant

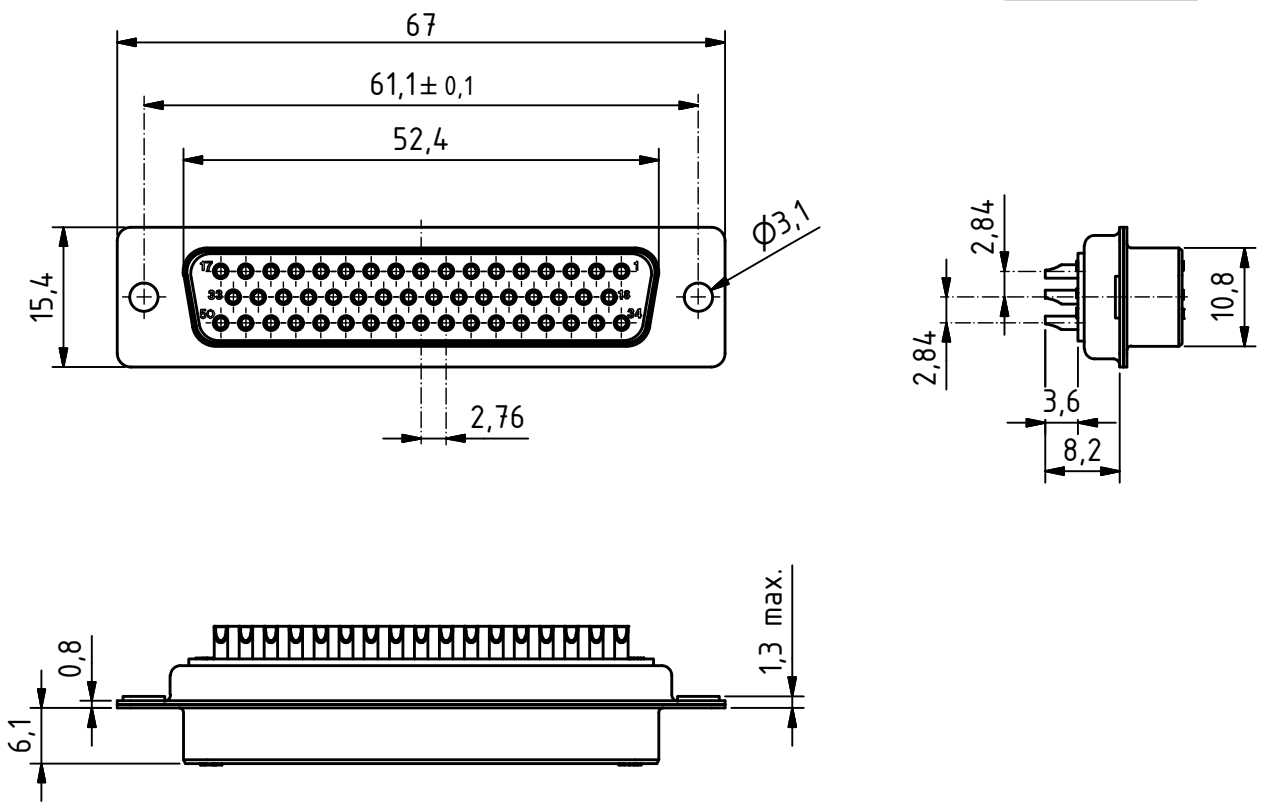

suitable for cable AWG 18

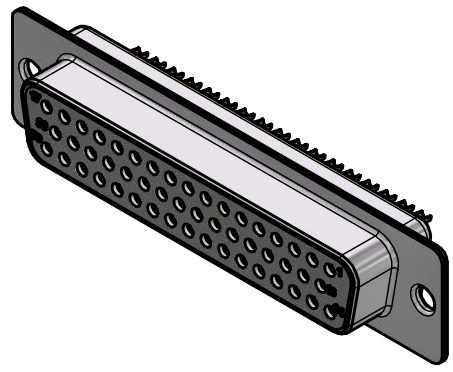

MATERIALS

- Insulator: Thermoplastic UL 94-V-0 white
- Contact: Machined / Copper alloy
- Contact finish: Quality class 2
- Shell: steel tin plated

CHARAKTERISTICS

- Working voltage: 125V
- Current rating: 7.5A
- Contact resistance: max. 10mΩ - DIN41652
- Insulation resistance: >5GΩ
- Temperature range: -55° to +125°C

General tolerances (Deltron standard)			
size in mm	> 3	> 6	> 30
> 0.5	up to 3	up to 6	up to 30
	up to 3	up to 6	up to 120
tolerances			
	±0.1	±0.2	±0.3

modification	Rev. a) 29.03.2010 mr	Rev.	Rev.	DE002196 part no.		
	Rev.	Rev.	Rev.			
DTS50SZ/2	1.2:1 scale	drawn	27.01.1998	mr		
		checked				
		approved				
		Industrie Neuhof 8c CH-3422 Kirchberg www.d-sub.swiss		K050020 a drawing no.		