
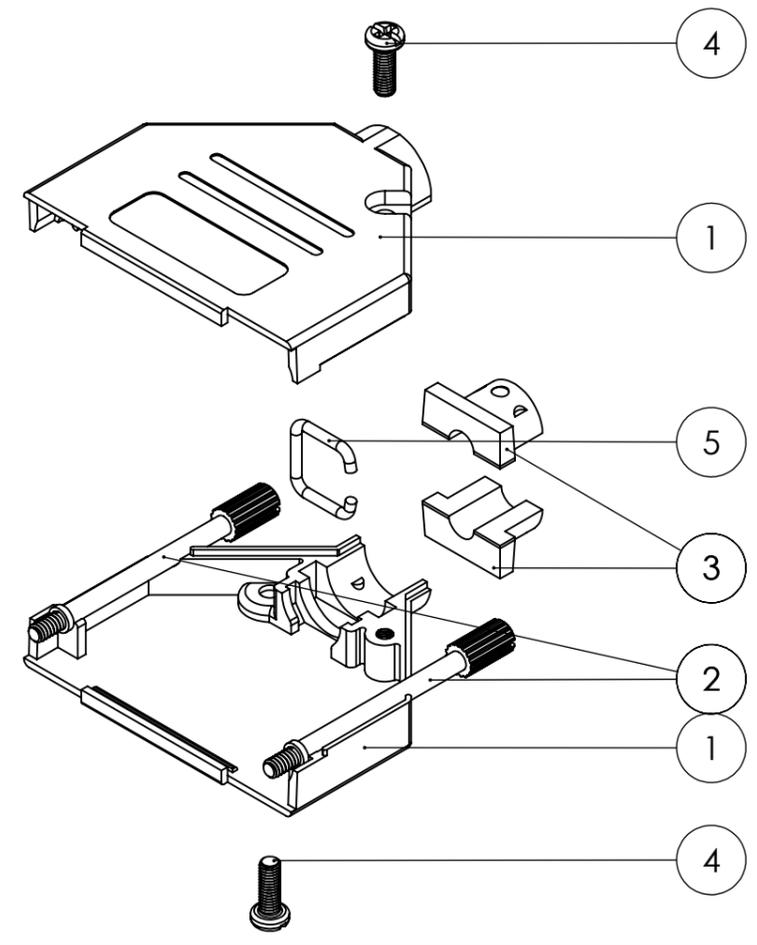
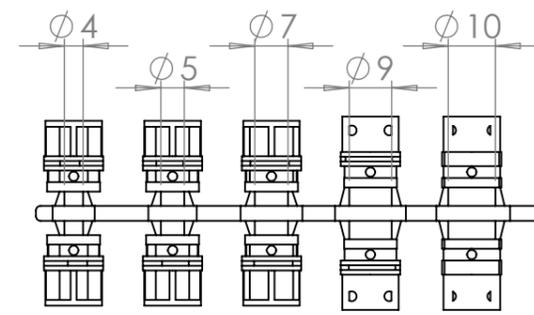
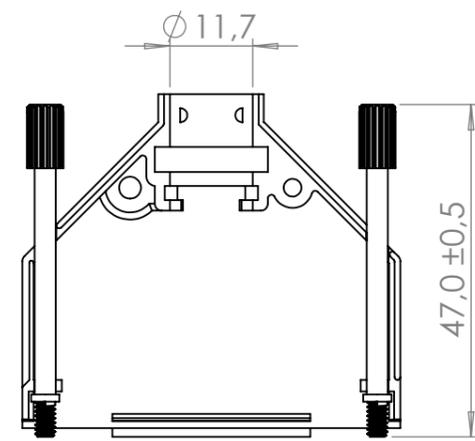
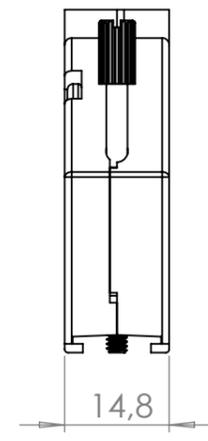


REVISION	CHANGES	DATE	NAME
1	First release	2024-01-10	Idriz Musliu

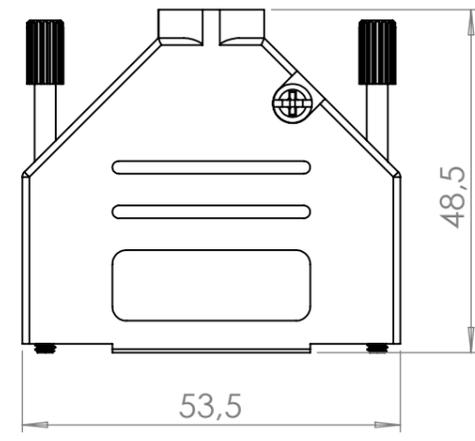

**TECHNICAL SPECIFICATIONS**

Operating temperature -40°C to +120°C  
 Shielded  
 Size: DB(25/HD 44)

- 1.Hood:**  
 Material: Zinc, Nickel/Black plated, UL-recognized  
 Cable Entry: Top  
 Maximum OD: 11,7
- 2.Thumbscrew:** UNC 4-40 (Standard), M2,5 or M3 on request  
 Material: Steel
- 3.Grommet kit, 5 set**  
 Material: ABS
- 4.Screw M3x12**  
 Material: Steel  
 Head: Pozidriv
- 5.DTCK-D6-C-Clip**  
 Material: Steel

Note: When ordering use Part No. in the table below

Part No. Single	Part No. BULK	Product code Single	Product code BULK	Bill of material (No.)Parts of the product
6560-0805-03	6561-0805-03	DTCK25-K	DTCK25	[1.1][2.1][3][4.1][5]
6560-0815-03	NA	DTCK25-BK-K	NA	[1.2][2.2][3][4.2][5]

Bill of material			
No.	QTY	Part No.	Description
<b>1.Hood</b>			
1.1	2	6805-0805-03	Full metall hood
1.2	2	6805-0815-03	Full metall hood - Black
<b>2.Thumbscrew</b>			
2.1	2	6826-0141-02	JSFM-4Full metall thumbscrew
2.2	2	6826-0142-02	JSFM-4Full metall thumbscrew - Black
<b>3.Grommet</b>			
3	5	6522-0121-02	Black, 5 set
<b>4.Screw</b>			
4.1	2	6855-0116-05	M3x12 POZI DRV
4.2	2	6855-0117-07	M3x12 POZI DRV - Black
<b>5.DTCK-D6-C-Clip</b>			
5	1	6523-0101-01	Clip

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS

TOLERANCES UNLESS OTHERWISE SPECIFIED:  
 LINEAR: 0 ±0.20  
 0.0 ±0.15  
 0.00 ±0.10  
 ANGULAR: ±0.5°

Drawn by:	IMU
Date:	2023-12-28
Approved by:	MRR
Approved date:	2024-01-10

SCALE: 1:1 SHEET 1 OF 1

A PART OF BEJERTECH

TITLE:	DTCK25 - FULL METAL COVER
DWG NO.	6688-9553
	See P/N above

A3

This drawing must not without our, permission be copied, im-  
 parted to a third party or otherwise used without authorisa-  
 tion. Contravention will be prosecuted.

Denna ritning är vår egendom och skyddas enligt gällande lag  
 samt får ej utan vårt medgivande kopieras, delgivas annan eller  
 obehörigen användas.