
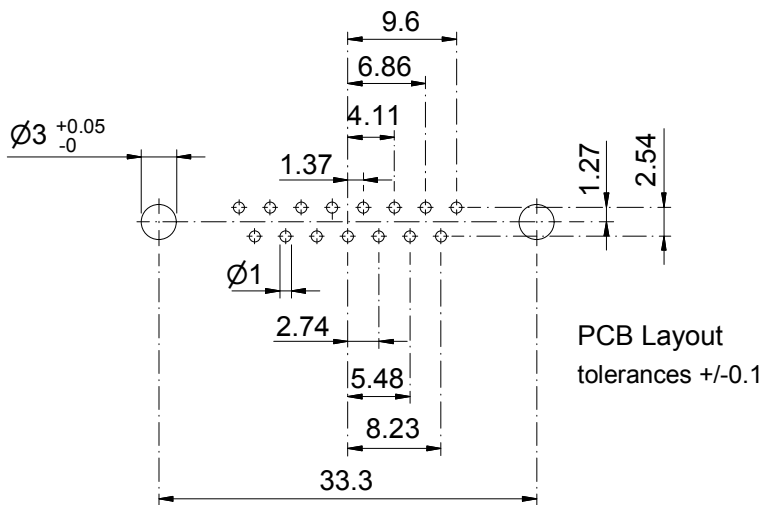
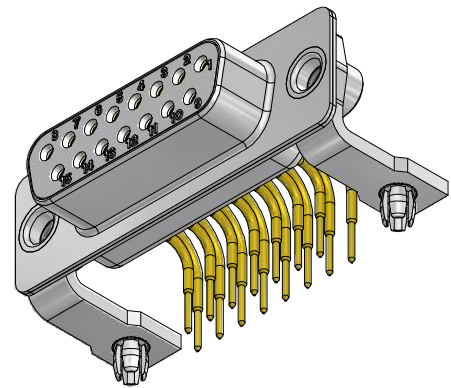
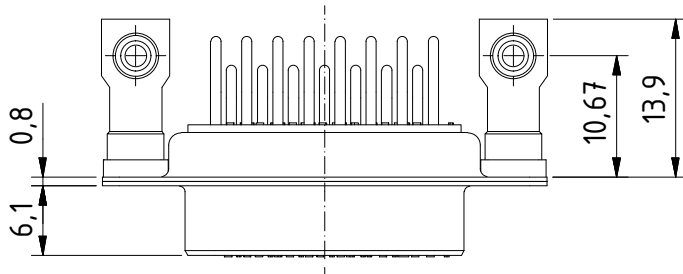
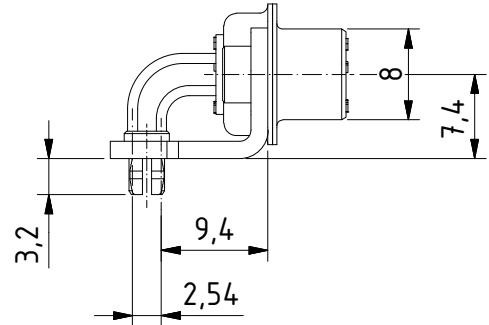


RoHS compliant

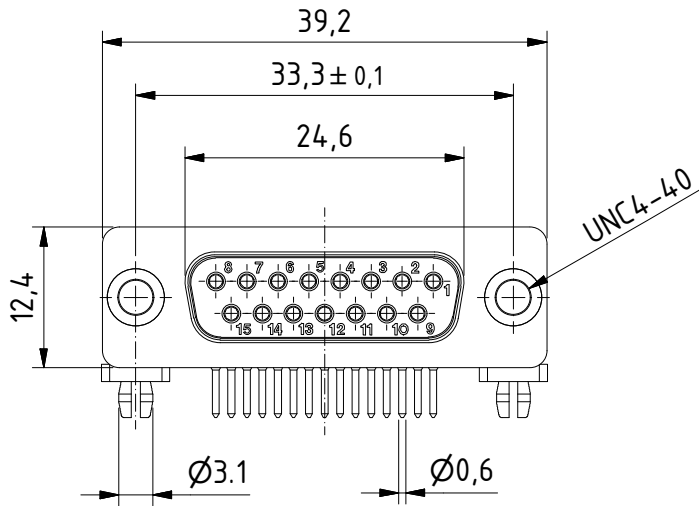

**MATERIALS**

- Insulator: Thermoplastic UL 94-V-0 white
- Contact: Copper alloy
- Contact finish: Quality class 2
- Shell: steel tin plated

**CHARAKTERISTICS**

- Working voltage: 125V
- Current rating: 5A
- Contact resistance: max. 10mΩ - DIN41652
- Insulation resistance: >5GΩ
- Temperature range: -55° - 125°C

General tolerances (Deltron standard)			
size in mm			
> 0.5	> 3	> 6	> 30
up to 3	up to 6	up to 30	up to 120
tolerances			
±0.1	±0.2	±0.2	±0.3

modification	Rev.	Rev.	Rev.	DE006132		
	Rev.	Rev.	Rev.	part no.		
DTS15SYC/2M4 7UN	1.5:1 scale	drawn	08.04.2009	nf		
		checked				
		approved				
 Industrie Neuohof 8c CH-3422 Kirchberg		K050367 drawing no.				