
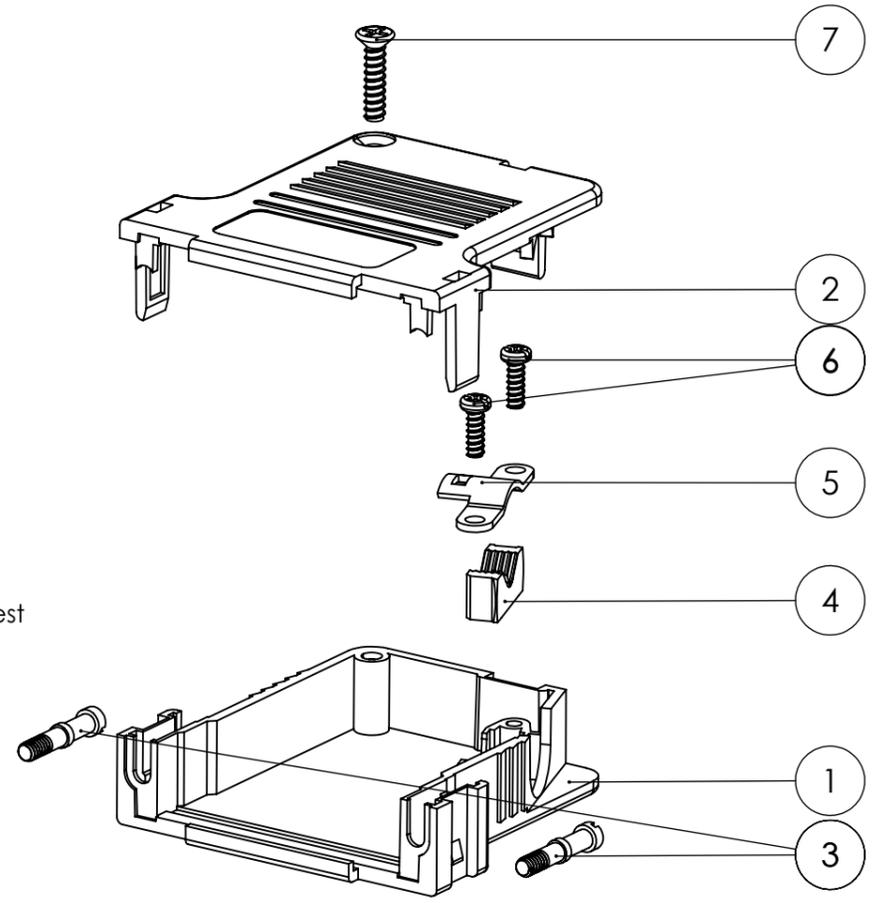
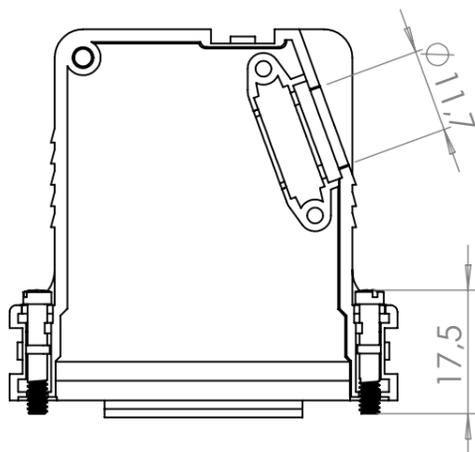
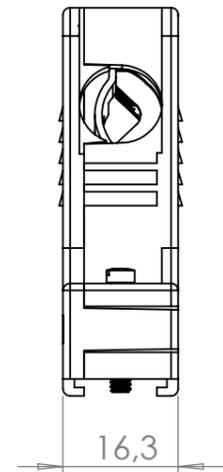


REVISION	CHANGES	DATE	NAME
1	First release	2024-06-12	Idriz Musliu

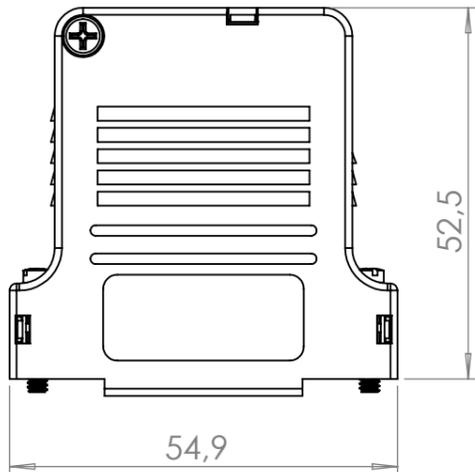

TECHNICAL SPECIFICATIONS

Operating temperature -40°C to +120°C
 Size: DB(25/HD 44)

- 1-2.Hood:**
Material: ABS, UL-recognized
Cable Entry: Side
Maximum OD: 11,7
- 3.Jackscrew:** UNC 4-40 (Standard), M2,5 or M3 on request
Material: Steel
- 4.Plastic insert large**
Material: ABS
- 5.Cable clamp**
Material: Steel
- 6.Screw 2,4x7**
Material: Steel
Head: Phillips
- 7.Screw 2,9x13**
Material: Steel
Head: Phillips

Note: When ordering use Part No. in the table below

Part No. Single	Part No. BULK	Product code Single	Product code BULK	Bill of material (No.)Parts of the product
6560-6201-13	6561-6201-13	DTSL25-P-SJS-S-K	DTSL25-P-SJS-S	[1][2][3][4][5][6][7]

Bill of material			
No.	QTY	Part No.	Description
1.Hood - Lower			
1	1	6805-0202-03	Plastic cover
2.Hood - Upper			
2	1	6805-0202-13	Plastic cover
3.Jackscrew			
3	2	6826-0153-02	JSFM UNC 4-40
4.Plastic insert large			
4	1	6838-0108-01	Black
5.Cable clamp			
5	1	6830-0108-04	Cable Clamp DTSL 15-37 way
6.Screw			
6	2	6855-0109-07	Screw EPS 2,4x7
7.Screw			
7	1	6855-0112-02	CSK Self tapping screw 2 (Black)

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS

TOLERANCES UNLESS OTHERWISE SPECIFIED:
 LINEAR: 0 ±0.20
 0,0 ±0.15
 0,00 ±0.10
 ANGULAR: ±0.5°

SCALE: 1:1 SHEET 1 OF 1

A PART OF BEJERTECH

Drawn by:	IMU
Date:	2024-06-11
Approved by:	MRR
Approved date:	2024-06-12
TITLE:	DTSL25-P-SJS-S PLASTIC COVER
DWG. NO.:	6688-9713-1
See P/N above	

This drawing must not without our, permission be copied, im-
parted to a third party or otherwise used without authorisa-
tion. Contravention will be prosecuted.

Denna ritning är vår egendom och skyddas enligt gällande lag
samt får ej utan vårt medgivande kopieras, delgivas annan eller
obehörigen användas.