

| REVISION | CHANGES       | DATE       | NAME         |
|----------|---------------|------------|--------------|
| 1        | First release | 2023-11-27 | Idriz Musliu |

8 7 6 5 4 3 2 1

F

E

D

C

B

A

F






E

D

C

B

A

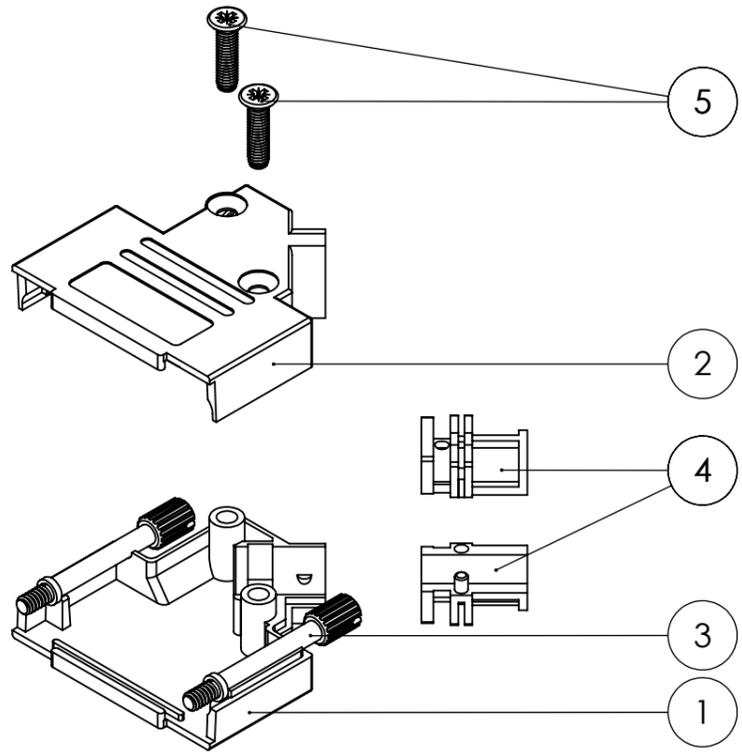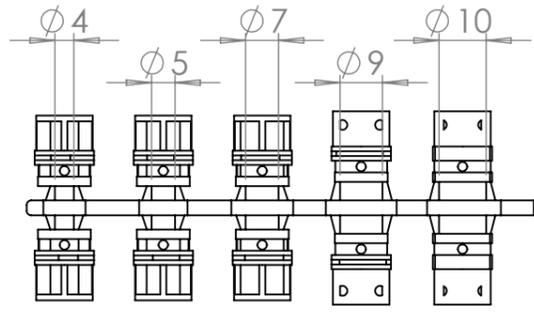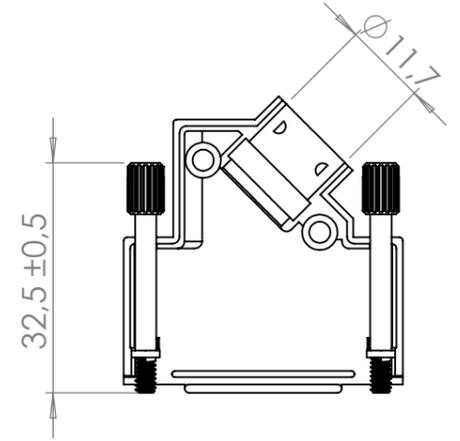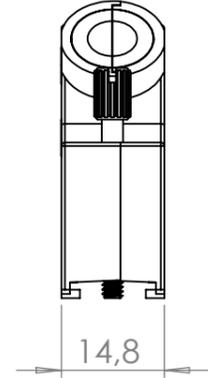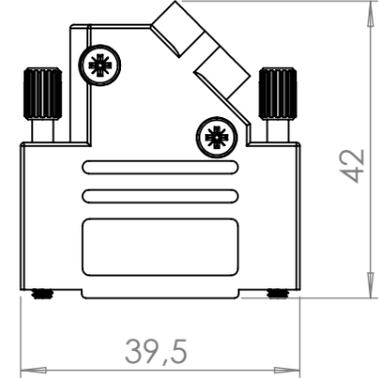

**TECHNICAL SPECIFICATIONS**

Operating temperature -40°C to +120°C  
 Shielded  
 Size: DA(15/HD 26)  
**1-2.Hood:**  
 Material: Zinc, Nickel plated, UL-recognized  
 Cable Entry: 45°  
 Maximum OD: 11,7  
**3.Thumbscrew:** UNC 4-40 (Standard), M2,5 or M3 on request  
 Material: Brass  
**4.Grommet kit, 5 set**  
 Material: ABS  
**5.Screw M3x12**  
 Material: Brass  
 Head: Pozidriv

Note: When ordering use Part No. in the table below

| Part No. Single | Part No. BULK | Product code Single | Product code BULK | Bill of material (No.)Parts of the product |
|-----------------|---------------|---------------------|-------------------|--|
| 6560-0166-12    | 6561-0166-12  | D45ZK15-NM-K        | D45ZK15-NM        | [1][2][3][4][5]                            |

| Bill of material    |     |              |                             |  |
|---------------------|-----|--------------|-----------------------------|--|
| No.                 | QTY | Part No.     | Description                 |  |
| <b>1.Hood</b>       |     |              |                             |  |
| 1                   | 1   | 6805-0106-12 | Full metall hood - Lower    |  |
| <b>2.Hood</b>       |     |              |                             |  |
| 2                   | 1   | 6805-0106-02 | Full metall hood - Upper    |  |
| <b>3.Thumbscrew</b> |     |              |                             |  |
| 3                   | 2   | 6826-0141-01 | JSFM Full metall thumbscrew |  |
| <b>4.Grommet</b>    |     |              |                             |  |
| 4                   | 5   | 6522-0121-05 | Black, 5 set                |  |
| <b>5.Screw</b>      |     |              |                             |  |
| 5                   | 2   | 6855-0117-15 | M3x12 POZI DRV              |  |

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS  
 TOLERANCES UNLESS OTHERWISE SPECIFIED:  
 LINEAR: 0 ± 0.20  
 0,0 ± 0.15  
 0,00 ± 0.10  
 ANGULAR: ± 0.5°

SCALE: 1:1 SHEET 1 OF 1

A PART OF BEIJERTECH

|                |                               |
|----------------|-------------------------------|
| Drawn by:      | IMU                           |
| Date:          | 2023-11-23                    |
| Approved by:   | MRR                           |
| Approved date: | 2023-11-27                    |
| TITLE:         | D45ZK15-NM NON MAGNETIC COVER |
| DWG NO.:       | 6688-9681                     |
| See P/N above  |                               |
| A3             |                               |

8 7 6 5 4 3 2 1

This drawing must not without our, permission be copied, im-  
 parted to a third party or otherwise used without authorisa-  
 tion. Contravention will be prosecuted.

Denna ritning är vår egendom och skyddas enligt gällande lag  
 samt får ej utan vårt medgivande kopieras, delgivas annan eller  
 obehörigen användas.