


This drawing must not without our, permission be copied, im-
parted to a third party or otherwise used without authorisa-
tion. Contravention will be prosecuted.

Denna ritning är vår egendom och skyddas enligt gällande lag
samt får ej utan vårt medgivande kopieras, delgivas annan eller
obehörigen användas.

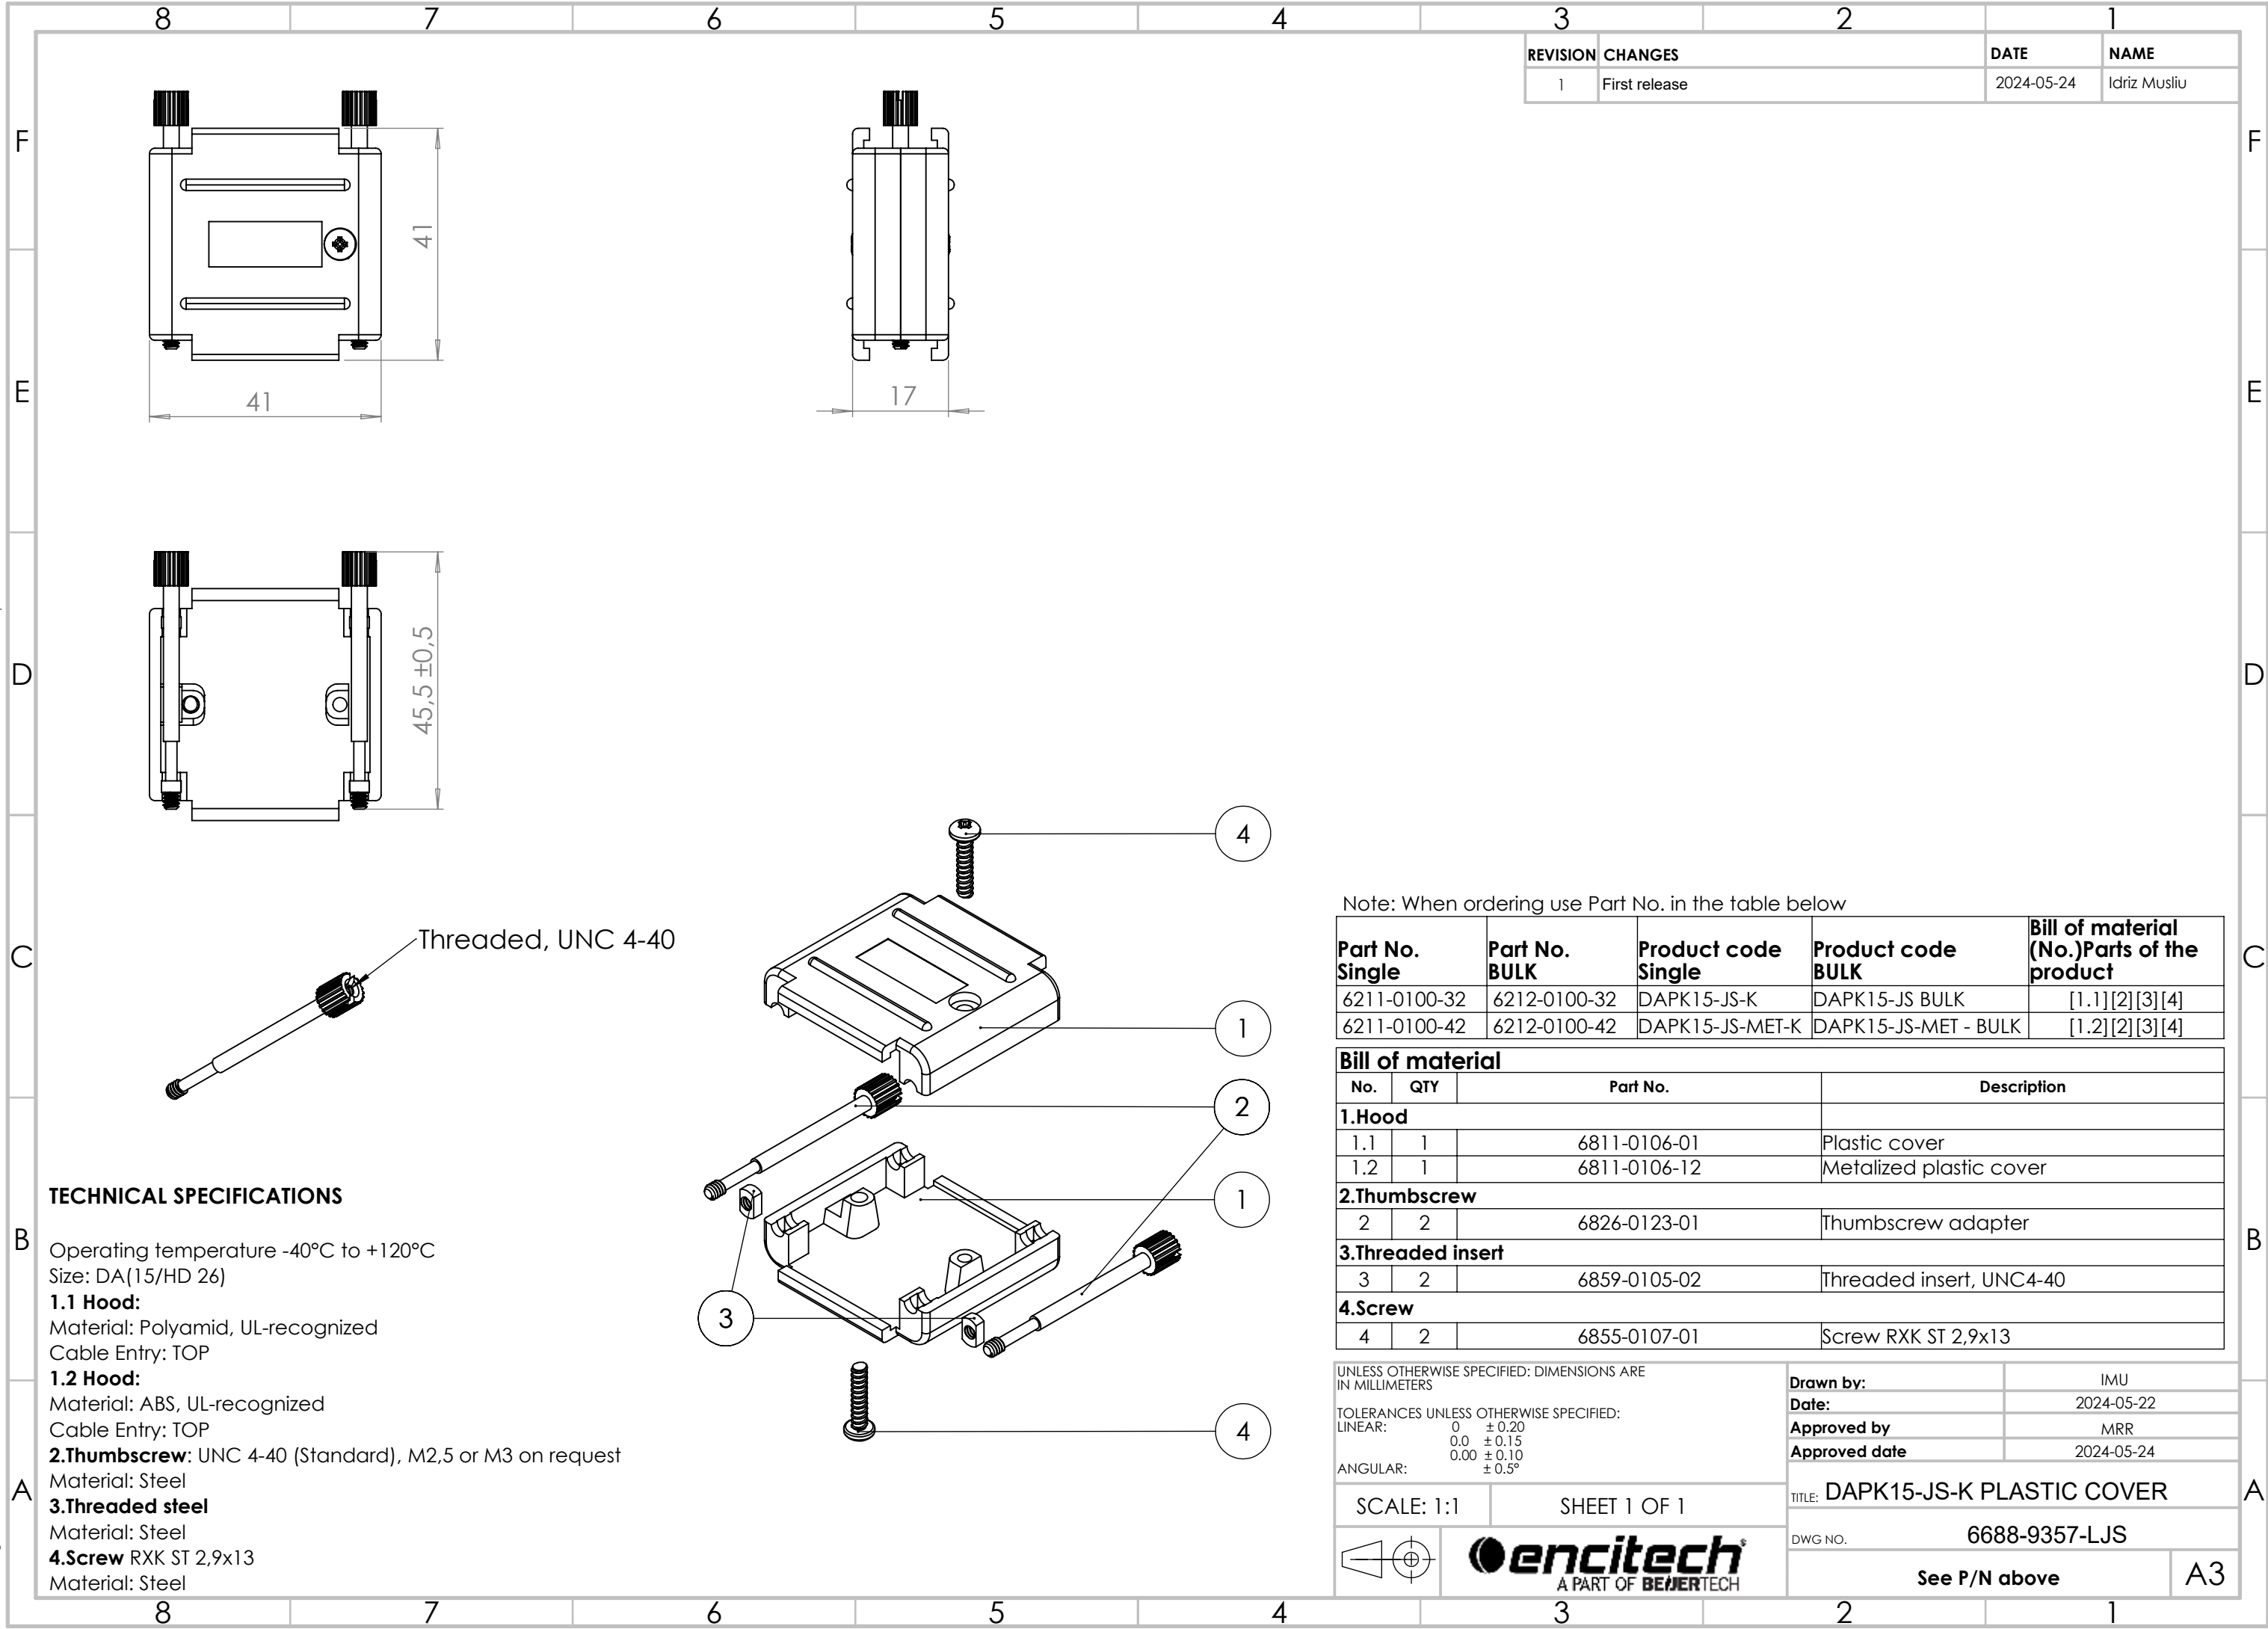

TECHNICAL SPECIFICATIONS

Operating temperature -40°C to +120°C
Size: DA(15/HD 26)
1.1 Hood:
Material: Polyamid, UL-recognized
Cable Entry: TOP
1.2 Hood:
Material: ABS, UL-recognized
Cable Entry: TOP
2.Thumbscrew: UNC 4-40 (Standard), M2,5 or M3 on request
Material: Steel
3.Threaded steel
Material: Steel
4.Screw RXK ST 2,9x13
Material: Steel

REVISION	CHANGES	DATE	NAME
1	First release	2024-05-24	Idriz Musliu

Note: When ordering use Part No. in the table below

Part No. Single	Part No. BULK	Product code Single	Product code BULK	Bill of material (No.)Parts of the product
6211-0100-32	6212-0100-32	DAPK15-JS-K	DAPK15-JS BULK	[1.1][2][3][4]
6211-0100-42	6212-0100-42	DAPK15-JS-MET-K	DAPK15-JS-MET - BULK	[1.2][2][3][4]


Bill of material				
No.	QTY	Part No.	Description	
1.Hood				
1.1	1	6811-0106-01	Plastic cover	
1.2	1	6811-0106-12	Metalized plastic cover	
2.Thumbscrew				
2	2	6826-0123-01	Thumbscrew adapter	
3.Threaded insert				
3	2	6859-0105-02	Threaded insert, UNC4-40	
4.Screw				
4	2	6855-0107-01	Screw RXK ST 2,9x13	

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE
IN MILLIMETERS

TOLERANCES UNLESS OTHERWISE SPECIFIED:

LINEAR:
0 ±0.20
0.0 ±0.15
0.00 ±0.10
ANGULAR:
±0.5°

SCALE: 1:1 SHEET 1 OF 1



encitech
A PART OF BEIJERTECH

Drawn by:	IMU
Date:	2024-05-22
Approved by	MRR
Approved date	2024-05-24
TITLE: DAPK15-JS-K PLASTIC COVER	
DWG NO.	6688-9357-LJS
See P/N above	

A3