
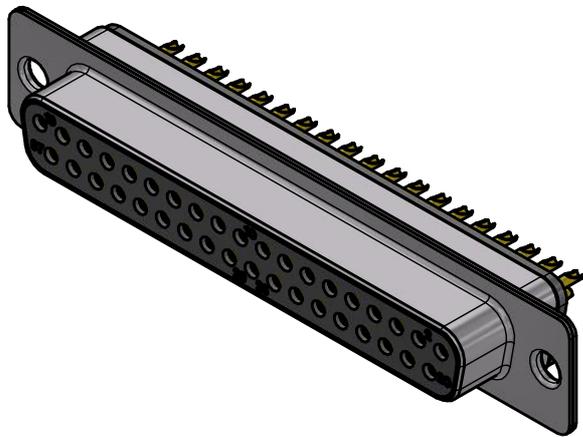


RoHS compliant

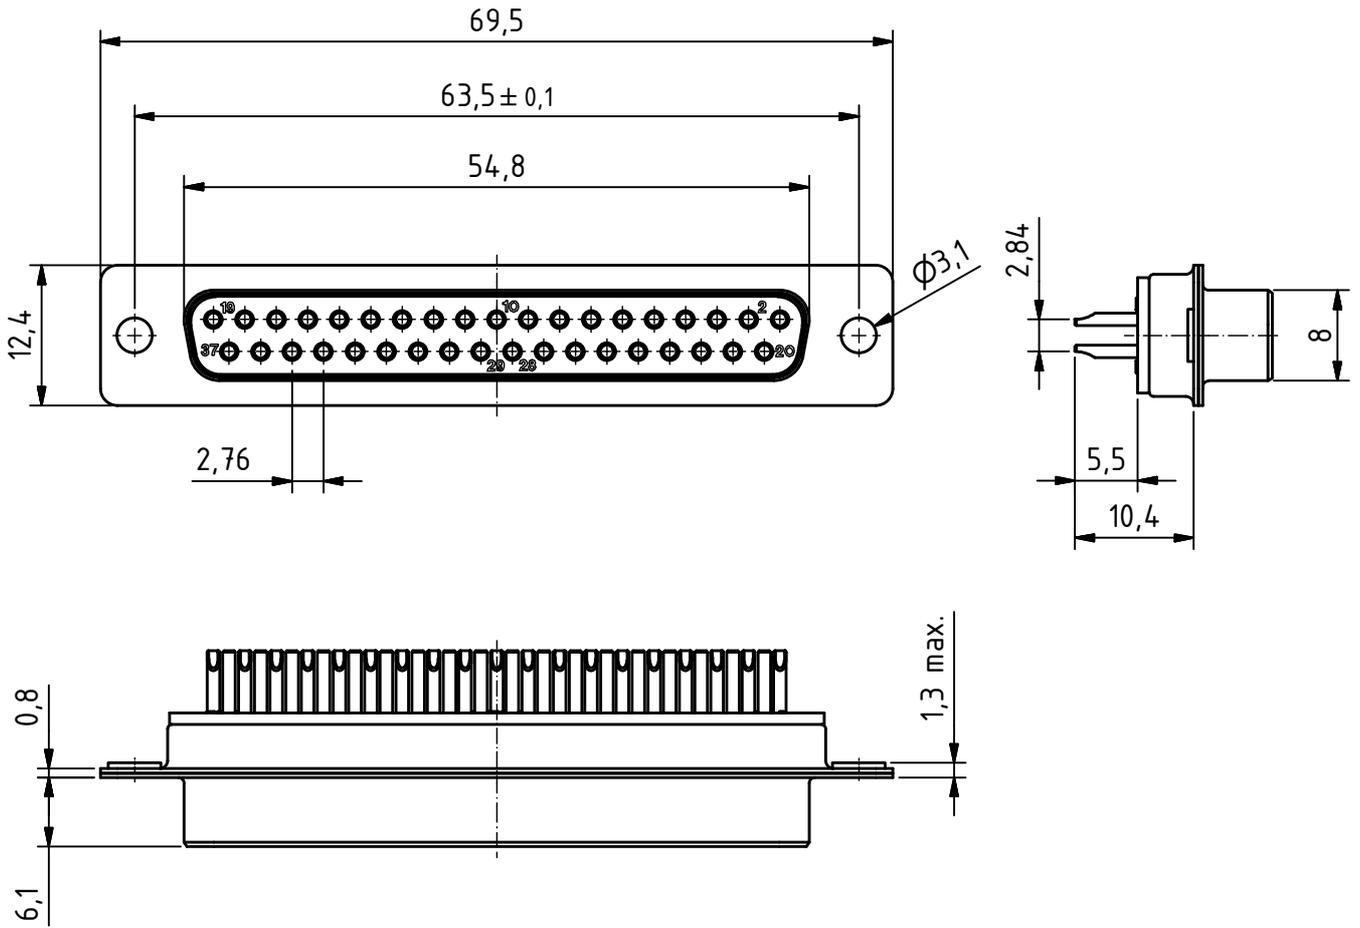

suitable for cable AWG 22

Capacitor value 1'000 pF

MATERIALS

- Insulator: Thermoplastic UL 94-V-0 black
- Contact: Machined / Copper alloy
- Contact finish: Quality class 2
- Shell: steel tin plated

CHARAKTERISTICS

- Working voltage: 100V
- Current rating: 7.5A
- Contact resistance: max. 10mΩ - DIN41652
- Insulation resistance: >1GΩ
- Temperature range: -55° to +125°C

General tolerances (Deitron standard)			
size in mm	> 0.5 up to 3	> 3 up to 6	> 6 up to 30
	> 30 up to 120		
tolerances	±0.1	±0.2	±0.2
			±0.3

modification	Rev.	Rev.	Rev.	DE002756 part no.		
	Rev.	Rev.	Rev.			
D37SZ/2FP102	1.5:1 scale	drawn	06.11.2007	mr		
		checked				
		approved				
		Industrie Neuhof 8c CH-3422 Kirchberg www.d-sub.swiss		K052012 drawing no.		