


No.	Changes and/or Note No.	Date	Sign	No.	Changes and/or Note No.	Date	Sign

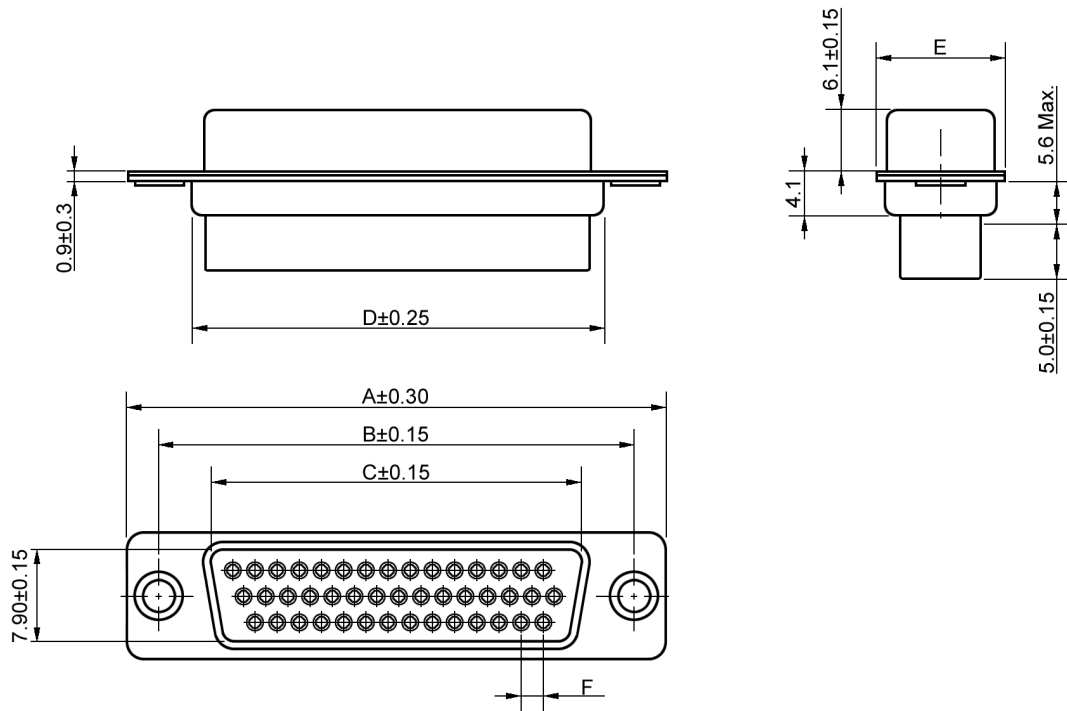

UNIT: (mm)

DIMENSIONS

Size:	A	B	C	D	E	F	Part No:
15P	30.80	25.00	16.30	19.20	12.60	2.29	2101-0390-11
26P	39.20	33.30	24.60	27.70	12.60	2.29	2101-0390-12
44P	53.10	47.10	38.30	41.10	12.60	2.29	2101-0390-13
62P	69.40	63.50	54.80	57.30	12.60	2.41	2101-0390-14
78P	67.00	61.00	52.20	55.10	15.30	2.41	2101-0390-15

MATERIAL SPECIFICATIONS:

Shell: Steel, Tin Plated (Standard)

Insulator: Glass Filled PBT, UL 94 V-0

TECHNICAL SPECIFICATIONS:

Current Rating: 5 Amp
 Insulator Resistance: 1000 MΩ Min.
 Test Voltage: 500V AC for 1 Minute
 Operating Temperature: -55°C to +105°C

DATE 2011-08-03	DRAWN MRR	SCALE	MATERIAL TYPE	
	APPROVED		REPLACES	
			HDBC-xx-SS High Density Female Crimp Housing	
			DRAWING No.	 2101-0390-1x