
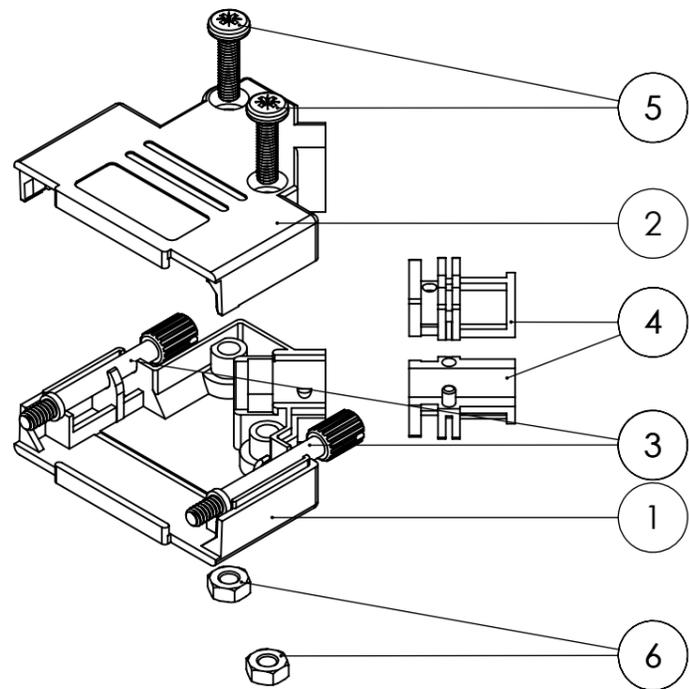
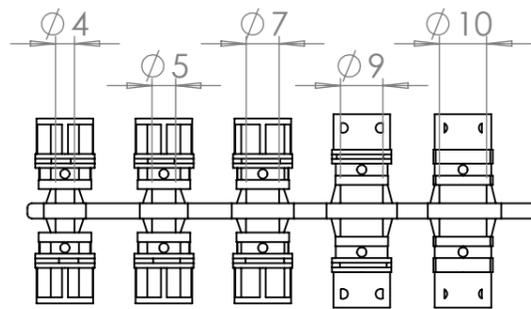
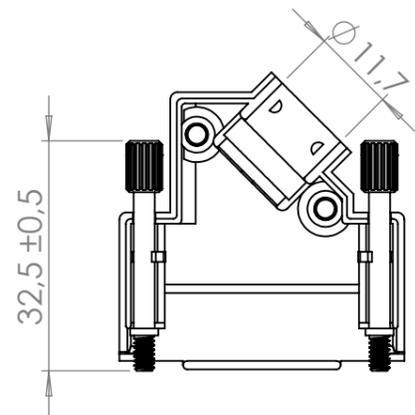
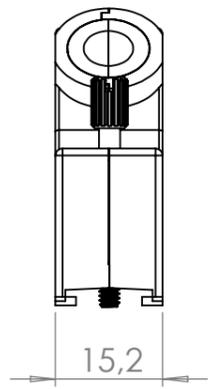


REVISION	CHANGES	DATE	NAME
1	First release	2024-02-09	Idriz Musliu

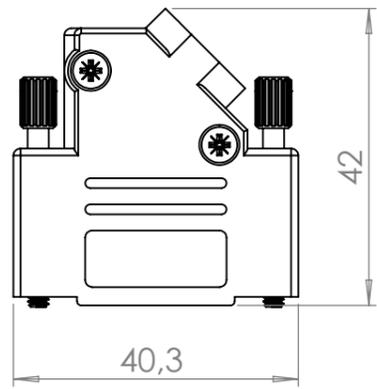

TECHNICAL SPECIFICATIONS

Operating temperature -40°C to +120°C
 Size: DA(15/HD 26)

1-2.Hood:

Material: Polyamid, UL-recognized
 Cable Entry: Side
 Maximum OD: 11,7

3.Thumbscrew: UNC 4-40 (Standard), M2,5 or M3 on request

Material: Steel

4.Grommet kit, 5 set

Material: ABS

5.Screw M3x12

Material: Steel
 Head: Pozidriv

6.Nut M3

Material: Steel

Note: When ordering use Part No. in the table below

Part No. Single	Part No. BULK	Product code Single	Product code BULK	Bill of material (No.)Parts of the product
6560-0107-12	6561-0107-12	D45PK-P-15-BK-K	D45PK-P-15-BK	[1][2][3][4][5][6]

Bill of material			
No.	QTY	Part No.	Description
1.Hood - Lower			
1	1	6805-0102-12	Plastic cover
2.Hood - Upper			
2	1	6805-0102-02	Plastic cover
3.Thumbscrew			
3	2	6826-0142-03	JSFM UNC 4-40 (Black)
4.Grommet			
4	5	6522-0121-05	Black, 5 set
5.Screw			
5	2	6855-0303-11	Screw M3x11.5 Pozidriv
6.Nut			
6	2	6855-0304-11	Nut M3 (Black)

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS


TOLERANCES UNLESS OTHERWISE SPECIFIED:

LINEAR: 0 ± 0.20
 0.0 ± 0.15
 0.00 ± 0.10

ANGULAR: ± 0.5°

Drawn by:	IMU
Date:	2024-02-07
Approved by:	MRR
Approved date:	2024-02-09

SCALE: 1:1 SHEET 1 OF 1



TITLE:	D45PK-P-15 PLASTIC COVER
DWG NO.	6688-9578
See P/N above	

A3

This drawing must not without our permission be copied, im-
parted to a third party or otherwise used without authorisa-
tion. Contravention will be prosecuted.

Denna ritning är vår egendom och skyddas enligt gällande lag
samt får ej utan vårt medgivande kopieras, delgivas annan eller
obehörigen användas.