


No.	Changes and/or Note No.	Date	Sign	No.	Changes and/or Note No.	Date	Sign


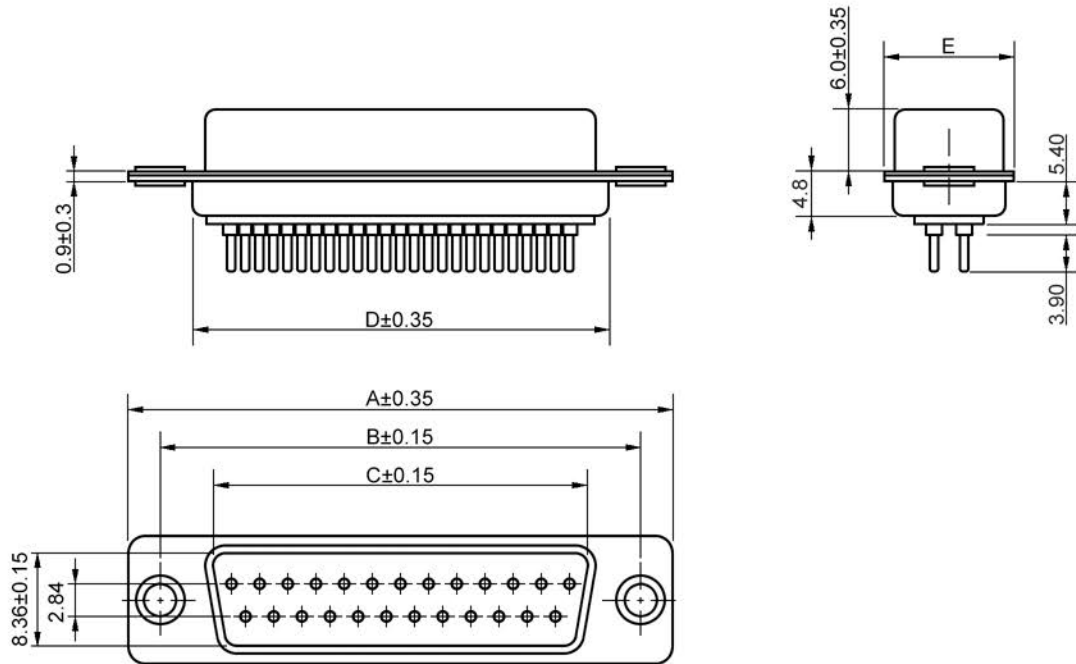


UNIT: (mm)

DIMENSIONS

Size:	A	B	C	D	E	Part No:
09P	30.80	25.00	16.92	19.20	12.60	2103-0100-01
15P	39.20	33.30	25.25	27.70	12.60	2103-0100-02
25P	53.10	47.10	38.96	41.10	12.60	2103-0100-03
37P	69.40	63.50	55.42	57.30	12.60	2103-0100-04
50P	67.00	61.00	52.81	55.10	15.30	2103-0100-05

PCB BOARD LAYOUT

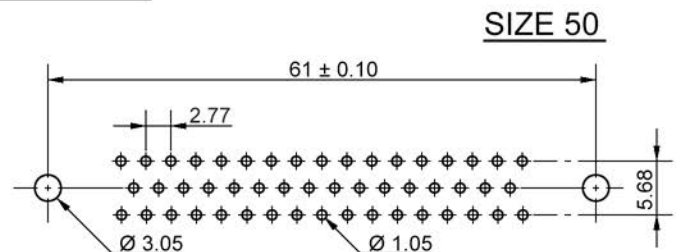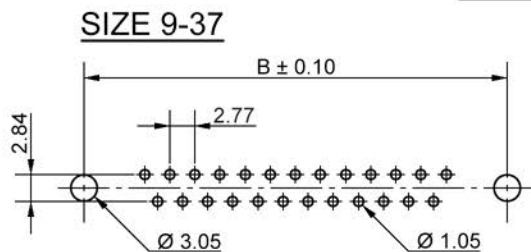

MATERIAL SPECIFICATIONS:

Shell: Steel, Tin Plated (Standard)
Zinc Plate on request
Insulator: Glass Filled PBT, UL 94 V-0
Contacts: Brass, Stamped Pins
Gold over Nickel

TECHNICAL SPECIFICATIONS:

Current Rating: 5 Amp
Contact Resistance: 10 mΩ Max.
Insulator Resistance: 1000 MΩ Min.
Test Voltage: 1000V AC for 1 Minute
Operating Temperature: -55°C to +105°C

DATE 2012-05-03	DRAWN MRR	SCALE	MATERIAL TYPE	
	APPROVED		REPLACES	
			DDxx-MTBS Sub-D Male Dip Solder Connector	
			DRAWING No.	 2103-0100-0x