


This drawing must not without our, permission be copied, im-
parted to a third party or otherwise used without authorisa-
tion. Contravention will be prosecuted.

Denna ritning är vår egendom och skyddas enligt gällande lag
samt får ej utan vårt medgivande kopieras, delgivas annan eller
obehörigen användas.

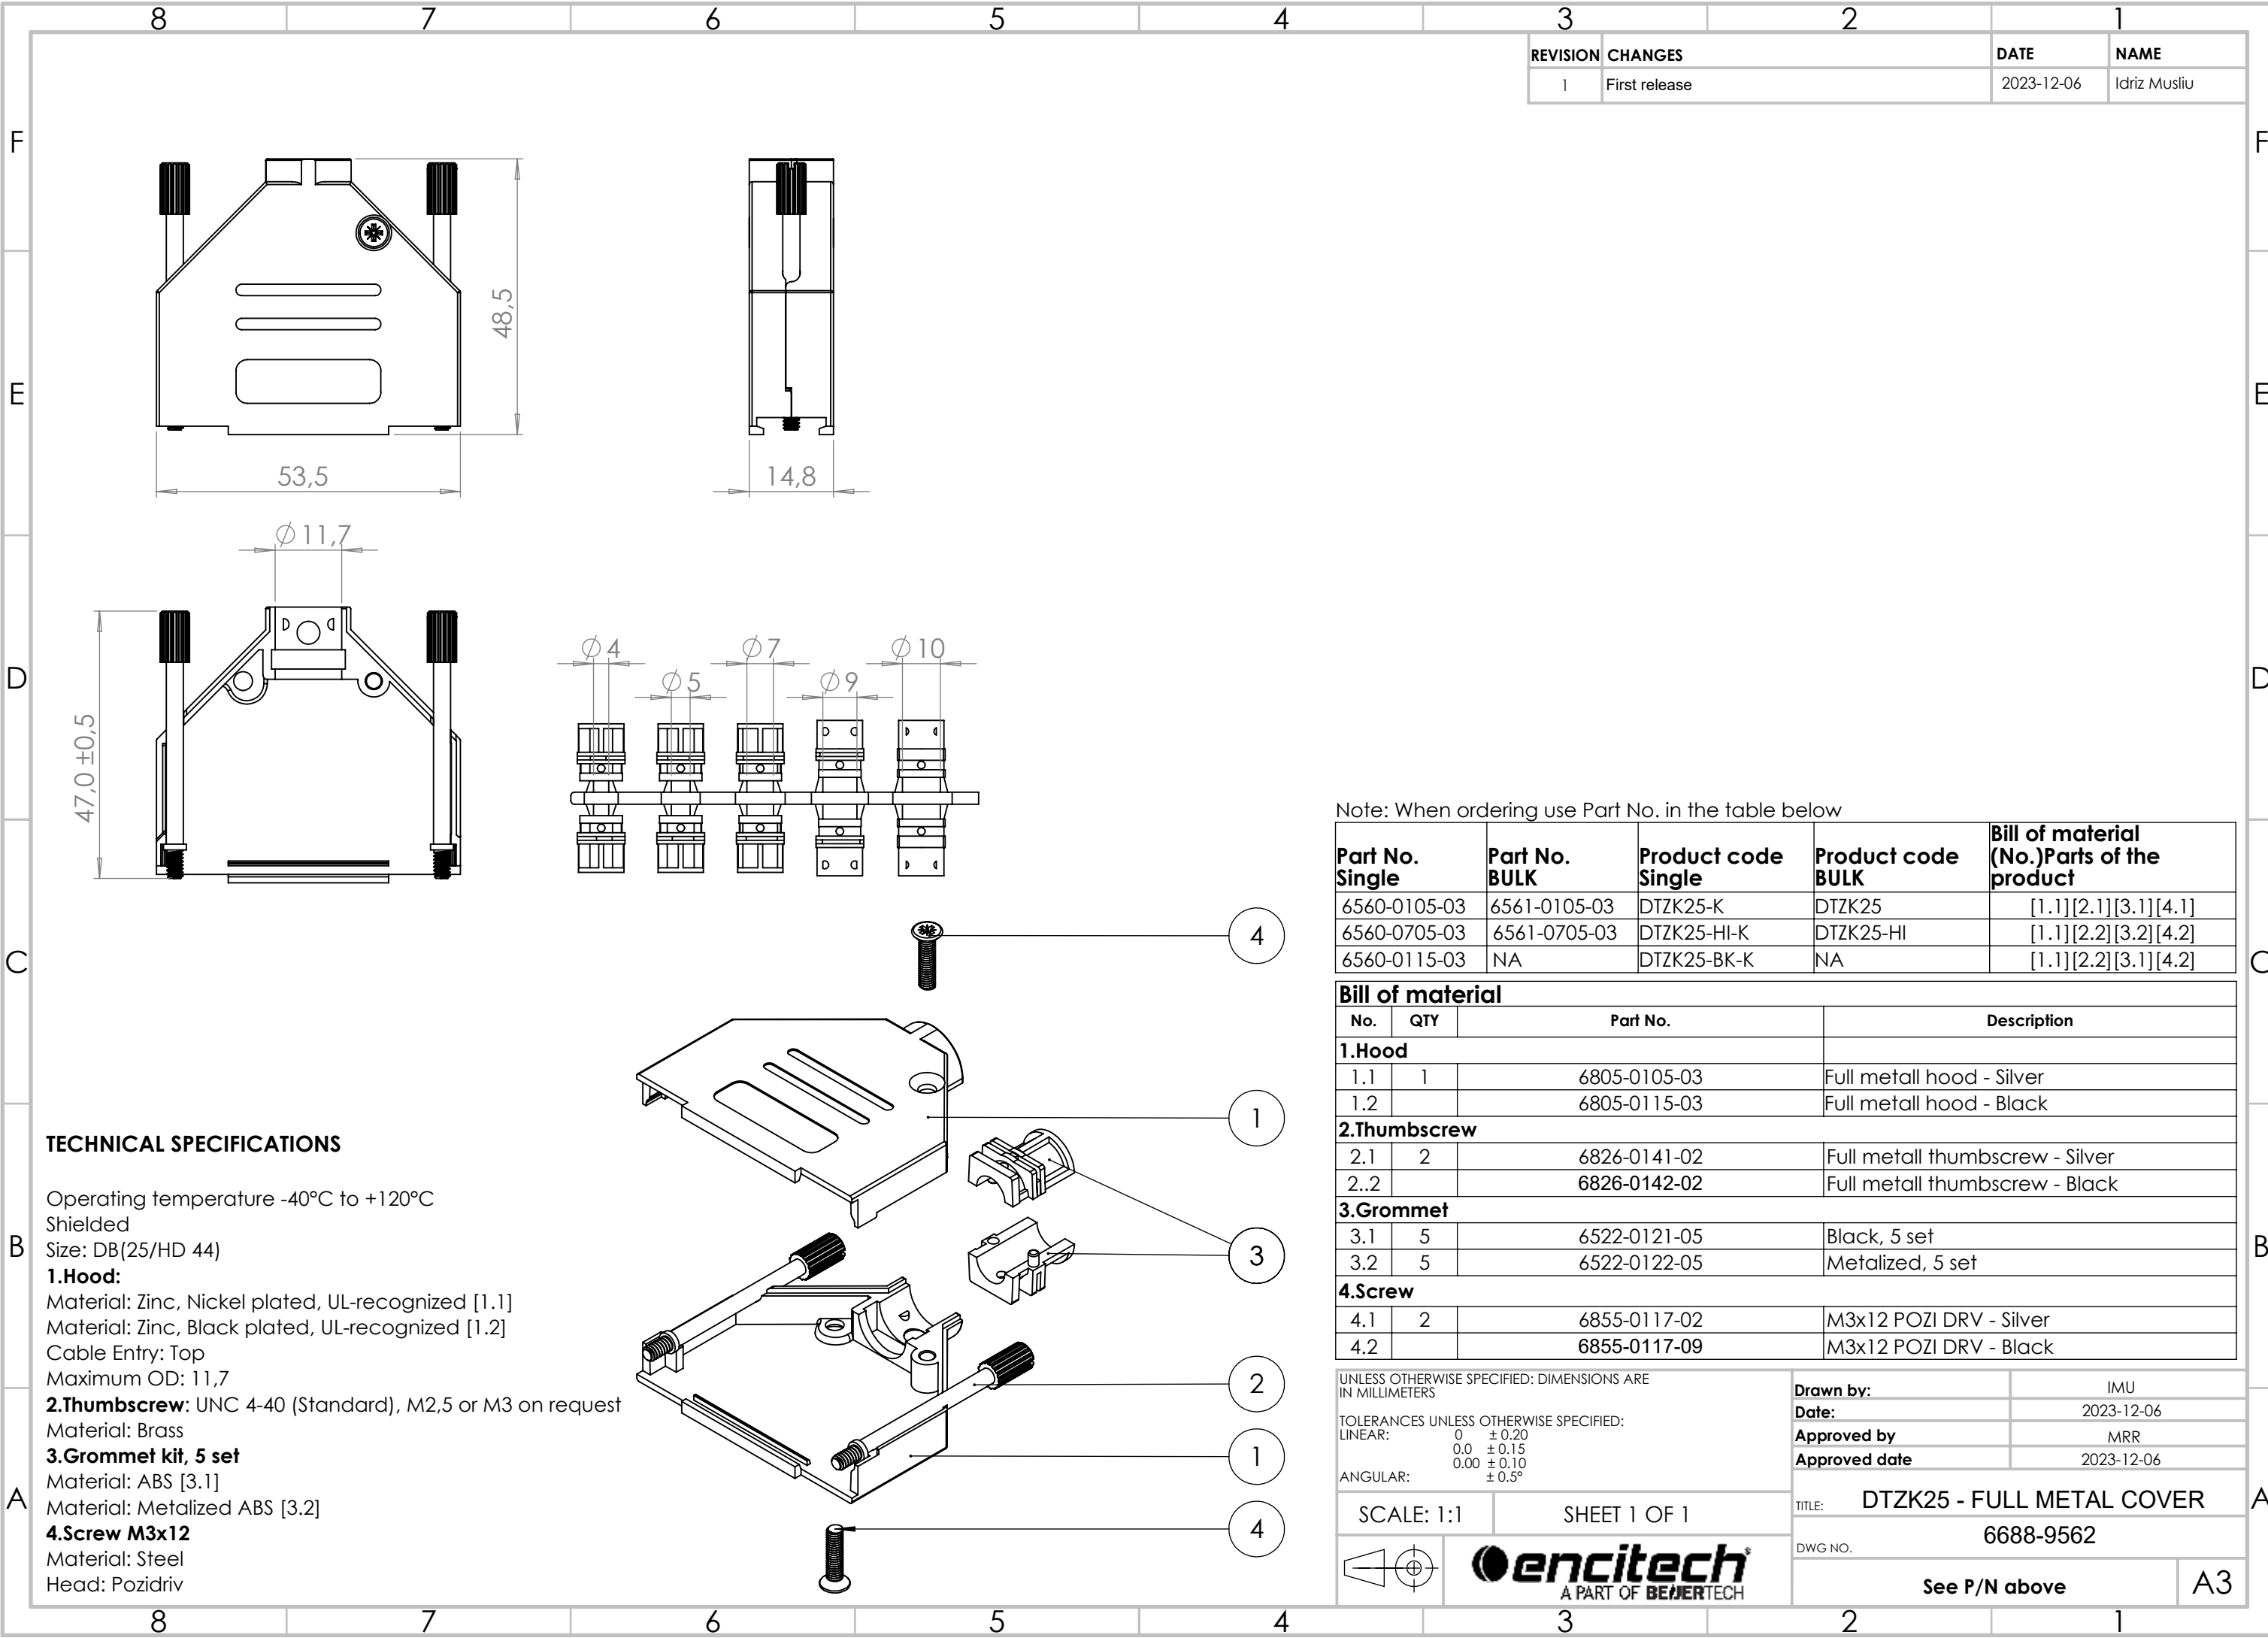

TECHNICAL SPECIFICATIONS

Operating temperature -40°C to +120°C
Shielded
Size: DB(25/HD 44)
1.Hood:
Material: Zinc, Nickel plated, UL-recognized [1.1]
Material: Zinc, Black plated, UL-recognized [1.2]
Cable Entry: Top
Maximum OD: 11,7
2.Thumbscrew: UNC 4-40 (Standard), M2,5 or M3 on request
Material: Brass
3.Grommet kit, 5 set
Material: ABS [3.1]
Material: Metalized ABS [3.2]
4.Screw M3x12
Material: Steel
Head: Pozidriv

REVISION	CHANGES	DATE	NAME
1	First release	2023-12-06	Idriz Musliu

Note: When ordering use Part No. in the table below


Part No. Single	Part No. BULK	Product code Single	Product code BULK	Bill of material (No.)Parts of the product
6560-0105-03	6561-0105-03	DTZK25-K	DTZK25	[1.1][2.1][3.1][4.1]
6560-0705-03	6561-0705-03	DTZK25-HI-K	DTZK25-HI	[1.1][2.2][3.2][4.2]
6560-0115-03	NA	DTZK25-BK-K	NA	[1.1][2.2][3.1][4.2]

Bill of material			
No.	QTY	Part No.	Description
1.Hood			
1.1	1	6805-0105-03	Full metall hood - Silver
1.2		6805-0115-03	Full metall hood - Black
2.Thumbscrew			
2.1	2	6826-0141-02	Full metall thumbscrew - Silver
2.2		6826-0142-02	Full metall thumbscrew - Black
3.Grommet			
3.1	5	6522-0121-05	Black, 5 set
3.2	5	6522-0122-05	Metalized, 5 set
4.Screw			
4.1	2	6855-0117-02	M3x12 POZI DRV - Silver
4.2		6855-0117-09	M3x12 POZI DRV - Black

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE
IN MILLIMETERS

TOLERANCES UNLESS OTHERWISE SPECIFIED:
LINEAR: 0 $\pm$ 0.20
0.0 $\pm$ 0.15
0.00 $\pm$ 0.10
ANGULAR: $\pm$ 0.5°

SCALE: 1:1 SHEET 1 OF 1



encitech
A PART OF BEIJERTECH

Drawn by:	IMU
Date:	2023-12-06
Approved by	MRR
Approved date	2023-12-06
TITLE: DTZK25 - FULL METAL COVER	
6688-9562	
DWG NO.	
See P/N above	
A3	