
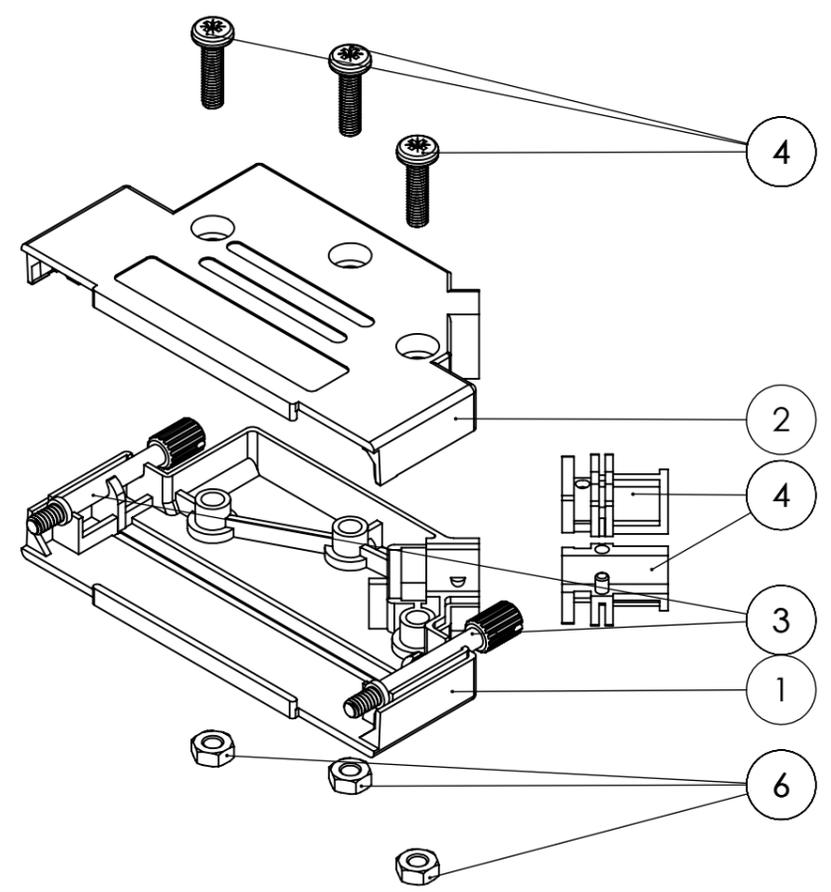
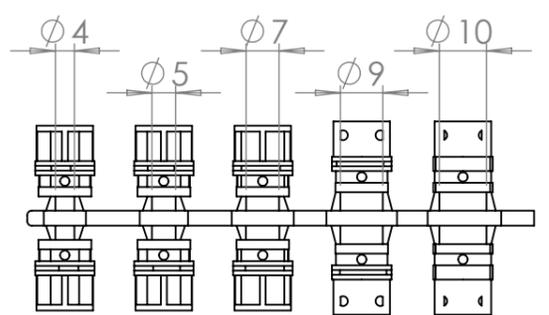
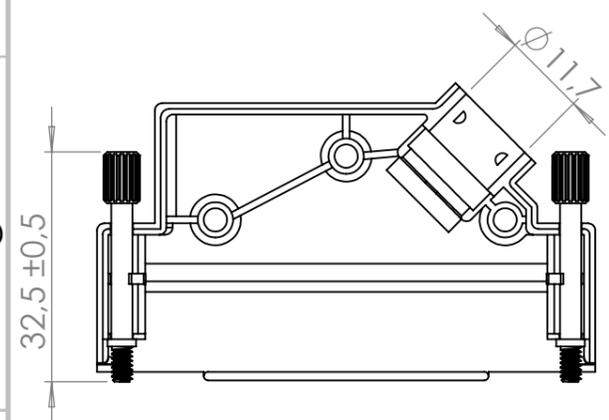
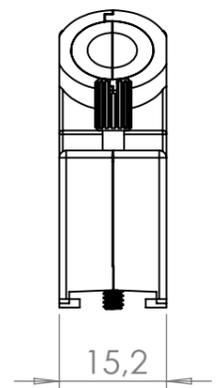


REVISION	CHANGES	DATE	NAME
1	First release	2024-02-12	Idriz Musliu

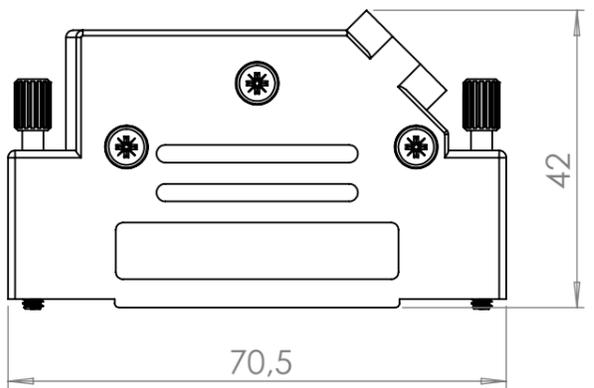

This drawing must not without our, permission be copied, im-
parted to a third party or otherwise used without authorisa-
tion. Contravention will be prosecuted.

Denna ritning är vår egendom och skyddas enligt gällande lag
samt får ej utan vårt medgivande kopieras, delgivas annan eller
obehörigen användas.

TECHNICAL SPECIFICATIONS

Operating temperature -40°C to +120°C
 Size: DC(37/HD 62)
1-2.Hood:
 Material: Nickel over copper, UL-recognized
 Cable Entry: Side
 Maximum OD: 11,7
3.Thumbscrew: UNC 4-40 (Standard), M2,5 or M3 on request
 Material: Steel
4.Grommet kit, 5 set
 Material: ABS
5.Screw M3x12
 Material: Steel
 Head: Pozi Pan
6.Nut M3
 Material: Steel

Note: When ordering use Part No. in the table below

Part No. Single	Part No. BULK	Product code Single	Product code BULK	Bill of material (No.)Parts of the product
6560-0146-14	6561-0146-14	D45PK-M-37-K	D45PK-M-37	[1][2][3][4][5][6]

Bill of material			
No.	QTY	Part No.	Description
1.Hood - Lower			
1	1	6805-0146-14	Metalized cover
2.Hood - Upper			
2	1	6805-0146-04	Metalized cover
3.Thumbscrew			
3	2	6826-0141-01	JSFM UNC 4-40
4.Grommet			
4	5	6522-0121-05	Black, 5 set
5.Screw			
5	3	6855-0303-01	Screw M3x11.5 Pozi Pan
6.Nut			
6	3	6855-0304-01	Nut M3

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS

TOLERANCES UNLESS OTHERWISE SPECIFIED:
 LINEAR: 0 ± 0.20
 0.0 ± 0.15
 0.00 ± 0.10
 ANGULAR: ± 0.5°

SCALE: 1:1 SHEET 1 OF 1



Drawn by:	IMU
Date:	2024-02-07
Approved by:	MRR
Approved date:	2024-02-12

TITLE:	D45PK-M-37 METALIZED COVER
DWG NO.	6688-9568
	See P/N above

A3