


This drawing must not without our, permission be copied, im-
parted to a third party or otherwise used without authorisa-
tion. Contravention will be prosecuted.

Denna ritning är vår egendom och skyddas enligt gällande lag
samt får ej utan vårt medgivande kopieras, delgivas annan eller
obehörigen användas.

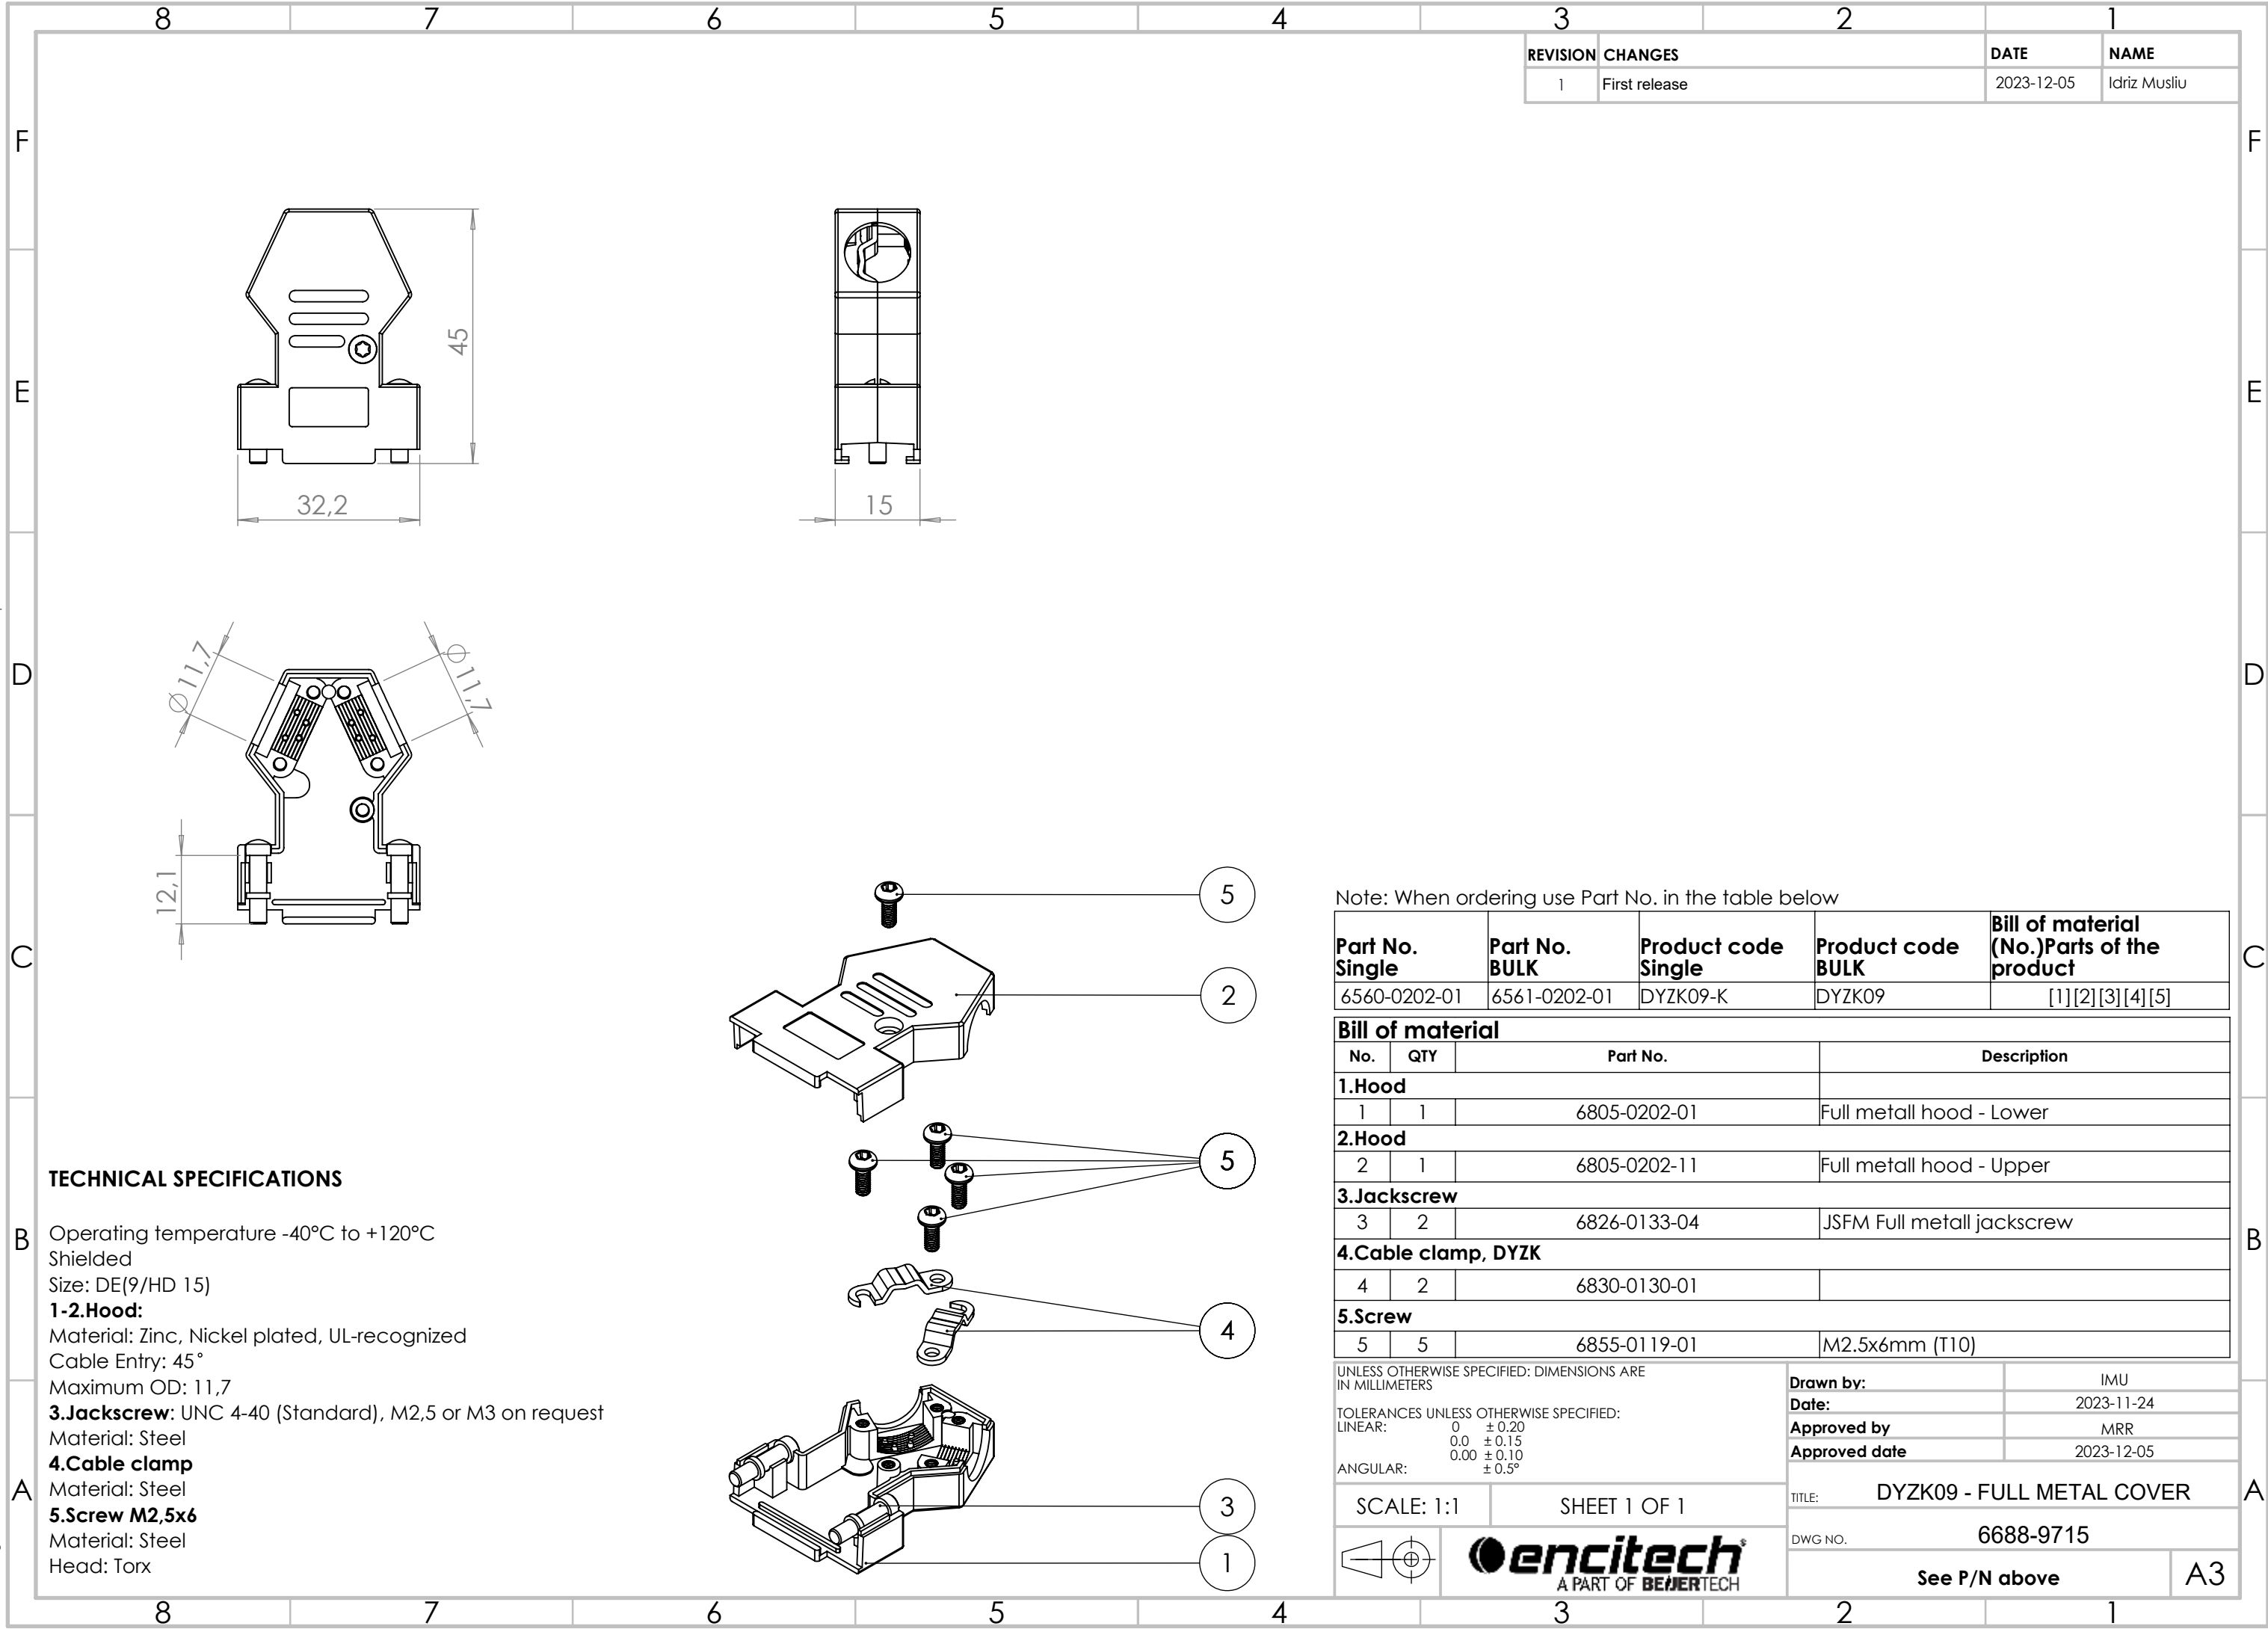


TECHNICAL SPECIFICATIONS

- Operating temperature -40°C to +120°C
Shielded
Size: DE(9/HD 15)
1-2.Hood:
Material: Zinc, Nickel plated, UL-recognized
Cable Entry: 45°
Maximum OD: 11,7
3.Jackscrew: UNC 4-40 (Standard), M2,5 or M3 on request
Material: Steel
4.Cable clamp
Material: Steel
5.Screw M2,5x6
Material: Steel
Head: Torx

REVISION	CHANGES	DATE	NAME
1	First release	2023-12-05	Idriz Musliu

Note: When ordering use Part No. in the table below

Part No. Single	Part No. BULK	Product code Single	Product code BULK	Bill of material (No.)Parts of the product
6560-0202-01	6561-0202-01	DYZK09-K	DYZK09	[1][2][3][4][5]
Bill of material				
No.	QTY	Part No.	Description	
1.Hood				
1	1	6805-0202-01	Full metall hood - Lower	
2.Hood				
2	1	6805-0202-11	Full metall hood - Upper	
3.Jackscrew				
3	2	6826-0133-04	JSFM Full metall jackscrew	
4.Cable clamp, DYZK				
4	2	6830-0130-01		
5.Screw				
5	5	6855-0119-01	M2.5x6mm (T10)	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS			Drawn by:	IMU
TOLERANCES UNLESS OTHERWISE SPECIFIED:			Date:	2023-11-24
LINEAR: 0 ± 0.20 0.0 ± 0.15 0.00 ± 0.10			Approved by	MRR
ANGULAR: ± 0.5°			Approved date	2023-12-05
SCALE: 1:1		SHEET 1 OF 1		
		TITLE: DYZK09 - FULL METAL COVER		
		DWG NO. 6688-9715		
		See P/N above		A3