



APPROVED

SIGNATURE

DATE

Revised History/变更记录表

日期
Date



修 改 内 容
Revised Specification

版本
Ver.




变更单号
ECN No.

2023-09-26 First Issue./初次发行。


01



SECTION A-A

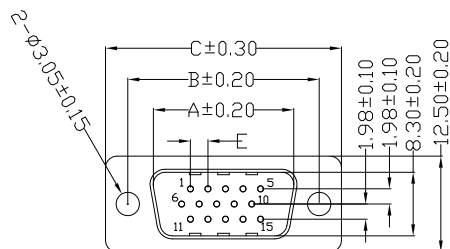

Male Connector

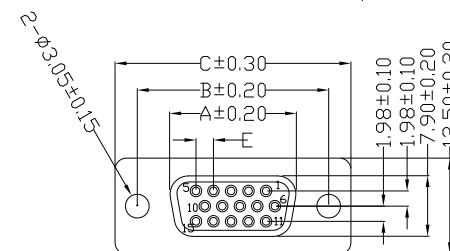

Female Connector

List:

Part Number	Description	Name
2101-0300-01	CONN, DE15 MALE, SOLDER CUP	HDS-15-MTBS
2101-0300-02	CONN, DA26 MALE, SOLDER CUP	HDS-26-MTBS
2101-0300-03	CONN, DB44 MALE, SOLDER CUP	HDS-44-MTBS
2101-0300-04	CONN, DC62 MALE, SOLDER CUP	HDS-62-MTBS
2101-0300-11	CONN, DE15 FEMALE, SOLDER CUP	HDS-15-FTBS
2101-0300-12	CONN, DA26 FEMALE, SOLDER CUP	HDS-26-FTBS
2101-0300-13	CONN, DB44 FEMALE, SOLDER CUP	HDS-44-FTBS
2101-0300-14	CONN, DC62 FEMALE, SOLDER CUP	HDS-62-FTBS

NOTES:
INSULATION RESISTANCE (MIN.) :500MOHMS
CURRENT RATING (MIN.) : 3amp AC,5amp Dc
WITHSTANDING VOLTAGE (MIN.) :500VAC
CONTACT RESISTANCE (MAX.) 30m ohms
OPERATING TEMPERATURE:-55. ~+105.

MATERIAL:
COTACT:C2680,t=0.20MM
INSULATION:PBT+30%GLASS FIBER UL94V-O
SHELL:SPCC.t=0.4mm

Male Connector

POS	A	B	C	D	E
15	16.92	25.00	30.80	19.20	2.29
26	25.25	33.30	39.20	27.70	2.29
44	38.96	47.04	53.05	41.10	2.29
62	55.42	63.50	69.40	57.30	2.41

Female Connector

POS	A	B	C	D	E
15	16.35	25.00	30.80	19.20	2.29
26	24.70	33.30	39.20	27.70	2.29
44	38.40	47.04	53.05	41.10	2.29
62	54.80	63.50	69.40	57.30	2.41

文件图径/File Path:





Description	See List			Customer Na.	ENCI	Page	1/2
Part No.	See List		Unit	mm	General Tolerance		NA
Drawing No.	CSS-DWG-2309039			Ver.	01	Customer ver.	/ Scale N/A
Approved		Checked		Drawing	Hayley		






APPROVED	
SIGNATURE	
DATE	

Revised History/变更记录表


日期 Date	修 改 内 容 Revised Specification	版本 Ver.	变更单号 ECN No.
2023-09-26	First Issue./初次发行。	01	

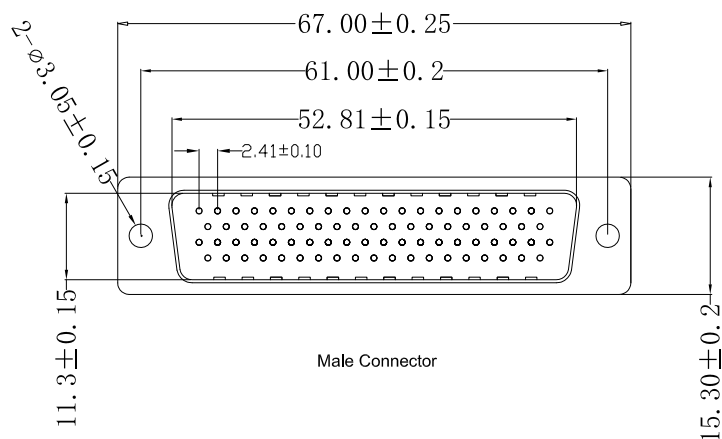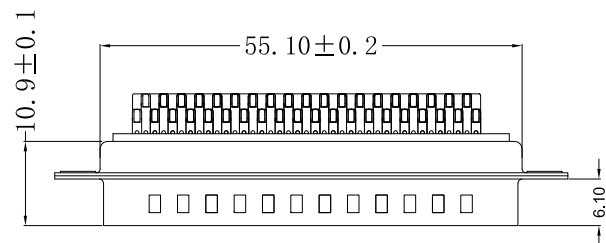

Male Connector

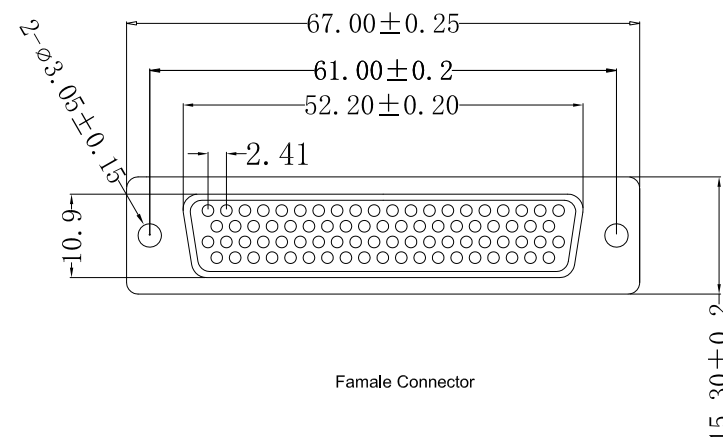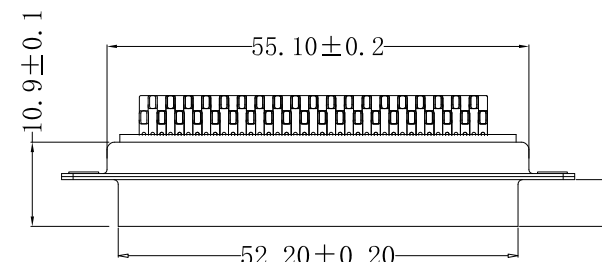

Female Connector



List:

Part Number	Description	Name
2101-0300-05	CONN, DD78 MALE, SOLDER CUP	HDS-78-MTBS
2101-0300-15	CONN, DD78 FEMALE, SOLDER CUP	HDS-78-FTBS

NOTES:

INSULATION RESISTANCE (MIN.) :500MOHMS
CURRENT RATING (MIN.) : 3amp AC.5amp Dc
WITHSTANDING VOLTAGE (MIN.) :500VAC
CONTACT RESISTANCE (MAX.) 30m ohms
OPERATING TEMPERATURE:-55_o ~+105_o

MATERIAL:

COTACT:C2680,t=0.20MM
INSULATION:PBT+30%GLASS FIBER UL94V-O
SHELL:SPCC,t=0.4mm

文件图径/File Path:



CONTINUED AS									
Description	See List				Customer Na.	ENCI		Page	2/2
Part No.	See List		Unit	mm	General Tolerance		NA		
Drawing No.	CSS-DWG-2309039		Ver.	01	Customer ver.		/	Scale	N/A
Approved		Checked			Drawing	Hayley			