




No.	Changes and/or Note No.	Date	Intr.	No.	Changes and/or Note No.	Date	Intr.

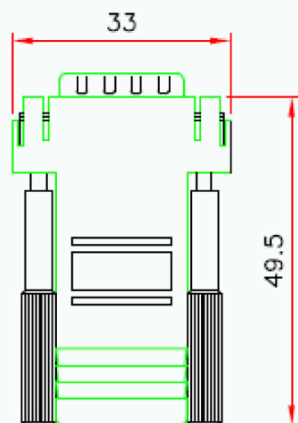

9P

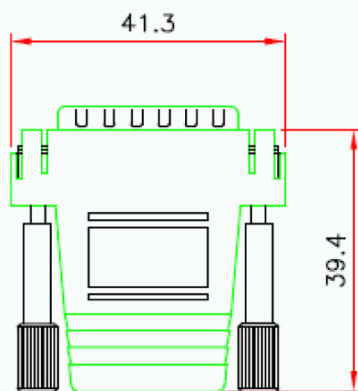

15P

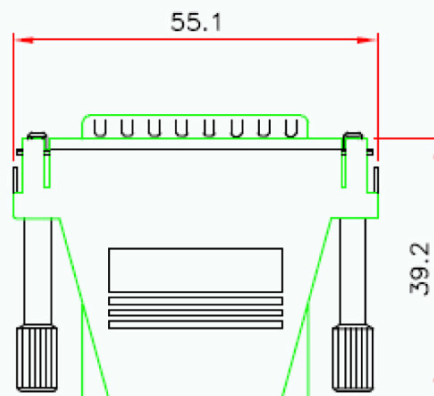

25P

SPECIFICATION

MATERIAL

Insulator: P.B.T. & Glass fill reinforced UL94V-0
Contacts: Brass(standard), Phosphor Bronze(choose)
Shell: Steel
Rivet, Board: Brass



CONTACT PLATING

Underplate: 50um Nickel
Contact area: 1 um ~30um Selective Gold
Solder tails area: 100um Tin/Lead

ELECTRICAL

Operation voltage 250 VAC max.
Current rating: 3 Amps max.
Contact resistance: 15 m Ohms max.
Insulation resistance: 3000 M Ohms min @ 500 VDC
Dielectric withstanding voltage: 1000 VAC/ minute
Operating temperature: -55°C to +105°C

Size	Part number	Description
9-ways	2112-0105-11	DA09-PMJ8-M-K-RC
15-ways	2112-0105-12	DA15-PMJ8-M-K-RC
25-ways	2112-0105-13	DA25-PMJ8-M-K-RC



A=LONG SCREWS

****ROHS****

DATE 19/11/2012	DRAWN	SCALE	MATERIAL TYPE	
	APPROVED		REPLACES	
MALE ADAPTER TO RJ45, MET.			DRAWING No	2112-0105-1X