
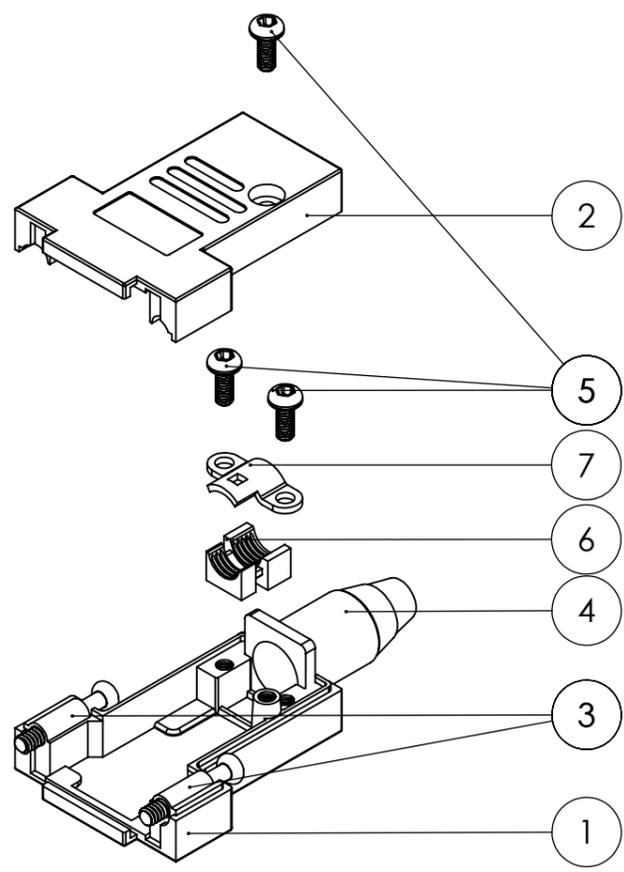
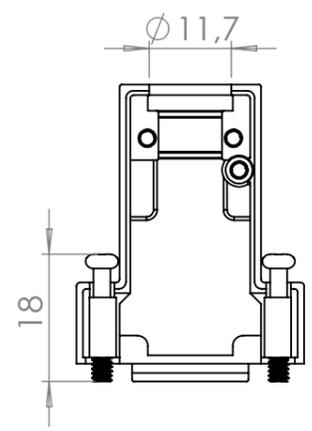
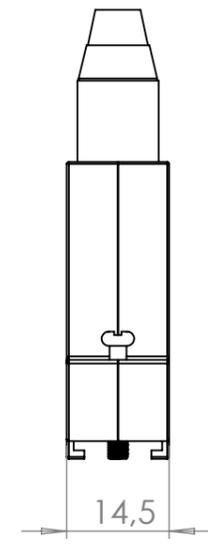


REVISION	CHANGES	DATE	NAME
1	First release	2024-01-10	Idriz Musliu

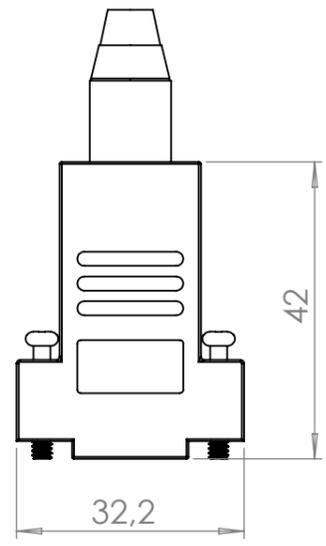

TECHNICAL SPECIFICATIONS

Operating temperature -40°C to +120°C
 Shielded
 Size: DE(9/HD 15)
1-2.Hood:
 Material: Zinc, Nickel plated, UL-recognized
 Cable Entry: Top
 Maximum OD: 11,7
3.Jackscrew: UNC 4-40 (Standard), M2,5 or M3 on request
 Material: Steel
4.Grommet
 Material: TPE
5.Screw M3x12
 Material: Steel
 Head: Torx
6.Insert
 Material: Metalized ABS
7.Cable Clamp
 Material: Steel

Note: When ordering use Part No. in the table below

Part No. Single	Part No. BULK	Product code Single	Product code BULK	Bill of material (No.)Parts of the product
6560-0217-31	6561-0217-31	DTSL09-RG-SJS-T-K	DTSL09-RG-SJS-T	[1][2][3][4][5][6][7]

No.	QTY	Part No.	Description
1.Hood			
1	1	6805-0207-11	Full metall hood - Lower
2.Hood			
2	1	6805-0207-01	Full metall hood - Upper
3.Jackscrew			
3	2	6826-0145-01	JSFM-4 Jackscrew
4.Grommet			
4	1	6844-0104-01	Rubber grommet RGS
5.Screw			
5	3	6855-0119-01	T10 Torxscrew
6.Insert			
6	1	6838-0110-32	Metalized insert DTSL09
7.Cable Clamp			
7	1	6830-0108-02	

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS
 TOLERANCES UNLESS OTHERWISE SPECIFIED:
 LINEAR: 0 ±0.20
 0.0 ±0.15
 0.00 ±0.10
 ANGULAR: ±0.5°

SCALE: 1:1 SHEET 1 OF 1

A PART OF BEIJERTECH

Drawn by:	IMU
Date:	2023-12-29
Approved by:	MRR
Approved date:	2024-01-10
TITLE:	DTSL09-RG-SJS-T FULL METAL COVER
DWG NO.:	6688-9606-2
See P/N above	
A3	

This drawing must not without our, permission be copied, im-
parted to a third party or otherwise used without authorisa-
tion. Contravention will be prosecuted.

Denna ritning är vår egendom och skyddas enligt gällande lag
samt får ej utan vårt medgivande kopieras, delgivas annan eller
obehörigen användas.