



THIS IS A RoHS
COMPLIANT
COMPONENT/
PRODUCT.

SPECIFICATIONS

1. ELECTRICAL:

UL APPLICATIONS: 250VAC MAX. AT 2 AMPS
DIELECTRIC WITHSTANDING VOLTAGE: 1000VAC. 60 SEC.
INSULATION RESISTANCE: 500 MEGA OHM
CONTACT RESISTANCE: 20 MILLI OHM

2. MECHANICAL:


STRAIN RELIEF: 20 POUND MIN.
DURABILITY: 1200 MATING CYCLES

3. MATERIAL:

HOUSING: POLYCARBONATE UL94 V-0
COLOR: TRANSPARENT
CONTACT BLADE: COPPER ALLOY
GOLD PLATING: 50U"

4. USAGE

SUITABLE FOR STRANDED OR SOLID WIRES AWG23-26
(WIRE OD 0.96 - 1.02 MM)

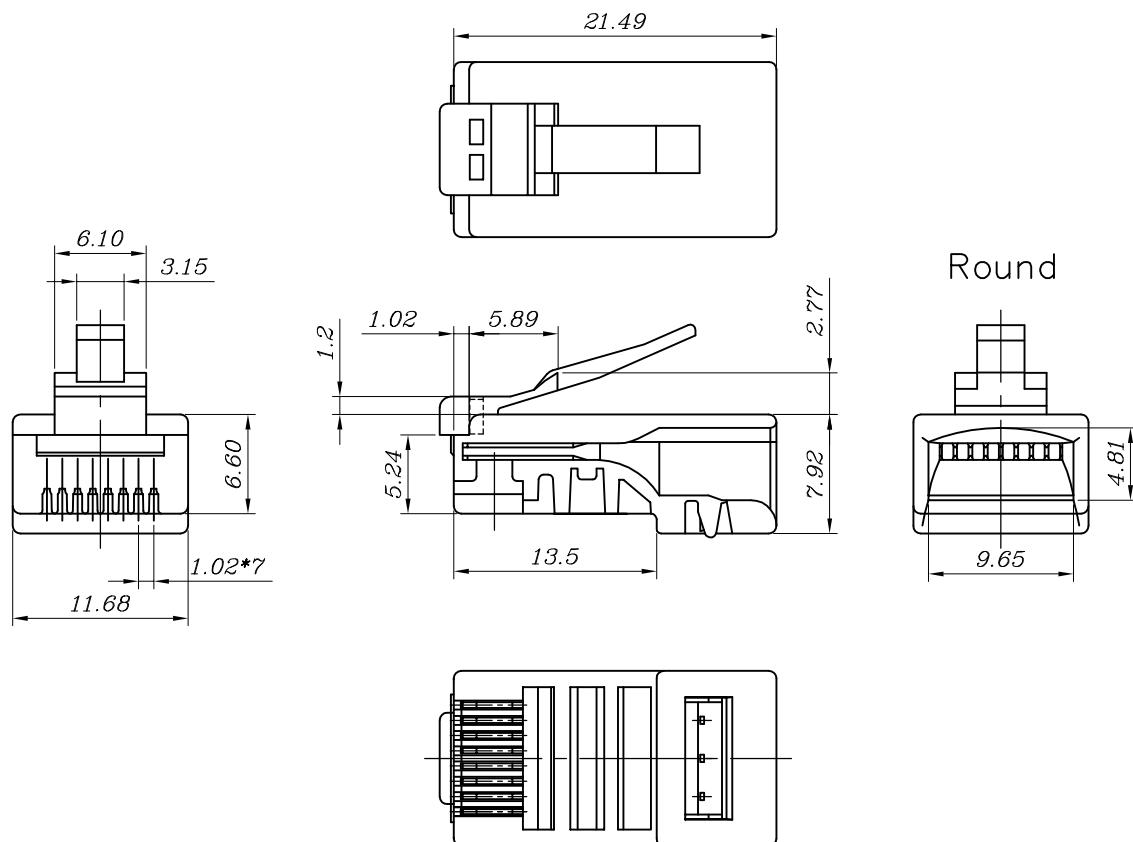

	X0	0009000	NEW DESIGN	LINGER	071307
MARK	ECN-NO.	REVISION RECORD	SCALE	DRAWN	DATE
		UNLESS OTHERWISE SPECIFIED TOLERANCE	SCALE	CHECKED	
		Dimension Range Tolerance	UNIT	APPROVED	
		X.X	±0.20	mm	
		X.XX	±0.15		
		X.XXX	±0.10	SIZE	
		ANGLE	±5°	A3	
Material/Plated/Notes		NAME			
SEE NOTE		RJ45-8P8C-R 8P8C MODULAR PLUG			
Tooling No.		Part No.	6510-0104-01		Rev.
		DOC. NO.			

Design drawing