
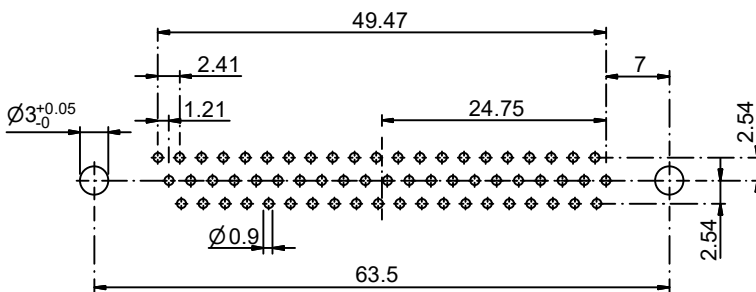
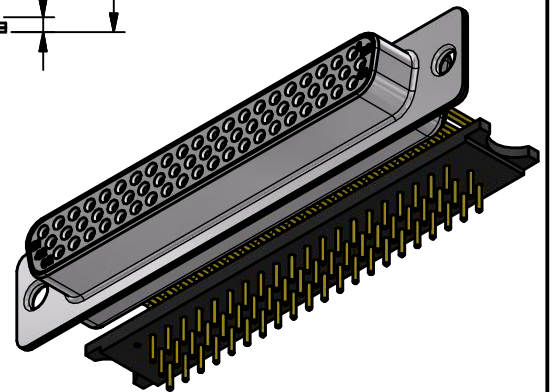
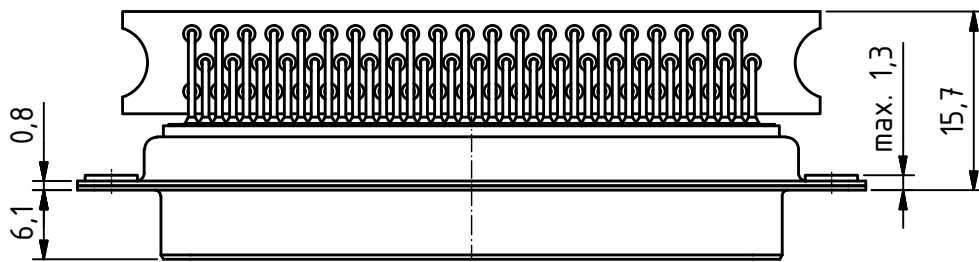
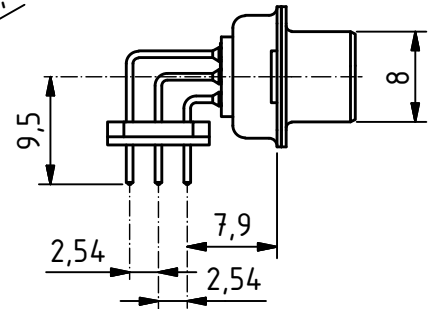


RoHS compliant

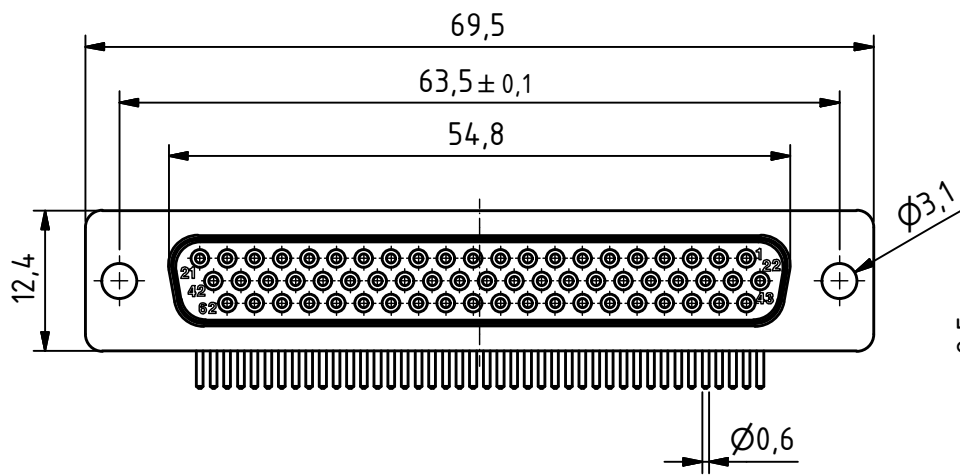

PCB Layout tolerances ± 0.1

MATERIALS

- Insulator: Thermoplastic UL 94-V-0 white
- Contact: Machined / Copper alloy
- Contact finish: Quality class 2
- Shell: steel tin plated

CHARAKTERISTICS

- Working voltage: 60V
- Current rating: 5A
- Contact resistance: max. $10m\Omega$ - DIN41652
- Insulation resistance: $>5G\Omega$
- Temperature range: -55° to $+125^{\circ}C$

General tolerances (Deltron standard)			
size in mm			
> 0.5	> 3	> 6	> 30
up to 3	up to 6	up to 30	up to 120
tolerances			
± 0.1	± 0.2	± 0.2	± 0.3

modification	Rev.	Rev.	Rev.	DE012990		
	Rev.	Rev.	Rev.	part no.		
HD-D62SYC/2	1.5:1	scale	drawn	28.06.2012	mr	
			checked			
			approved			
			Industrie Neuhof 8c CH-3422 Kirchberg www.d-sub.swiss		K060915 drawing no.	