
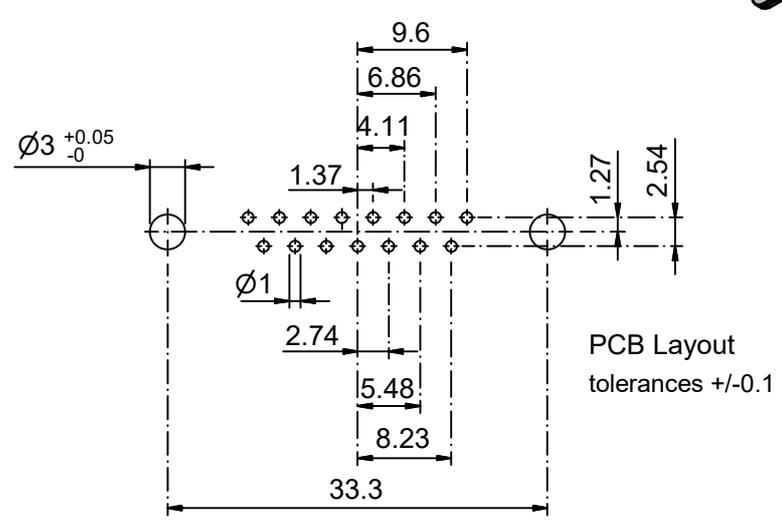
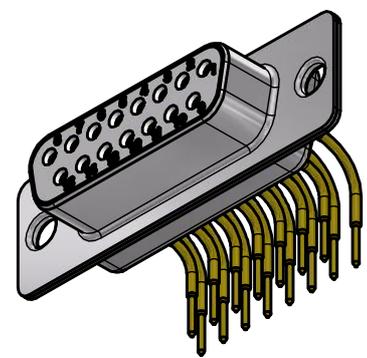
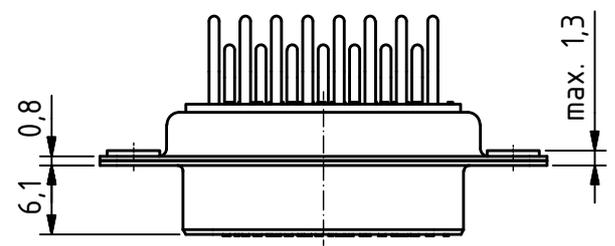
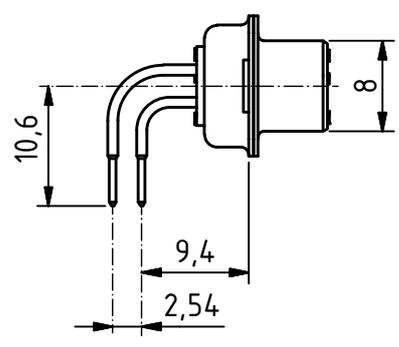


RoHS compliant

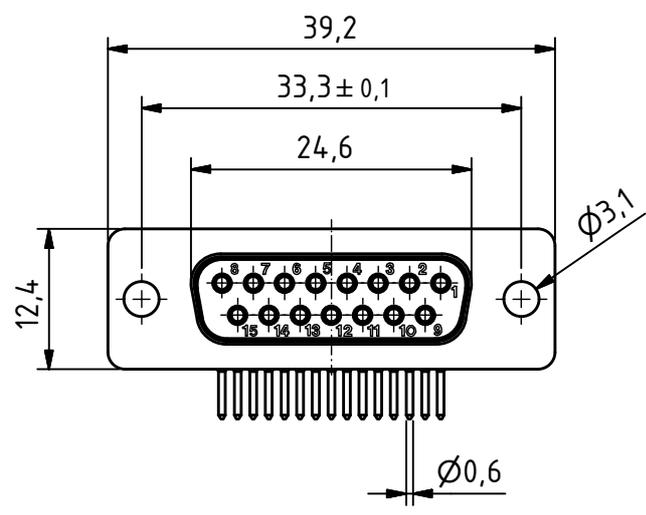

**MATERIALS**

- Insulator: Thermoplastic UL 94-V-0 white
- Contact: Machined / Copper alloy
- Contact finish: Quality class 2
- Shell: steel - zink blue chromated

**CHARAKTERISTICS**

- Working voltage: 125V
- Current rating: 7.5A
- Contact resistance: max. 10mΩ - DIN41652
- Insulation resistance: >5GΩ
- Temperature range: -55° to +125°C

General tolerances (Deltron standard)	
size in mm	
> 0.5	> 30
up to 3	up to 120
up to 6	up to 30
up to 6	up to 30
up to 6	up to 30
tolerances	
±0.1	±0.2
±0.1	±0.2
±0.1	±0.3

modification	Rev.	Rev.	Rev.	DE002139		
	Rev.	Rev.	Rev.	part no.		
DT15SYC/2	1.5:1	drawn	05.03.2015	mw		
		checked				
		approved				
		Industrie Neuhof 8c CH-3422 Kirchberg www.d-sub.swiss		K050066 drawing no.		