
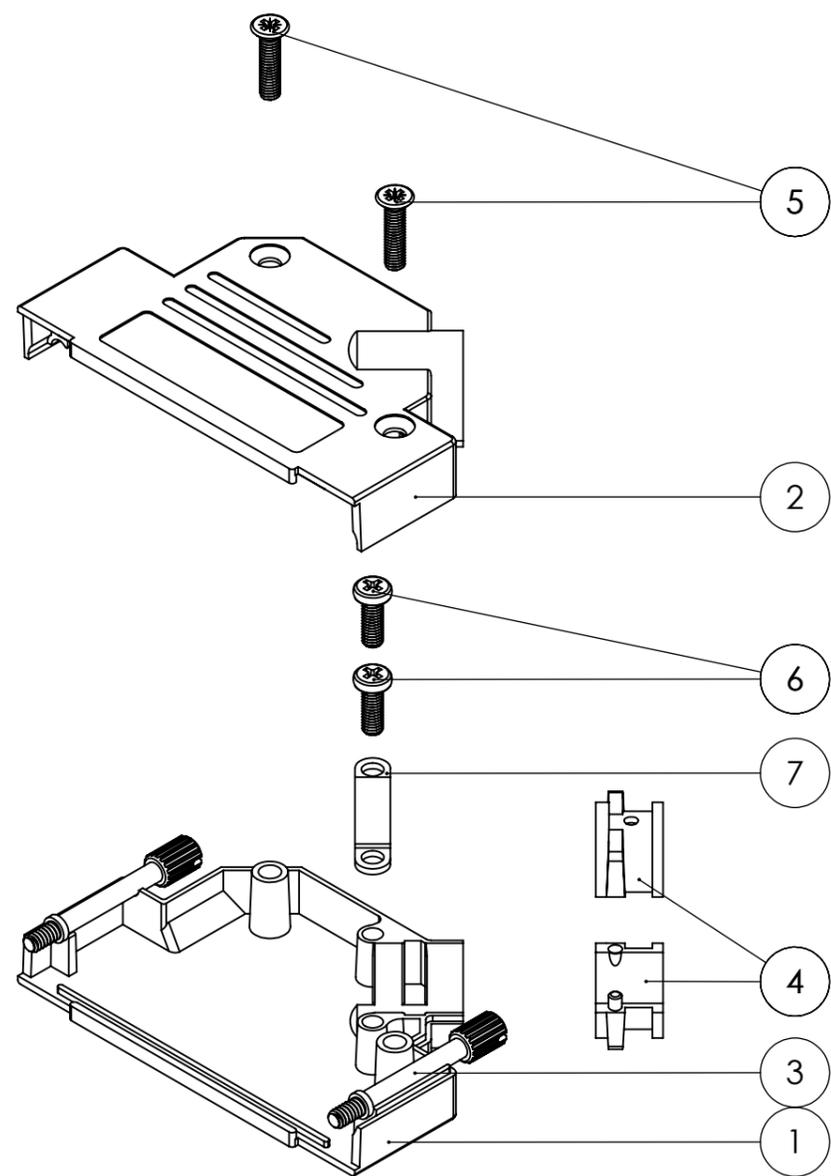
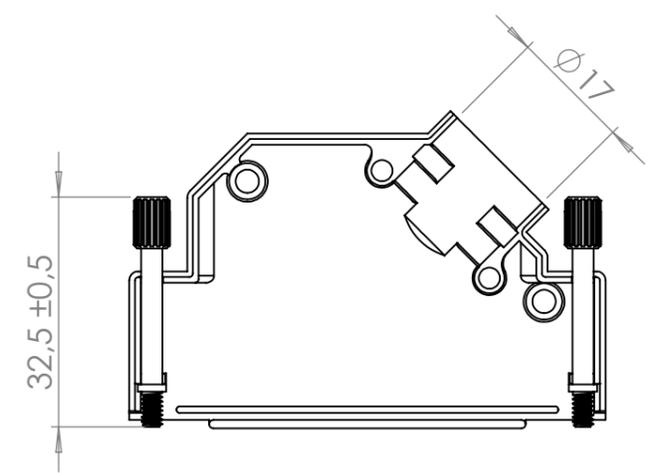
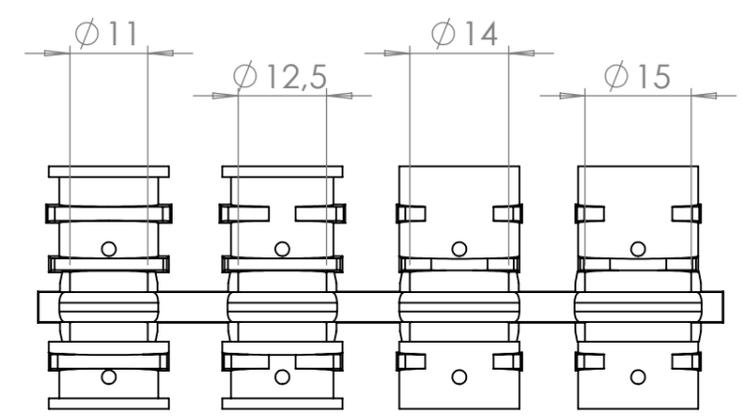
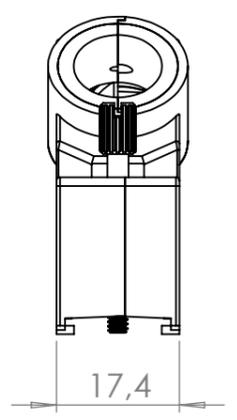


REVISION	CHANGES	DATE	NAME
1	First release	2023-11-23	Idriz Musliu

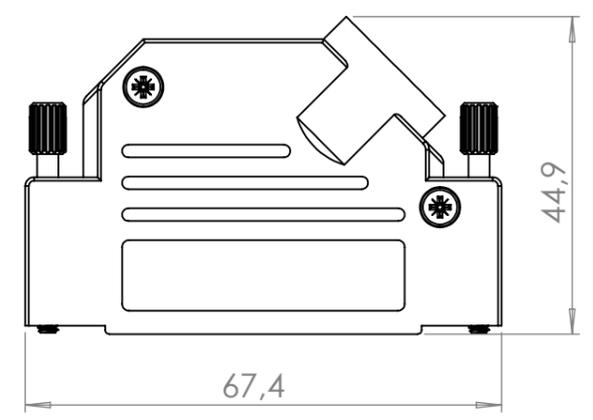

Note: When ordering use Part No. in the table below

Part No. Single	Part No. BULK	Product code Single	Product code BULK	Bill of material (No.)Parts of the product
6560-0106-15	6561-0106-15	D45ZK50-K	D45ZK50	[1][2][3][4.1][5]
6560-0706-15	6561-0706-15	D45ZK50-HI-K	D45ZK50-HI	[1][2][3][4.1][5]

No.	QTY	Part No.	Description
1.Hood			
1	1	6805-0106-15	Full metall hood - Lower
2.Hood			
2	1	6805-0106-05	Full metall hood - Upper
3.Thumbscrew			
3	2	6826-0141-01	JSFM - Full metall thumbscrew
4.Grommet			
4.1	4	6522-0121-06	Black, 4 set
4.2	4	6522-0122-06	Metalized, 4 set
5.Screw			
5	2	6855-0117-02	M3x12 POZI DRIV
6.Screw			
6	2	6855-0117-08	M3x8 PHILLIPS HEAD
7.Cable Clamp			
7	1	6830-0109-04	

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS
 TOLERANCES UNLESS OTHERWISE SPECIFIED:
 LINEAR: 0 ±0.20
 0.0 ±0.15
 0.00 ±0.10
 ±0.5°
 ANGULAR:
 ±0.5°
 SCALE: 1:1 SHEET 1 OF 1
 A PART OF BEJERTECH

Drawn by:	IMU
Date:	2023-11-23
Approved by:	MRR
Approved date:	2023-11-23
TITLE:	D45ZK50 - FULL METAL COVER
DWG NO.:	6688-9559
See P/N above	

TECHNICAL SPECIFICATIONS

Operating temperature -40°C to +120°C
 Shielded
 Size: DD(50/HD 78)
1-2.Hood:
 Material: Zinc, Nickel plated, UL-recognized
 Cable Entry: 45°
 Maximum OD: 17
3.Thumbscrew: UNC 4-40 (Standard), M2,5 or M3 on request
 Material: Brass
4.Grommet kit, 4 set
 Material: ABS[3.1]
 Material: Metalized ABS[3.2]
5.Screw M3x12
 Material: Steel
 Head: Pozidriv
6.Screw M3x8
 Material: Steel
 Head: Phillips
7.Cable clamp
 Material: Steel

This drawing must not without our, permission be copied, im-
 parted to a third party or otherwise used without authorisa-
 tion. Contravention will be prosecuted.

Denna ritning är vår egendom och skyddas enligt gällande lag
 samt får ej utan vårt medgivande kopieras, delgivas annan eller
 obehörigen användas.

