

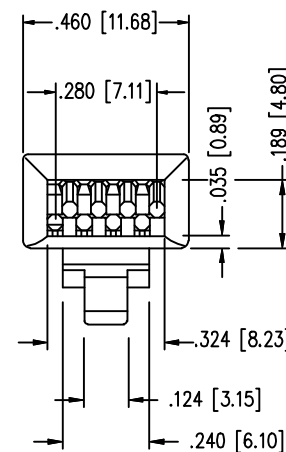
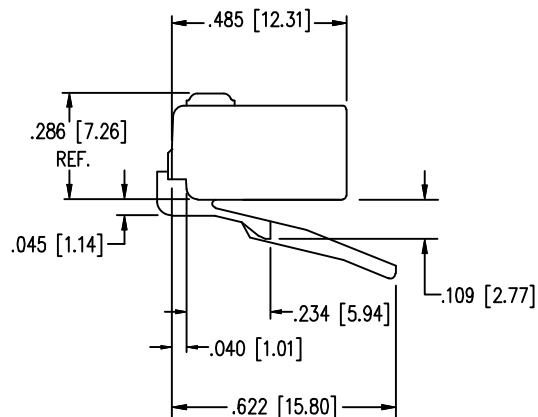





THIS IS A RoHS
COMPLIANT
COMPONENT/
PRODUCT.

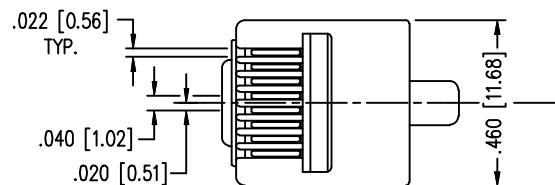

- * EIGHT CONDUCTOR MODULAR PLUG (SHORT BODY)
- * FOR HIGH SPEED APPLICATIONS
- * FOR CONDUCTORS WITH .037 - .042 OD

SPECIFICATIONS:

- ELECTRICAL:**
VOLTAGE RATING: 30VAC - 42VDC
CURRENT RATING: 1.5A
- MECHANICAL:**
DURABILITY: 1000 CYCLES
COMPLIES WITH F.C.C. REQUIREMENTS
- MATERIAL AND FINISH:**
HOUSING: POLYCARBONATE UL94 V-0
CONTACT: PHOSPHOR BRONZE
CONTACT PLATING: 50 MICRO-INCH GOLD PLATING
- ENVIRONMENTAL:**
OPERATING TEMPERATURE: -40 C TO +85 C

 X0	0009000	NEW DESIGN		Linger	060106
MARK	ECN-NO.	REVISION RECORD		DRAWN	DATE
		UNLESS OTHERWISE SPECIFIED TOLERANCE		SCALE	CHECKED
		Dimension Range Tolerance		1/2.5	eva
		X.X	±0.20	UNIT	APPROVED
		X.XX	±0.15	mm	peter
		X.XXX	±0.10	SIZE	
		ANGLE	±5°	A3	
Material/Plated/Notes		NAME			
SEE NOTE		CAT6 UNSHIELDED MOD. PLUG - SHORT BODY			
Tooling No.		PART NO. 3805-0100-01			REV.
		DOC. NO.			

Design drawing