

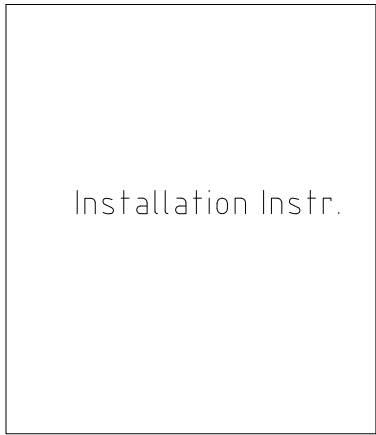


We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden. ©ROXTEC INTERNATIONAL AB


SURFACE TREATMENT POWD. COAT. RAL7035

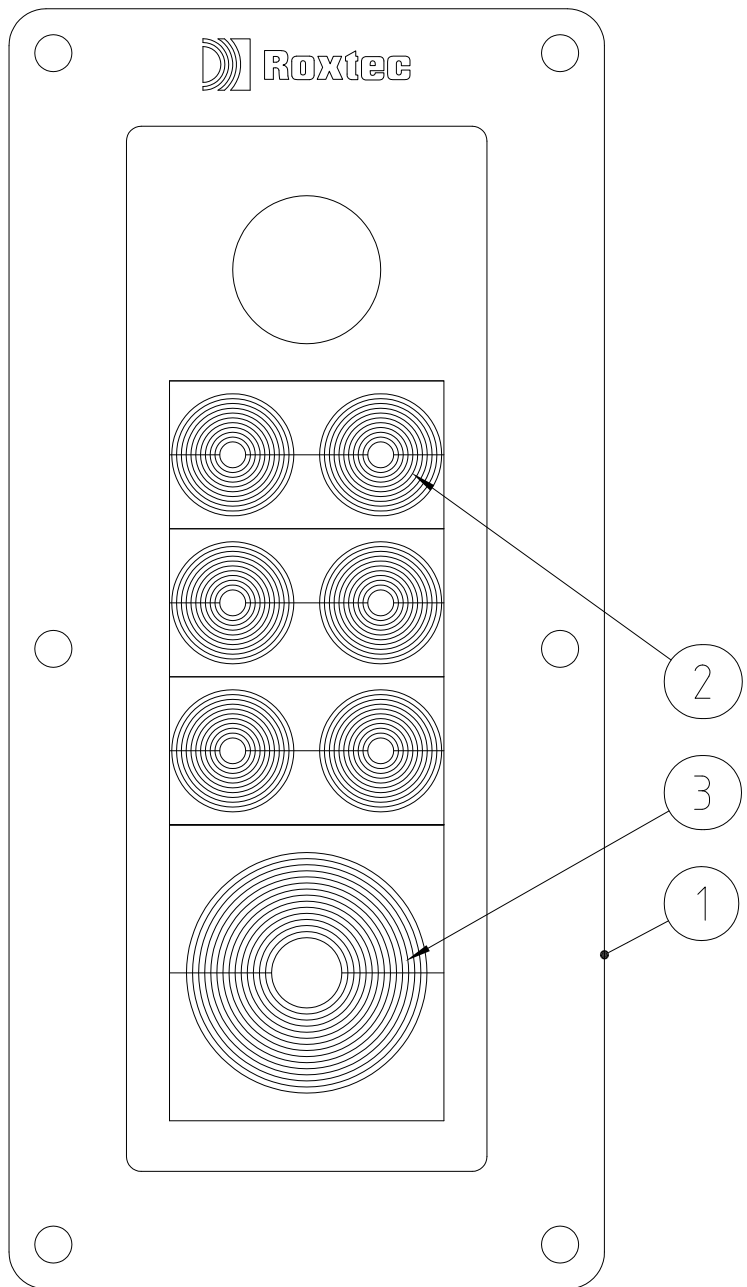


5

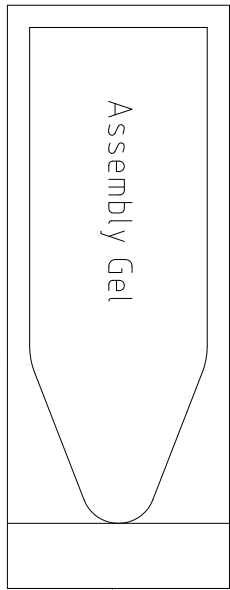


4




7



8



6

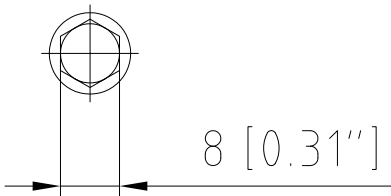

8	6	NUT	M6M M5 FE/Z-NI Black	
7	6	WASHER	RB M5 ISO 7089 Z-Ni Black	
6	6	SCREW	M6SF-TT M5X20 NYSEAL Z-Ni Bl	
5	1	INSTALLATION INSTR.		
4	1	ASSEMBLY GEL	-	
3	1	CM40 10-32	0+9.5-32.5mm	
2	3	CM 20w40	0+3.5-16.5mm	
1	1	COMSEAL 10 FRAME	POWDERCOATED ALUMINUM	
Item	Qty	Designation	Specification	Net Weight
ROXTEC INTERNATIONAL AB BOX 540 S-371 23 Karlskrona TEL: +46 455 366700 FAX: +46 455 82012		Designed by se-jenboh Approved by se-jorake	Created Date 2008-03-05 Approved Date 2012-04-04	General tolerance ISO 2768-1/2-m/K EN ISO 13920-BF Welded details EN ISO 5817-B EN ISO 10042-B General surface roughness, Ra 12,5 -
Format A3		Scale 1:1	Title COMSEAL 10/7 ASSEMBLY KIT	
Restricted due to Information Drawing		Drawing number S1013359		Projection method Rev C

C	Change to Installation instruction	2012-03-22	se-henols
Rev	Type of revision	Date	Sign